

HAAAS
+
SOHN

Warmth. Salzburg style.

QUALITY TIMES

COLLECTION 2018/19



HOME



CONTENT



HIGHLIGHTS


Quality times with HAAS+SOHN	3
Service	4
Clean technology	7

FIREPLACE STOVES

Introduction	8
Product Highlights	10
Fireplace stoves	13

FIREPLACE STOVES WITH HEAT EXCHANGER

Product Highlights	37
Fireplace stoves with heat exchanger	39



PELLET STOVES


Introduction	57
Product Highlights	59
Pellet stoves	61

FIREPLACE SETS

Introduction	65
Product Highlights	66
Assembly instructions	67
Fireplace sets	69

FIREPLACE INSERTS

Product Highlights	76
Fireplace inserts	77



FIREPLACE INSERTS WITH HEAT EXCHANGER

Product Highlights	81
Fireplace inserts with heat exchanger	84

ACCESSORIES

Flue pipes, elbows and sockets, adjustable elbows	55
Fireplace tools, cleaning sprays, draught controllers, repairing sprays	88
Glass floor plates	89
Technical parameters	90

Visit us also on





QUALITY TIMES

Warmth. Salzburg style.





QUALITY TIMES WITH HAAS+SOHN

We are intelligent warmth by design
– from Salzburg.

The rich quality of life is treasured in Salzburg – breathtaking landscapes, unspoilt nature, exquisite cuisine, world-class art and culture and a city that imparts the cosy feeling of a village despite its significance. We have made it our mission to share with you a piece of this way of life: our ovens and stoves not only provide heat, but also spread well-being and joy. With their noble design and outstanding quality, they are an additional element of what makes the international reputation of Salzburg. Our large competence centre for research, development and design in Salzburg guarantees that even in the future, we will do everything to more than fulfil our promise to you.

Our vision:

We define new standards in precision, service and comfort for the individual way of life and thereby ensure that you have

QUALITY TIMES



Long-term availability of parts also for older models




Simple and convenient ordering of spare parts from our partners in your country



Professional customer services via our partners – a professionally trained service technician is immediately at your disposal



Quick support nation-wide



More than 4,000 permanently available items in the spare parts warehouse ensure quick delivery



Manuals and technical data sheets are available for download from our website



YOUR SERVICE-PLUS

Our promise to you.

Our relationship with the customer does not end upon purchase. We guarantee the best care to you in case of service.

Regardless of how old your stove is!






TODAY, WE ALREADY ACT FOR THE FUTURE

CLEAN TECHNOLOGY for a clean and safe future.

Heating in a traditional and at the same time innovative way - our stoves and fireplace inserts make this possible. We invest a lot of effort and ingenuity in the development of our products in order to prepare them for the future. Continuous forecasting of future development and innovation together with more than 160 years of experience are our key to success.



At present, our products already fulfil the requirements of all-European emission regulations, which shall come into force in 2022. Our "CLEAN TECHNOLOGY" quality seal as a symbol of our internal ecological guidelines is used on stoves and fireplace inserts to indicate their ecological friendliness and long-term safety - because our own demands for the cleanliness and efficiency of our products are for that matter even stricter than the EU standards! All our fireplace and pellet stoves and fireplace inserts fulfil the CLEAN TECHNOLOGY seal guideline requirements. With stoves and fireplace inserts from HAAS+SOHN you thus have the best equipment for the future and you can enjoy the blissful warmth of your home with a clean conscience.

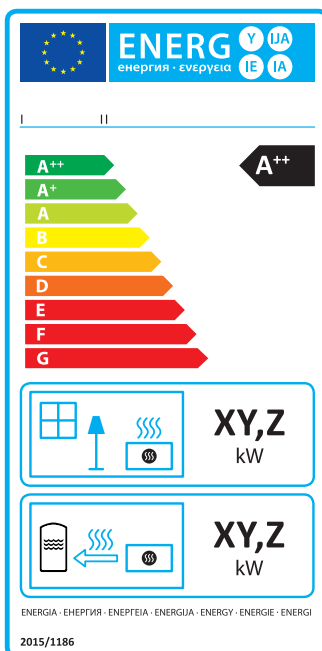

From 2018 - energy labels
for fireplace stoves

QUALITY TIMES

"Inspiration? I never have enough of it! My partner and I love visiting new places and meeting new people. This variety extraordinarily enriches my study of art. For me to enjoy this also at home, I have my own individual fireplace stove from HAAS+SOHN."



FIREPLACE STOVES



Better than watching TV

Is there anything better than sitting comfortably together in front of the stove, enjoy the heat and watch the "fiery window"? We believe that nothing beats it. For this reason, our fireplace stoves have extraordinarily large glazed surfaces for the best view of the game of flames.

Simple operation philosophy

Using our Easy Control System, operation of the stoves is very simple!

- + simple and safe operation
- + less soot black thanks to new combustion technologies
- + low cleaning requirements
- + less unpleasant fine dust
- + maximum heating cost savings
- + higher efficiency - more heat with lower wood consumption
- + unhindered view of the fire thanks to permanent rinsing of the glass
- + new, air-cooled handle





PRODUCT HIGHLIGHTS FIREPLACE STOVES



Easy air regulation control

All three air inlets – primary, secondary, and tertiary – can be regulated by just one ergonomic controller. You benefit thanks to complete combustion, thus reducing your costs.



1. Start - heating:

For adequate air intake when kindling the fire, switch to "Start" and leave it at this position till the flames spread evenly after the fuel feed.



2. Heating:

For clean and efficient combustion, push the regulator after firing up to the "operation" position.



3. Closing:


To keep the heat in the room for a longer period, switch the regulator after heating to "0". Thanks to the closable air intake, the heat from the fireplace stove will remain in the room and you can enjoy it for a long time afterwards.



Heat accumulation

For long-term radiation of heat.

Heat accumulation graph:

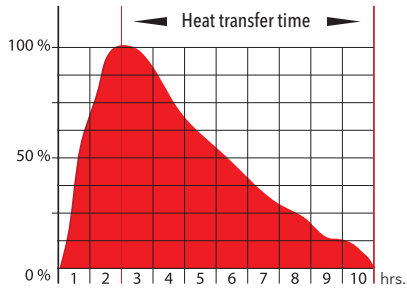

*Heat transfer time
Heat transfer time after 3 wood feeds
of 2 kg each*

After 2 hours of operation the stove is capable of emitting heat for the following 10 hours.



Closable central air inlet

When you are not currently using the stove, the central air inlet can be closed to eliminate the room's warm air loss through the stove.



Enamel technology

Long-term resistance to scratches, easy to clean.



Tertiary combustion

The process of utilization of residual flammable gases, which would be released together with smoke through the chimney under normal circumstances. This increases efficiency and results in a reduction of fuel consumption.



External combustion air supply

The option of a combustion air supply from outside. Heated air from the room is not burned. This is very suitable for well-insulated rooms.



Reflective glass

Special reflective glass with a reflective layer reflects back into the hearth heat which would otherwise heat up normal glass to a much higher temperature.



Replaceable exchanger

The heat exchanger can be added to stoves or removed and replaced with the dummy plug at any time. This feature is advantageous in cases when the stove is connected or disconnected from the heating system. Overall stove servicing is simplified due to this feature.





Paint options – individual colour schemes

The standard supplied white/grey colour can be changed to any colour tint you wish.



Traditional and fashionable element – tiled facing

HAAS+SOHN tiled stoves combine the latest technology with the beauty of a traditional tiled facing. Available

choices include both classic decor and simple modern shapes which will enhance every interior. For tiles, soft colour tints and haris cracks in the glaze enhancing the design's uniqueness, are natural.



Tiled facing

Natural element – stone facing

HAAS+SOHN uses natural stone as the design element in a number of its products.

As a natural element, every piece of stone should be seen as unique as far as its colour and structure.



Sandstone



Speckstein



White Rock



Woodstone Prestige



ADRIA MINI II

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed

MODEL	ADRIA MINI II
Colour	black / beige ceramics
Efficiency	78 % A
Capacity	2.5-8.2 kW
Dimensions h / w / d	890 / 546 / 414 mm
Order nr.	0431715010000



1



2

ALYTUS

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

• Closable air inlet

• 3-point closing

MODEL	ALYTUS 1	ALYTUS 2	COVER CAP WHEN USING REAR FLUE
Colour	anthracite / havana tile	black / white tile	Tile colour white havana
Efficiency	82 % A*	82 % A*	Order nr. 0435015006100
Capacity	2.7–8.1 kW	2.7–8.1 kW	0435015016100
Dimensions h / w / d	1,002 / 550 / 566 mm	1,002 / 550 / 566 mm	
Order nr.	0435015000000	0435015300000	



1



2

ARKTIC / ARKTIC 12 WITH HOTPLATE

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

- Replaceable exchanger – Arctic 12 with hotplate
- Logs 50 cm
- Option of side stoking

MODEL	ARKTIC	1	ARKTIC 12 WITH HOTPLATE	2
Colour	black		black	
Efficiency	80 %	A ⁺	76 %	A
Capacity	3.4-12 kW		4-12.3 kW	
Dimensions h / w / d	806 / 670 / 346 mm		827 / 649 / 574 mm	
Order nr.	0470315000000		0470615100000	



AVESTA

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Closable air inlet
- 3-point closing

MODEL	AVESTA
Colour	black / Woodstone Prestige
Efficiency	82 % A+
Capacity	2.7–8.1 kW
Dimensions h / w / d	962 / 524 / 566 mm
Order nr.	0435016100000



1



2



3



4

EBOLI

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

• Paint options

COVER CAP WHEN USING REAR FLUE

Tile colour brown tile
green tile
caramel tile
tabak tile

Order nr. 0332215006103
0332215016103
0332215046103
0332215066103

MODEL	EBOLI 1	EBOLI 2	EBOLI 3	EBOLI 4
Colour	black / brown tile	black / green tile	black / caramel tile	black / tabak tile
Efficiency	77 % A	77 % A	77 % A	77 % A
Capacity	2.6-8.4 kW	2.6-8.4 kW	2.6-8.4 kW	2.6-8.4 kW
Dimensions h / w / d	992 / 695 / 504 mm	992 / 695 / 504 mm	992 / 695 / 504 mm	992 / 695 / 504 mm
Order nr.	0332215500000	0332215510000	0332215540000	0332215560000



EMPOLI

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

· Paint options

COVER CAP WHEN USING REAR FLUE

Tile colour brown tile
green tile
bordeaux tile
caramel tile

Order nr. 0332215006103
0332215016103
0332215026103
0332215046103

MODEL	EMPOLI ¹	EMPOLI ²	EMPOLI ³	EMPOLI ⁴
Colour	black / brown tile	black / green tile	black / bordeaux tile	black / caramel tile
Efficiency	77 % A	77 % A	77 % A	77 % A
Capacity	2.6-8.4 kW	2.6-8.4 kW	2.6-8.4 kW	2.6-8.4 kW
Dimensions h / w / d	992 / 695 / 504 mm	992 / 695 / 504 mm	992 / 695 / 504 mm	992 / 695 / 504 mm
Order nr.	0332215200000	0332215210000	0332215220000	0332215240000



1



2

HUSUM

HIGHLIGHTS



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Rotating grate
- 3-point closing

MODEL	HUSUM ¹	HUSUM ²
Colour	black	grey / champagne
Efficiency	80 % A+	80 % A+
Capacity	2.9-6.5 kW	2.9-6.5 kW
Dimensions h / w / d	1,153 / 560 / 540 mm	1,153 / 560 / 540 mm
Order nr.	0420615120000	0420615110000



KALIX

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

• Closable air inlet

• 3-point closing

MODEL	KALIX
Colour	black / White Rock sides
Efficiency	82 % A+
Capacity	2.7–8.1 kW
Dimensions h / w / d	972 / 514 / 566 mm
Order nr.	0435016500000



1



2

LEVANGER

HIGHLIGHTS



Easy control

Easy control air inlet regulation - easy air supply regulation control with just one regulator

YOUR BENEFITS

- Possibility to add a central air intake
- Cast iron door

MODEL	LEVANGER 1	CENTRAL AIR INTAKE 2	ADAPTOR 130/150
Colour	black		
Efficiency	77 % A		
Capacity	2.1-6.2 kW		
Dimensions h / w / d	900 / 490 / 401 mm		
Order nr.	0434817600000	0434817001320	0434815005450



LIVORNO

MODEL	LIVORNO
Colour	anthracite / sandstone
Efficiency	81 % A+
Capacity	2.4-7.5 kW
Dimensions h / w / d	1,027 / 550 / 380 mm
Order nr.	0427515171000



MALUNG RAINBOW


MODEL	MALUNG RAINBOW
Colour	anthracite / sandstone
Efficiency	74 % A+
Capacity	5-7.5 kW
Dimensions h / w / d	907 / 555 / 406 mm
Order nr.	0430415530000



MANTA TILED TOP PLATE + PEDESTAL

HIGHLIGHTS

 **Tertiary combustion**
double combustion saves the amount of fuel needed

 **External combustion air supply**
ideal for low-energy houses

MODEL	MANTA 1	MANTA 2	MANTA 3	COVER CAP WHEN USING REAR FLUE
Colour	black / brown tile	black / honey cake	black / green tile	Tile colour brown tile honey cake green tile
Efficiency	81 % A+	81 % A+	81 % A+	
Capacity	2.3-7.2 kW	2.3-7.2 kW	2.3-7.2 kW	
Dimensions h / w / d	856 / 740 / 547 mm	856 / 740 / 547 mm	856 / 740 / 547 mm	
Order nr.	0434215000000	0434215010000	0434215020000	Order nr. 0434215006111 0434215016111 0434215026111



MANTA TILED LEDGE BASE + PEDESTAL

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



External combustion air supply
ideal for low-energy houses

MODEL	MANTA 1	MANTA 2	MANTA 3
Colour	black / brown tile	black / honey cake	black / green tile
Efficiency	81 % A+	81 % A+	81 % A+
Capacity	2.3-7.2 kW	2.3-7.2 kW	2.3-7.2 kW
Dimensions h / w / d	856 / 740 / 547 mm	856 / 740 / 547 mm	856 / 740 / 547 mm
Order nr.	043421510000	0434215110000	0434215120000



1



2



3

NORDBY

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Closable air inlet
- 3-point closing
- Just 5 cm from the wall

MODEL	NORDBY ¹	NORDBY ²	WOOD BOX ³
Colour	black / Woodstone Prestige	black / Speckstein Antik	black
Efficiency	80 % A+	80 % A+	
Capacity	2-6.4 kW	2-6.4 kW	
Dimensions h / w / d	1,025 / 701 / 367 mm	1,025 / 701 / 367 mm	
Order nr.	042201750000	0422017510000	0422017600000



NORDIC

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed

MODEL	NORDIC
Colour	black
Efficiency	78 % A
Capacity	2.6-8.7 kW
Dimensions h / w / d	685 / 640 / 330 mm
Order nr.	0470215110000



SALERNO II

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

• Closable air inlet

• Ideal solution for low-energy houses

	MODEL	SALERNO II ¹	SALERNO II ²
Colour		anthracite / cast grey	black / glass top plate
Efficiency		84 % A+	84 % A+
Capacity		2.1-4.4 kW	2.1-4.4 kW
Dimensions h / w / d		993 / 502 / 386 mm	984 / 502 / 386 mm
Order nr.		0420414500000	0420414580000



2



3



1

SAVONA

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Closable air inlet
- 3-point closing

MODEL	SAVONA 1	SAVONA 2	SAVONA 3
Colour	black / white tile	anthracite / chocolate brown	anthracite / black tile
Efficiency	81 % A+	81 % A+	81 % A+
Capacity	2.7-8.1 kW	2.7-8.1 kW	2.7-8.1 kW
Dimensions h / w / d	962 / 524 / 566 mm	962 / 524 / 566 mm	962 / 524 / 566 mm
Order nr.	0435016000000	0435016210000	0435016220000



1



2

SKARNES

HIGHLIGHTS



Easy control

Easy control air inlet regulation - easy air supply regulation control with just one regulator

YOUR BENEFITS

- Possibility to add a central air intake
- Cast iron door
- Logs 50 cm

	MODEL SKARNES 1	CENTRAL AIR INTAKE 2
Colour	black	
Efficiency	75 % A	
Capacity	2.7-8.3 kW	
Dimensions h / w / d	900 / 595 / 412 mm	
Order nr.	0434818600000	0434818001320



SKIVE II / II-C

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Paint options
- Closable air inlet
- Logs 50 cm

MODEL	SKIVE II	1	SKIVE II-C	2	SKIVE II-C	3	COVER CAP WHEN USING REAR FLUE
Colour	black		black / honey cake		black / ivory		Tile colour honey cake ivory
Efficiency	80 %	A	80 %	A	80 %	A	Order nr. 0434715015009 0434715035009
Capacity	4-12.3 kW		4-12.3 kW		4-12.3 kW		
Dimensions h / w / d	810 / 632 / 455 mm		835 / 851 / 455 mm		835 / 851 / 455 mm		
Order nr.	0434715650000		0434715610000		0434715630000		



4



1



2




3

TREVISO II

HIGHLIGHTS

 **Tertiary combustion**
double combustion saves the amount of fuel needed

 **Replaceable exchanger**
option of replacing the exchanger with a dummy plug

YOUR BENEFITS

• Paint options



**KNIE FOR REAR FLUE
BY TREVISO
WITHOUT EXCHANGER**

Order nr. 0332015007065

	MODEL	TREVISO II	1	TREVISO II	2	TREVISO II	3	TREVISO II	4
Colour		black / green tile		black / brown tile		black / honey cake		black / ivory	
Efficiency		82 %	A+	82 %	A+	82 %	A+	82 %	A+
Capacity		2.7-8.2 kW		2.7-8.2 kW		2.7-8.2 kW		2.7-8.2 kW	
Dimensions h / w / d		1,100 / 746 / 483 mm		1,100 / 746 / 483 mm		1,100 / 746 / 483 mm		1,100 / 746 / 483 mm	
Order nr.		0433900000000		0433900010000		0433900020000		0433900030000	



TREVISO II TILED LEDGE BASE

HIGHLIGHTS



Tertiary combustion

double combustion saves the amount of fuel needed



Replaceable exchanger

option of replacing the exchanger with a dummy plug



**KNIE FOR REAR FLUE
BY TREVISO
WITHOUT EXCHANGER**

Order nr. 0332015007065

MODEL	TREVISO II ¹	TREVISO II ²	TREVISO II ³	TREVISO II ⁴
Colour	black / green tile	black / brown tile	black / honey cake	black / ivory
Efficiency	82 % A+	82 % A+	82 % A+	82 % A+
Capacity	2.7-8.2 kW	2.7-8.2 kW	2.7-8.2 kW	2.7-8.2 kW
Dimensions h / w / d	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm
Order nr.	043392000000	0433920010000	0433920020000	0433920030000



UKA

HIGHLIGHTS



Easy control

Easy control air inlet regulation - easy air supply regulation control with just one regulator

YOUR BENEFITS

- Possibility to add a central air intake
- Cast iron door

MODEL	UKA ¹	CENTRAL AIR INTAKE ²	ADAPTOR 130/150
Colour	black		
Efficiency	75 % A		
Capacity	2-6.2 kW		
Dimensions h / w / d	625 / 460 / 401 mm		
Order nr.	043481510000	0434817001320	0434815005450



UMEA

HIGHLIGHTS



Tertiary combustion

double combustion saves the amount of fuel needed



Enamel technology

YOUR BENEFITS

· 2 hotplates

MODEL	UMEA
Colour	black / beige ceramics
Efficiency	79 % A
Capacity	2.3-7.1 kW
Dimensions h / w / d	705 / 620 / 410 mm
Order nr.	0470715020000



1



4



2



3

VAASA PLUS III, V

MODEL	VAASA PLUS III 1	VAASA PLUS III 2	VAASA PLUS V 3	VAASA PLUS V 4
Colour	anthracite / silver	anthracite / silver	anthracite / silver	anthracite / silver
Efficiency	79 % A	79 % A	79 % A	79 % A
Capacity	4.9-8.3 kW	4.9-8.3 kW	4.9-8.3 kW	4.9-8.3 kW
Dimensions h / w / d	1,095 / 560 / 378 mm	1,095 / 560 / 378 mm	876 / 560 / 378 mm	876 / 560 / 378 mm
Order nr.	0430815030000	0430815090000	0430815050000	0430815110000



PRODUCT HIGHLIGHTS

FIREPLACE STOVES WITH HEAT EXCHANGER



Smart heating with HAAS+SOHN


Use our fireplace stove for central heating and save the environment. The fireplace stove with exchanger combines the comfortable warm atmosphere of fireplace stoves with the efficiency of central heating. They intelligently utilise the overall energy, optimise the efficiency of the central heating system and prevent radiation losses. You can thus enjoy the crackling of fire from the fireplace stove, heat ecologically, and save heating costs with a clear conscience!


- ✚ self-sufficient, energy saving heating
- ✚ direct heating of the room
- ✚ and more than 70% of heat transferred to the heating system
- ✚ perfect heating alternative in the transitional period



Heat exchanger cleaning

Patented heat exchanger cleaning technology. A unique system of convenient cleaning of the exchanger, protected by the Industrial Property Office of the Czech Republic as a usable sample.

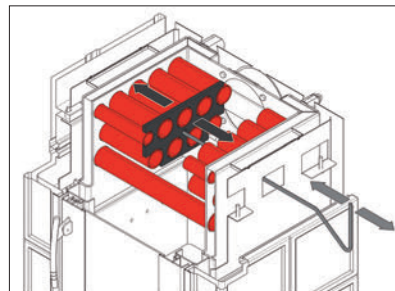

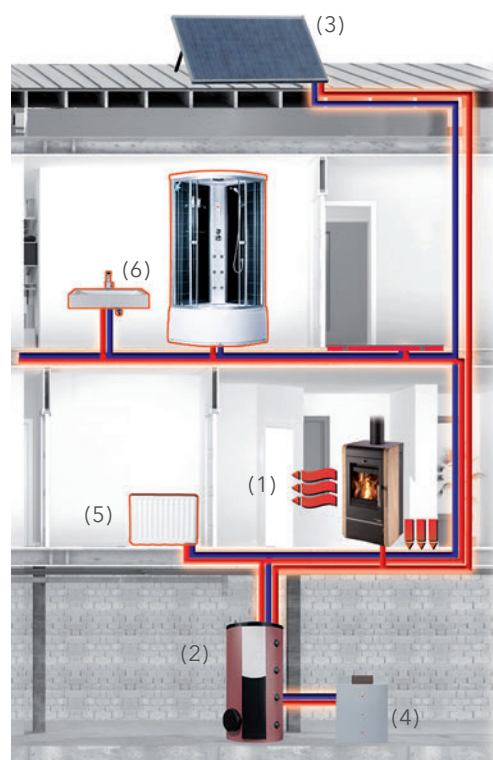

Some of the heat is directly utilised for heating the room in which the stove is located (1). The rest is stored in the accumulation reservoir (2), which can also be supplied from other energy sources, such as solar panels (3) and boilers (4). When needed, heat is transferred from the reservoir to the heating system (radiators) (5) or used, e.g., for heating water (6).

Warning:

The exchanger cannot be used without a hot-water connection. Connection to the heating system must be carried out by a professional company.



Automatic primary combustion air regulator

During a power outage, when water in the exchanger reaches 95 °C, this closes the primary air inlet into the firing chamber with the help of a special thermostatic capillary valve, which makes combustion impossible.



Replaceable exchanger

The heat exchanger can be added to stoves or removed and replaced with the dummy plug at any time. This feature is advantageous in cases when the stove is connected or disconnected from the heating system. Overall stove servicing is simplified due to this feature.



2



1

ADRIA II WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



Replaceable exchanger
option of replacing the exchanger with a dummy plug

YOUR BENEFITS

· Option to add a cooling loop

MODEL	ADRIA II ¹	ADRIA II ²	COOLING LOOP
Colour	black / beige ceramics	anthracite / fire door and sides silver	
Efficiency	83 % A+	83 % A+	
Cap. (for heat. elements)	3.3-10.3 kW (4.9 kW)	3.3-10.3 kW (4.9 kW)	
Dimensions h / w / d	1,050 / 560 / 442 mm	1,050 / 560 / 442 mm	
Order nr.	043101500000	043101501000	0436819005019



1



2

ALMO WITH HEAT EXCHANGER



HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Closable air inlet
- Option to add a cooling loop
- 3-point closing

	MODEL	ALMO ¹	ALMO ²	COOLING LOOP
Colour		anthracite	black	
Efficiency		81% A+	81% A+	
Cap. (for heat. elements)		3.3–10.2 kW (7.3 kW)	3.3–10.2 kW (7.3 kW)	
Dimensions h / w / d		983 / 486 / 566 mm	983 / 486 / 566 mm	
Order nr.		0434516040000	0434516020000	0434515006108



1



2

ALYTUS WITH HEAT EXCHANGER



HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Closable air inlet
- Option to add a cooling loop
- 3-point closing

MODEL	ALYTUS ¹	ALYTUS ²	COOLING LOOP
Colour	black / white tile	anthracite / havana tile	
Efficiency	81 % A+	81 % A+	
Cap. (for heat. elements)	3.3–10.2 kW (7.2 kW)	3.3–10.2 kW (7.2 kW)	
Dimensions h / w / d	962 / 524 / 566 mm	962 / 524 / 566 mm	
Order nr.	043451560000	043451570000	0434515006108



1



2

ANDRUS WITH HEAT EXCHANGER

HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



Heat exchanger cleaning
simple and clean



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Option to add a cooling loop
- Replaceable exchanger

MODEL	ANDRUS ¹	ANDRUS ²	COOLING LOOP
Colour	black / beige ceramics	anthracite / grey ceramics	
Efficiency	87 % A+	87 % A+	
Cap. (for heat. elements)	5-15.3 kW (11.1 kW)	5-15.3 kW (11.1 kW)	
Dimensions h / w / d	1,202 / 620 / 632 mm	1,202 / 620 / 632 mm	
Order nr.	043333700000	043333702000	0432317006108



ARKTIC 12 WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



Heat exchanger cleaning
simple and clean



Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Replaceable exchanger
- Option of side stoking
- Logs 50 cm

MODEL	ARKTIC 12	1	ARKTIC 12 + HOTPLATE	2
Colour	black		black	
Efficiency	82 %	A⁺	82 %	A
Cap. (for heat. elements)	4-12.5 kW (9.1 kW)		4-12.5 kW (9.1 kW)	
Dimensions h / w / d	827 / 649 / 549 mm		827 / 649 / 549 mm	
Order nr.	047061500000		047061505000	



AVESTA WITH HEAT EXCHANGER

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Option to add a cooling loop
- Closable air inlet
- 3-point closing

	MODEL	AVESTA	COOLING LOOP
Colour		black / Woodstone Prestige	
Efficiency		81 % 	
Cap. (for heat. elements)		3.3–10.2 kW (7.2 kW)	
Dimensions h / w / d		962 / 524 / 566 mm	
Order nr.		0434615600000	0434515006108



1



2

BORAS AL II WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion

double combustion saves the amount of fuel needed



Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

	MODEL	BORAS AL II ¹	BORAS AL II ²
Colour		black / beige ceramics	anthracite / silver door and cover
Efficiency		82 % A+	82 % A+
Cap. (for heat. elements)		3.3-10.5 kW (7.7 kW)	3.3-10.5 kW (7.7 kW)
Dimensions h / w / d		1,194 / 500 / 595 mm	1,194 / 500 / 595 mm
Order nr.		0432915300000	0432915200000



1



2



3



4

EBOLI AL II WITH HEAT EXCHANGER / COOLING LOOP



HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



External combustion air supply
ideal for low-energy houses



Heat exchanger cleaning
simple and clean



Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Cooling loop
- Paint options

COVER CAP

WHEN USING REAR FLUE

Tile colour brown tile
green tile
caramel tile
tabak tile

Order nr. 0332215006103
0332215016103
0332215046103
0332215066103





MODEL	EBOLI AL II 1	EBOLI AL II 2	EBOLI AL II 3	EBOLI AL II 4
Colour	black / brown tile	black / green tile	black / caramel tile	black / tabak tile
Efficiency	82 % A⁺	82 % A⁺	82 % A⁺	82 % A⁺
Cap. (for heat. elements)	4-12.2 kW (8.8 kW)	4-12.2 kW (8.8 kW)	4-12.2 kW (8.8 kW)	4-12.2 kW (8.8 kW)
Dimensions h / w / d	992 / 695 / 591 mm	992 / 695 / 591 mm	992 / 695 / 591 mm	992 / 695 / 591 mm
Order nr. (without cool. loop)	0332315600000	0332315610000	0332315640000	0332315660000
Order nr. (with cooling loop)	0332315700000	0332315710000	0332315740000	0332315760000



EMPOLI AL II WITH HEAT EXCHANGER / COOLING LOOP



HIGHLIGHTS

-  **Tertiary combustion**
double combustion saves the amount of fuel needed
-  **External combustion air supply**
ideal for low-energy houses
-  **Heat exchanger cleaning**
simple and clean
-  **Automatic primary combustion air regulator**
prevents problems during power outages

YOUR BENEFITS

- Cooling loop
- Paint options

COVER CAP WHEN USING REAR FLUE

Tile colour brown tile
green tile
bordeaux tile
caramel tile

Order nr. 0332215006103
0332215016103
0332215026103
0332215046103

MODEL	EMPOLI AL II 1	EMPOLI AL II 2	EMPOLI AL II 3	EMPOLI AL II 4
Colour	black / brown tile	black / green tile	black / bordeaux tile	black / caramel tile
Efficiency	82 % A⁺	82 % A⁺	82 % A⁺	82 % A⁺
Cap. (for heat. elements)	4-12.2 kW (8.8 kW)	4-12.2 kW (8.8 kW)	4-12.2 kW (8.8 kW)	4-12.2 kW (8.8 kW)
Dimensions h / w / d	992 / 695 / 591 mm	992 / 695 / 591 mm	992 / 695 / 591 mm	992 / 695 / 591 mm
Order nr. (without cool. loop)	0332315200000	0332315210000	0332315220000	0332315240000
Order nr. (with cooling loop)	0332315500000	0332315510000	0332315520000	0332315540000



GRAND MAX WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion

double combustion saves the amount of fuel needed

YOUR BENEFITS

- Replaceable exchanger

MODEL	GRAND MAX
Colour	black / beige ceramics
Efficiency	83 % A+
Cap. (for heat. elements)	4.3-13.7 kW (7.3 kW)
Dimensions h / w / d	1,231 / 646 / 472 mm
Order nr.	0464027110000



1



2

GRAND MAX PLUS II/11 WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Option to add a cooling loop
- Replaceable exchanger

	MODEL	GRAND MAX PLUS II/11 ¹	GRAND MAX PLUS II/11 ²	COOLING LOOP
Colour		black / beige ceramics	anthracite / grey ceramics	
Efficiency		84 % A+	84 % A+	
Cap. (for heat. elements)		3.5-15.2 kW (11.3 kW)	3.5-15.2 kW (11.3 kW)	
Dimensions h / w / d		1,231 / 646 / 626 mm	1,231 / 646 / 626 mm	
Order nr.		043311700000	043311701000	0431317006064



2




1


MANTOVA AL II WITH HEAT EXCHANGER




HIGHLIGHTS

 **Tertiary combustion**
double combustion saves the amount of fuel needed

 **External combustion air supply**
ideal for low-energy houses

 **Heat exchanger cleaning**
simple and clean

	MODEL	MANTOVA AL II ¹	MANTOVA AL II ²
	Colour	black / beige ceramics	anthracite / silver door
	Efficiency	82 % 	82 % 
	Cap. (for heat. elements)	3.3-10.5 kW (7.6 kW)	3.3-10.5 kW (7.6 kW)
	Dimensions h / w / d	962 / 506 / 595 mm	962 / 506 / 595 mm
	Order nr.	0433715150000	0433715100000



2



1

NIVALA WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



Heat exchanger cleaning
simple and clean



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Option to add a cooling loop
- Replaceable exchanger

MODEL	NIVALA ¹	NIVALA ²	COOLING LOOP
Colour	black / beige ceramics	anthracite / grey ceramics	
Efficiency	87 % A+	87 % A+	
Cap. (for heat. elements)	5-15.3 kW (11.1 kW)	5-15.3 kW (11.1 kW)	
Dimensions h / w / d	1,231 / 621 / 629 mm	1,231 / 621 / 629 mm	
Order nr.	043233700000	0432337010000	0432317006108



SAVONA WITH HEAT EXCHANGER

HIGHLIGHTS



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

double combustion saves the amount of fuel needed



Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

YOUR BENEFITS

- Closable air inlet
- Option to add a cooling loop
- 3-point closing

MODEL	SAVONA ¹	SAVONA ²	SAVONA ³	COOLING LOOP
Colour	anthracite / chocolate brown	black / white tile	black / stainless steel tile	
Efficiency	81 % A+	81 % A+	81 % A+	
Cap. (for heat. elements)	3.3–10.2 kW (7.2 kW)	3.3–10.2 kW (7.2 kW)	3.3–10.2 kW (7.2 kW)	
Dimensions h / w / d	962 / 524 / 566 mm	962 / 524 / 566 mm	962 / 524 / 566 mm	
Order nr.	0434615400000	0434615500000	0434615510000	0434515006108



TREVISO II WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion
double combustion saves the amount of fuel needed



Replaceable exchanger
option of replacing the exchanger with a dummy plug

YOUR BENEFITS

- Option to add a cooling loop
- Paint options

COOLING LOOP

Order nr. 0332015005029

	MODEL TREVISO II ¹	TREVISO II ²	TREVISO II ³	TREVISO II ⁴
Colour	black / green tile	black / brown tile	black / honey cake	black / ivory
Efficiency	82 % A	82 % A	82 % A	82 % A
Cap. (for heat. elements)	2.7-8.2 kW (5 kW)	2.7-8.2 kW (5 kW)	2.7-8.2 kW (5 kW)	2.7-8.2 kW (5 kW)
Dimensions h / w / d	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm
Order nr.	043391000000	0433910010000	0433910020000	0433910030000




TREVISO II WITH HEAT EXCHANGER, TILED PEDESTAL



HIGHLIGHTS

 **Tertiary combustion**
double combustion saves the amount of fuel needed

 **Replaceable exchanger**
option of replacing the exchanger with a dummy plug

YOUR BENEFITS

· Option to add
a cooling loop

COOLING LOOP

Order nr. 0332015005029

	MODEL	TREVISO II ¹	TREVISO II ²	TREVISO II ³	TREVISO II ⁴
Colour		black / green tile	black / brown tile	black / honey cake	black / ivory
Efficiency		82 % A	82 % A	82 % A	82 % A
Cap. (for heat. elements)		2.7-8.2 kW (5 kW)	2.7-8.2 kW (5 kW)	2.7-8.2 kW (5 kW)	2.7-8.2 kW (5 kW)
Dimensions h / w / d		1,100 / 746 / 483 mm	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm	1,100 / 746 / 483 mm
Order nr.		0433930000000	0433930010000	0433930020000	0433930030000

ELBOWS AND SOCKETS FOR FIREPLACE STOVE - SHEET METAL THICKNESS 1.5 MM



GAS PIPE	Ø 120 mm	Ø 120 mm	Ø 120 mm	Ø 160 mm	Ø 180 mm
Lenght	250 mm	500 mm	1000 mm	250 mm	250 mm
Order nr. - anthracite	1101122520000	1101125020000	1101129920000	-	-
Order nr. - black	-	-	-	1101162510000	110118251000



GAS PIPE	Ø 130 mm	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm	Ø 150 mm
Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
Order nr. - anthracite	1101132520000	1101135020000	1101139920000	1101152520000	1101155020000	1101159920000
Order nr. - black	1101132510000	1101135010000	1101139910000	1101152510000	1101155010000	1101159910000



GAS PIPE WITH BUTTERFLY VALVE	Ø 130 mm	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm	Ø 150 mm
Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
Order nr. - anthracite	1101132620000	1101135120000	1101139820000	1101152620000	1101155120000	1101159820000
Order nr. - black	1101132610000	1101135110000	1101139810000	1101152610000	1101155110000	1101159810000

GAS PIPE WITH CLEANING APERTURE	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm
Lenght	500 mm	1000 mm	500 mm	1000 mm
Order nr. - anthracite	1101135220000	1101139720000	1101155220000	110115972000
Order nr. - black	1101135210000	1101139710000	1101155210000	110115971000

ELBOWS AND SOCKETS FOR FIREPLACE STOVE - SHEET METAL THICKNESS 1.5 MM



GAS ELBOW	Ø 120 mm	Ø 130 mm	Ø 150 mm	Ø 160 mm	Ø 180 mm
Order nr. - anthracite	1103129010000	1103139020000	1103159020000	-	-
Order nr. - black	-	1103139010000	1103159010000	1103169010000	1103189010000



TWO PIECE FLUE COLLAR	Ø 120 mm	Ø 130 mm	Ø 150 mm	Ø 160 mm	Ø 180 mm
Order nr. - anthracite	1105120120000	1105130120000	1105150120000	-	-
Order nr. - black	-	1105130110000	1105150110000	1105160110000	1105180110000



GAS ELBOW WITH CLEANING APERTURE	Ø 130 mm	Ø 150 mm
Order nr. - anthracite	1103139120000	1103159120000
Order nr. - black	1103139110000	1103159110000



GAS ELBOW 45°	Ø 130 mm	Ø 150 mm
Order nr. - anthracite	1103134520000	1103154520000
Order nr. - black	1103134510000	1103154510000

ADJUSTABLE ELBOWS








Order nr.	Ø 150 mm	Ø 160 mm	Ø 180 mm
UNI adjust. elbow, cleaning hole 180/0-180°, 5 segments (1.5)			1101191800000
Adjustable elbow 180/0-90° (1.5)			1101191810000
Adjustable elbow 180/0-45° (1.5)			1101191820000



UNI adjust. elbow, cleaning hole 160/0-180°, 5 segments (1.5)		1101191600000	
Adjustable elbow 160/0-90° (1.5)		1101191610000	
Adjustable elbow 160/0-45° (1.5)		1101191620000	
UNI adjust. elbow, cleaning hole 150/0-180°, 5 segments (1.5)	1101191500000		
Adjustable elbow 150/0-90° (1.5)	1101191510000		
Adjustable elbow 150/0-45° (1.5)	1101191520000		

					
HEAT EXCHANGERS	AMADORA	ANDRUS FARUM	NIVALA	NOVARA	ARKTIC 12
Order nr.	0671015005010	0432317006101	0432317001105	0618018073200	0470615116010

					
HEAT EXCHANGERS	GRAND MAX PLUS 11 KALMAR 11	GRAND MAX ADRIA MAX GRAND MAX LUX	TREVISO	VESTRE MARMA ADRIA II	VESUVIO II 13kW/1S, 15kW/2S
Order nr.	0431317006000	0464027107000	0332015006100	0426837117000	0619018206050 0619018156050

					
CAPS	ANDRUS FARUM	NIVALA	ARKTIC 12	GRAND MAX PLUS 11 KALMAR 11 (with stone)	GRAND MAX ADRIA MAX GRAND MAX LUX
Order nr.	0432317005700	0432317006700	0470615106010	0431317015700	0464017116004

			
CAPS	TREVISO	TREVISO II	VESTRE MARMA ADRIA II
Order nr.	0332015105000	0433900005000	0426817106011

					
COOLING LOOP	ANDRUS FARUM NIVALA	GRAND MAX PLUS KALMAR	ADRIA II MARMA VESTRE BERGAMO	TREVISO TREVISO II	ALMO ALYTUS AVESTA SAVONA VISBY
Order nr.	0432317006108	0431317006064	0436819005019	0332015005029	0434515006108



QUALITY TIMES

"Technology? Yes, Yes, Yes! It fascinated me already in childhood. If I can improve something, I meticulously go at it. I do not know how to improve only one thing: my pellet stove from HAAS+SOHN. I saw it, fell in love and purchased it."



PELLET STOVES



New generation heating

The pellet stove with WLAN function provides maximum freedom thanks to remote control accessible from any point worldwide - absolutely independent of the location. And besides the comfort of pellet stoves, they also afford a romantic view of the flames almost like it applies to the fireplace stoves - only at HAAS+SOHN.

- + easy operation
- + highest operating comfort
- + fully automatic heat regulation
- + energy efficient heating
- + almost noise-free operation
- + suitable for allergic persons
- + easy cleaning





PRODUCT HIGHLIGHTS PELLET STOVES



Pellet stove with WLAN module New generation heating

For greater mobility and freedom. So your home is always warm - regardless of your current location. You equip your pellet stove with a multifunctional WLAN module from HAAS+SOHN and use 2 types of remote control devices. You either control your pellet stove via a smartphone using the "Local" function, i.e. in and around your home, or "Global", i.e. from any location worldwide. The module does not need any additional network connection.

Simply connect it to the pellet stove and its ready! HAAS+SOHN so simply and comfortably takes care of Your

QUALITY TIMES

HAAS+SOHN application Complete control via a smartphone

Simply download the application free-of-charge and you can go ahead! Full control of your pellet stove is possible easily and simply with the HAAS+SOHN application.

- + Easy setting of the weekly program via a smartphone
- + Via this application, up to 5 members of the family can connect to one or more pellet stoves and simultaneously control up to 5 pellet stoves
- + Push-notification - your pellet stove communicates with you via the smartphone even when it is not active. It informs you about cleaning and failures.
- + SL data security offers everything you need for secure communication





Large glazed area

The view of the flames is almost identical to that of classic wood, thus bringing about a pleasant feeling of comfort.



Friendly for allergy sufferer thanks to the heat exchanger

Enjoy the radiation of natural heat and its flow completely without an air fan in the room. Rising of dust and other particles is controlled, the air quality is maintained, the eyes and respiratory system are protected.



Simple operation

Comfortable and simple control with just four pushbuttons. Display with a well-arranged menu.



Fully automatic temperature control

Variable setting of the required room temperature at various time intervals eliminates frequent turning on and off of stoves. Thus, you reduce heating costs, protect the environment, reduce fouling and the need for cleaning.



1



2



3

HSP 1.17 II

HIGHLIGHTS



WLAN
optional feature Wlan Local



Fully automatic temperature control
the optimum room temperature exactly when you need it



Extremely quiet operation
almost noiseless



Large glazed area

YOUR BENEFITS

- External combustion air supply
- Simple operation
- ECO-Mode
- Safety functions

MODEL	HSP 1.17 II 1	WLAN MODULE 2	ROOM TEMPERATURE SENSOR 3
Colour	cast grey / black		
Efficiency	94 % A+		
Capacity	2.4-8.6 kW		
Dimensions h / w / d	963 / 522 / 524 mm		cable 8 m
Order nr.	0571207510000	0532007100000	0532007010000



2



1



3



4

HSP 7

HIGHLIGHTS



WLAN

optional feature Wlan Local & Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Extremely quiet operation

almost noiseless



Large glazed area

YOUR BENEFITS

- External combustion air supply
- Cast iron door
- Simple operation
- Weekly programming
- ECO-Mode

MODEL	HSP 7 1	HSP 7 2	WLAN MODULE 3	ROOM TEMPERATURE SENSOR 4
Colour	black	grey/black		
Efficiency	94 % A+	94 % A+		
Capacity	2.4-8.2 kW	2.4-8.2 kW		
Dimensions h / w / d	1,051 / 494 / 494 mm	1,051 / 494 / 494 mm		cable 8 m
Order nr.	0545008110000	0545008100000	0532007100000	0532007010000



1



2



3

HSP 6 TOLEDO IV 32

HIGHLIGHTS



WLAN

optional feature Wlan Local & Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Extremely quiet operation

almost noiseless



Large glazed area

YOUR BENEFITS

- External combustion air supply
- Fuel quality recognition
- Simple operation
- Weekly programming
- ECO-Mode
- Safety functions

MODEL	TOLEDO IV 32 1	WLAN MODULE 2	ROOM TEMPERATURE SENSOR 3
Colour	anthracite / grey		
Efficiency	95 % A+		
Capacity	2.4-8.3 kW		
Dimensions h / w / d	1,201 / 544 / 499 mm		cable 8 m
Order nr.	0543408670000	0532007100000	0532007010000



HSP 6 TOLEDO III 32-C

HIGHLIGHTS



WLAN

optional feature Wlan Local & Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Extremely quiet operation

almost noiseless



Large glazed area

YOUR BENEFITS

- External combustion air supply
- Fuel quality recognition
- Simple operation
- Weekly programming
- ECO-Mode
- Safety functions

MODEL	TOLEDO III 32-C 1	WLAN MODULE 2	ROOM TEMPERATURE SENSOR 3
Colour	anthracite / ahorn		
Efficiency	95 % A+		
Capacity	2.4-8.3 kW		
Dimensions h / w / d	1,193 / 533 / 498 mm		cable 8 m
Order nr.	0543408620000	0532007100000	0532007010000

QUALITY TIMES

"My life is a journey of discovery! Always new ideas, new people, new themes. This keeps me fresh. But I also like old things, such as a fire in a stove. Although the fire in the new and unique stove kit from HAAS+SOHN is better!"



FIREPLACE SETS



Individually designed home

The colour of our stove kit can be individually modified to suit the living room. The accumulation concrete allows long-lasting release of accumulated heat. For safe installation on a combustible or statically sensitive wall, it is possible to additionally use fire protection. Anyone can easily do the assembly within a short time!

- + long-lasting release of heat thanks to the accumulation concrete
- + pleasant radiation of heat in large areas
- + option of individual colour finish
- + additional possibility to acquire fire protection
- + easy cleaning



ASSEMBLY MANUAL OF THE STOVE KIT



- + Easy assembly permissible for all without professional knowledge.
- + The included assembly manual describes everything in detail, step-by-step.
- + The package includes the necessary material (for ASCIM also acrylic).
- + No special tools are required; you will use only standard tools.
- + Option of individual colour finish.
You can finish the accumulation concrete in a colour of your choice (the paint is not included in the package; you can only use mineral based paint).



Wrapping method

It is so simple:



Determine the location and sketch the layout



Mount the fire protection (special accessories)



Set up the fireplace hearth lining using the water level



Mount individual pieces one by one on each other following the instructions, and fix them with the acrylic adhesive




Paint the structure as you wish




ADONIS II, INSERT JONAVA IV

HIGHLIGHTS

 **External combustion air supply**
ideal for low-energy houses

YOUR BENEFITS

- Heat accumulation
- Paint options
- Enamel technology

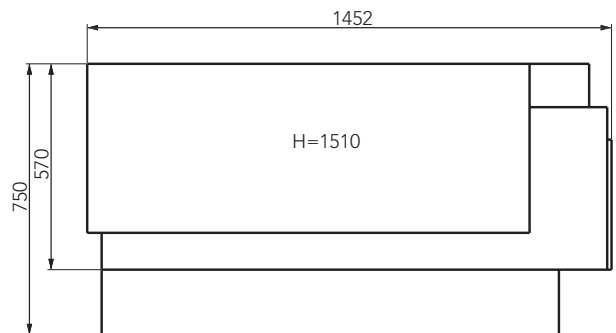

MODEL ADONIS II

Efficiency	82 %	A+
Capacity	2.9-9.2 kW	
Dimensions h / w / d	1,510 / 1,452 / 750 mm	
Order nr.	0601800620000	

FIRE FIGHTING PROTECTION

Order nr. 0648000500000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

WOOD BOX

Order nr. 0658000500000

Option of adding a wood bin.


Recommended chimney flue connection: min. 1,210 mm, chimney flue diameter 180 mm.

Delivery on 2 pallets (9 parts + hearth lining).




ARLBERG, INSERT JONAVA IV

HIGHLIGHTS


 External combustion air supply
ideal for low-energy houses

YOUR BENEFITS

- Heat accumulation
- Paint options
- Enamel technology

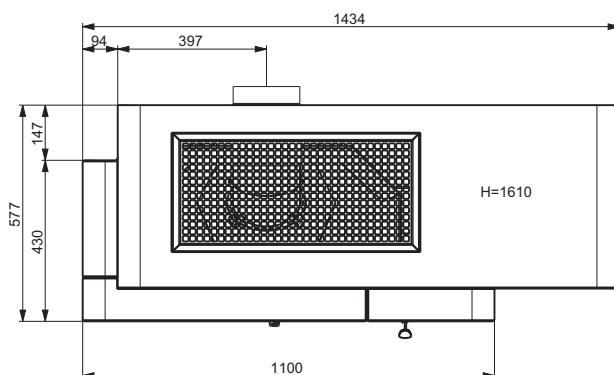

MODEL ARLBERG

Efficiency	82 %	
Capacity	2.9–9.2 kW	
Dimensions h / w / d	1,610 / 1,434 / 582 mm	
Order nr.	0601800850000	

FIRE FIGHTING PROTECTION

Order nr. 0648000500000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

VENTILATION GRILLE USING UPPER OUTLET

Order nr. 0655800800000

Possibility for additional installation of a ventilation grille.

Recommended chimney flue connection: min. 1,310 mm, chimney flue diameter 180 mm.

Delivery on 2 pallets (9 parts + hearth lining).



ASCIM II, INSERT MALVIK IV


HIGHLIGHTS



External combustion air supply
ideal for low-energy houses

YOUR BENEFITS

- Heat accumulation
- Paint options

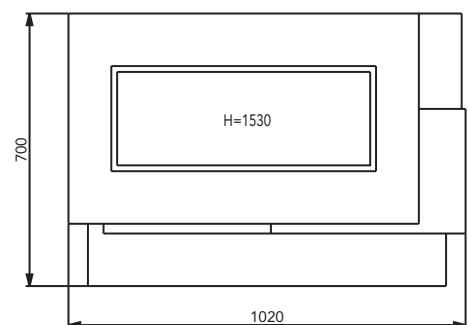

MODEL	ASCIM II
Efficiency	80 % A+
Capacity	2.4-7.5 kW
Dimensions h / w / d	1,530 / 1,020 / 700 mm
Order nr.	0601851120000

FIRE FIGHTING PROTECTION

Order nr. 0641851000000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.


Recommended chimney flue connection: min. 1,230 mm, chimney flue diameter 160 mm.

Delivery on 2 pallets (8 parts + hearth lining).




DACHSTEIN, INSERT MALVIK IV

HIGHLIGHTS


 **External combustion air supply**
ideal for low-energy houses

YOUR BENEFITS

- Heat accumulation
- Paint options
- Slim design

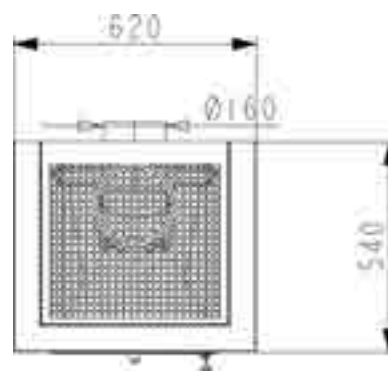

Option for top or rear flue connection

MODEL	DACHSTEIN	FIRE FIGHTING PROTECTION
Efficiency	80 % 	Order nr. 064185010000
Capacity	2.4-7.5 kW	
Dimensions h / w / d	1,631 / 620 / 540 mm	
Order nr.	0601852510000	

Recommended chimney flue connection:
min. 1,290 mm,
chimney flue diameter
160 mm.

Delivery on 2 pallets
(9 parts + hearth lining).



2



1

GENF II, INSERT JONAVA IV


HIGHLIGHTS



External combustion air supply
ideal for low-energy houses

YOUR BENEFITS

- Heat accumulation
- Paint options
- Enamel technology

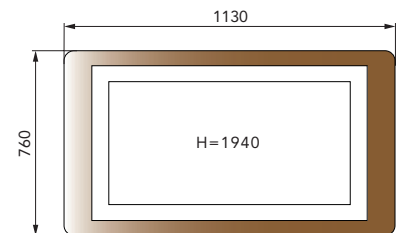

MODEL	GENF II	GENF II
Colour	Genf Rainbow	Genf Ruivona
Efficiency	82 % A⁺	82 % A⁺
Capacity	2.9-9.2 kW	2.9-9.2 kW
Dimensions h / w / d	1,940 / 1,130 / 760 mm	1,940 / 1,130 / 760 mm
Order nr.	0601801430000	0601801440000

FIRE FIGHTING PROTECTION

Order nr. 0641800400000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection: min. 1,550 mm, chimney flue diameter 180 mm.

Delivery on 2 pallets (13 parts + hearth lining).



PINUS II, INSERT PINUS AL

HIGHLIGHTS




External combustion air supply
ideal for low-energy houses



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

- Heat accumulation
- Enamel technology
- Paint options
- 3-point closing

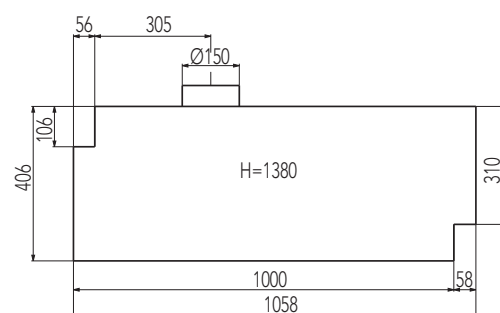

MODEL PINUS II

Efficiency	81 %	A+
Capacity	3.1–8.8 kW	
Dimensions h / w / d	1,380 / 1,058 / 406 mm	
Order nr.	0601871010000	

Recommended chimney flue connection:
min. 1,170 mm,
chimney flue diameter
150 mm.

Delivery on 2 pallets
(9 parts + hearth lining).



PINUS II CORNER, INSERT PINUS AL

HIGHLIGHTS




External combustion air supply
ideal for low-energy houses



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

- Heat accumulation
- Corner version
- Paint options
- 3-point closing

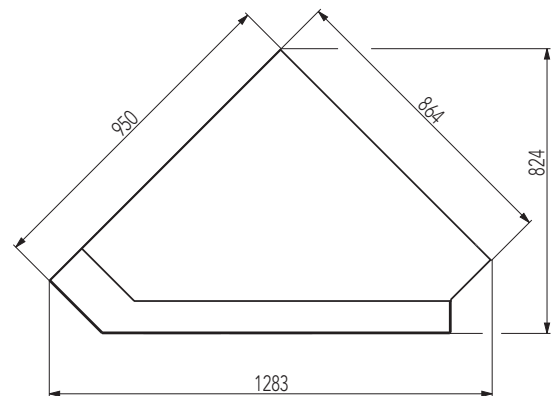

MODEL PINUS II CORNER

Efficiency	81 %	A+
Capacity	3.1-8.8 kW	
Dimensions h / w / d	1,440 / 1,283 / 824 mm	
Order nr.	0601871100000	

SET TO UPPER FLUE PIPE

Order nr. 0655870100000

Possibility to order a set to the upper flue pipe.

Recommended chimney flue connection: min. 1,170 mm, chimney flue diameter 150 mm.

Delivery on 2 pallets (9 parts + hearth lining).

FIREPLACE INSERTS



Individually designed home

The HAAS+SOHN fireplace inserts are the basis for your individual fireplace. Thanks to selection from various dimensions and shapes, there is no limit to your desires and ideas. The actual flue pipe can be in the rear or at the top meet your requirements.

- + long service life thanks to the high-quality Chamotte bricks
- + top quality and faultless operation
- + best functionality thanks to advanced technology
- + models equipped with external air intake, which saves you costs
- + adjustable legs, which adapt to every floor
- + easy and convenient cleaning thanks to an integrated ash-pan
- + large glazing with permanent glass wash for a clear view of the fire
- + new, air-cooled handle





1

JONAVA IV

HIGHLIGHTS



External combustion air supply
ideal for low-energy houses

YOUR BENEFITS





- Enamel technology






2



3

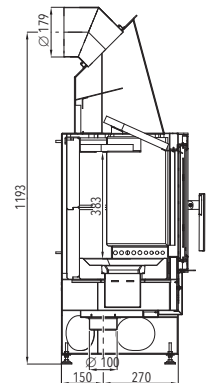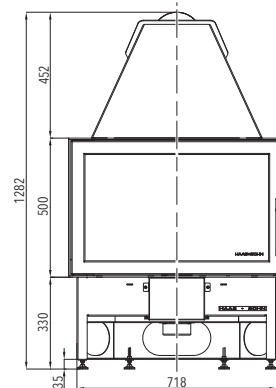


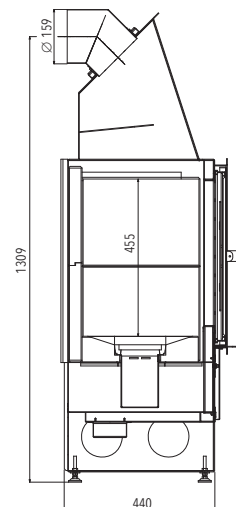
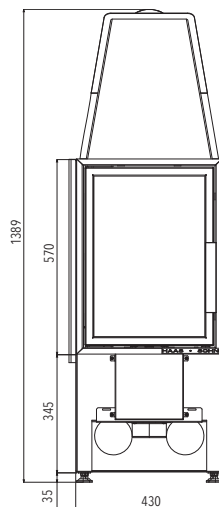
MODEL	JONAVA IV	1	WALL FRAME	2	WALL FRAME	3
Colour	black, enamel door		black sheet metal		enamel	
Efficiency	82 %	A+				
Capacity	2.9-9.2 kW					
Dimensions h / w / d	1,282 / 781 / 420 mm					
Order nr.	061801850000		0618018100073		0618018110073	

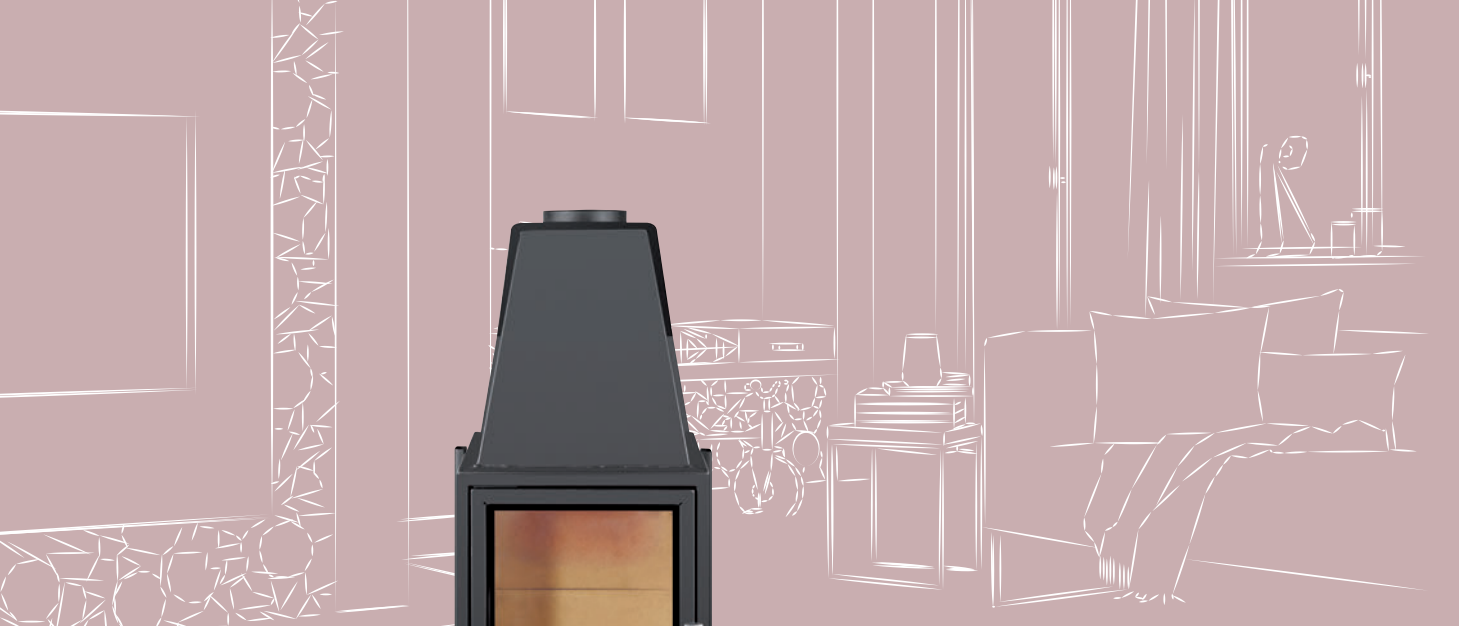



MALVIK IV

HIGHLIGHTS

 **External combustion air supply**
ideal for low-energy houses



MODEL	MALVIK IV
Colour	black
Efficiency	80 % 
Capacity	2.4-7.5 kW
Dimensions h / w / d	1,389 / 430 / 440 mm
Order nr.	0618516570000

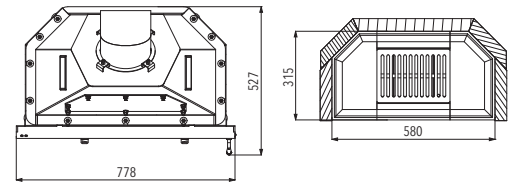

NOVARA

HIGHLIGHTS




External combustion air supply
ideal for low-energy houses



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

- Reflective glass
- Double glazing
- Replaceable exchanger

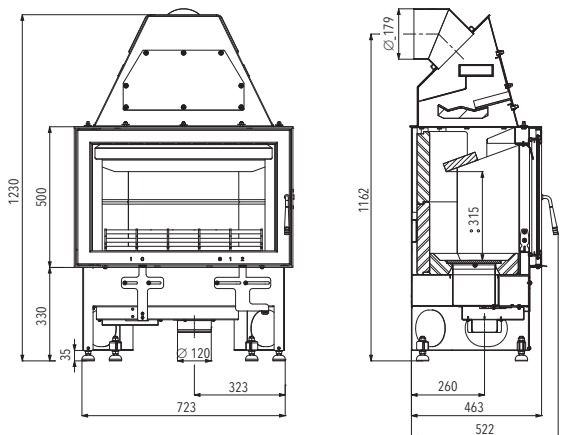

MODEL NOVARA

Colour anthracite

Efficiency 89 % **A+**

Capacity 4-12.7 kW

Dimensions h / w / d 1,230 / 778 / 527 mm

Order nr. 0618018070000



PINUS AL II

HIGHLIGHTS




External combustion air supply
ideal for low-energy houses



Tertiary combustion
double combustion saves the amount of fuel needed

YOUR BENEFITS

- 3-point closing
- Enamel technology

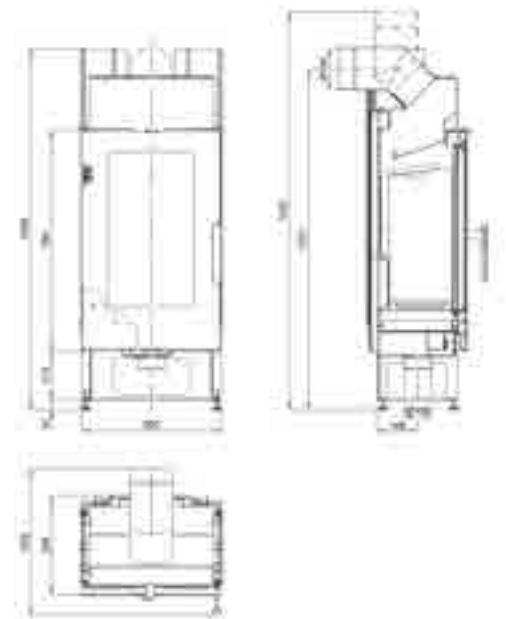

MODEL	PINUS AL II
Colour	black
Efficiency	80 % A+
Capacity	3.1-8.8 kW
Dimensions h / w / d	1,299 / 500 / 358 mm
Order nr.	0421817850000



FIREPLACE INSERTS WITH HEAT EXCHANGER



Use our fireplace insert for central heating and save the environment. Fireplace inserts with exchanger combine the comfortable warm atmosphere of the fireplace inserts with the efficiency of central heating. They intelligently utilise the overall energy, optimise the efficiency of the central heating system and prevent radiation loss. You can thus enjoy the crackling of fire from the stove according to your likes, heat ecologically, and save heating costs with a clear conscience!

- ✚ self-sufficient, energy saving heating
- ✚ direct heating of the room
- ✚ and more than 68 % of heat transferred to the heating system
- ✚ perfect heating alternative in the transitional period
- ✚ convenient and comfortable cleaning of the exchanger



Heat exchanger cleaning

Patented heat exchanger cleaning technology. A unique system of convenient cleaning of the exchanger, protected by the Industrial Property Office of the Czech Republic as a usable sample.



Reflective glass

Special reflective glass with a reflective layer reflects back into the hearth heat which would otherwise heat up normal glass to a much higher temperature.



Cooling loop – protection against the exchanger overheating

This serves as the protection against overheating if a power outage occurs.




Automatic primary combustion air regulator

During a power outage, when water in the exchanger reaches 95 °C, this closes the primary air inlet into the firing chamber with the help of a special thermostatic capillary valve, which makes combustion impossible.

CONNECTION DIAGRAM WHEN USING UPS

Informative diagram of the heating system.

Overheating protection during electrical power failure by using an uninterruptible power supply (UPS).

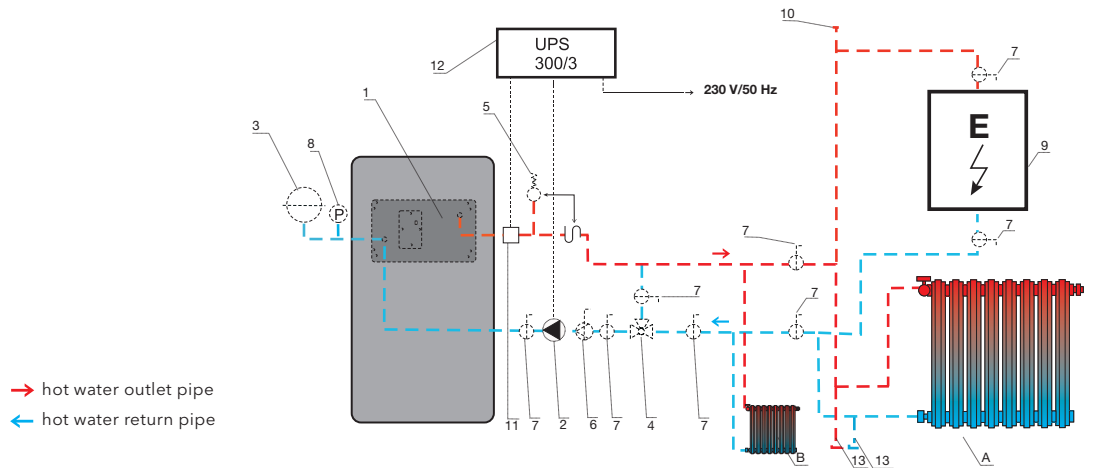


LEGEND:

- | | | |
|---|------------------------|---|
| 1. fireplace stoves with exchanger | 6. closing filter | 11. attached thermostat |
| 2. circulation pump | 7. ball shut-off valve | 12. backup power supply |
| 3. expansion tank | 8. pressure gauge | 13. release vent |
| 4. thermo-regulation valve, e.g. ESBE TV 25 (60-75°C) | 9. electric boiler | A. connection to the entire heating system |
| 5. pressure relief valve | 10. ventilation valve | B. connection to part of the heating system |

DIAGRAM OF CONNECTION WITH COOLING LOOP

Informative diagram of connection of the exchanger with the cooling loop to the hot-water exchanger, against overheating in the event of an electrical power outage.

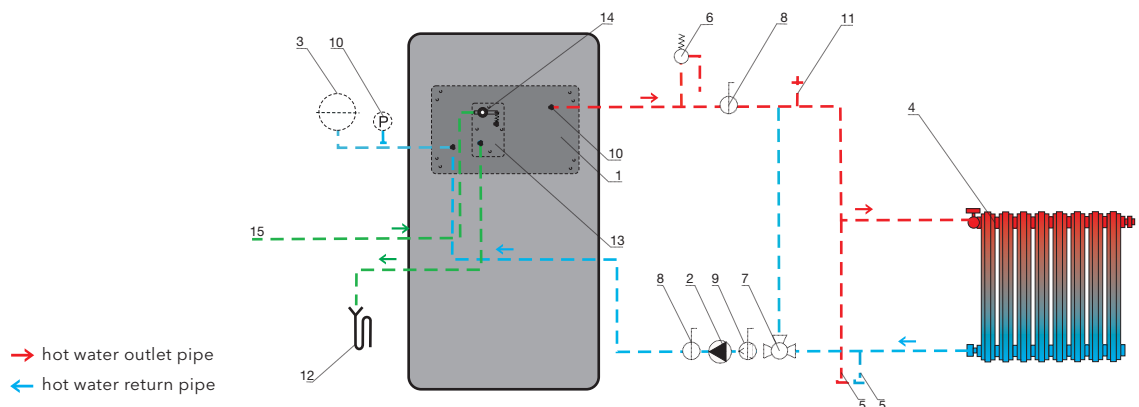

LEGEND:

- | | | |
|---------------------|---|----------------------------------|
| 1. exchanger | 6. pressure relief valve | 11. ventilation valve |
| 2. circulation pump | 7. thermo-regulation valve, e.g. ESBE TV 25 (60-75°C) | 12. waste |
| 3. expansion tank | 8. ball shut-off valve | 13. cooling exchanger (loop) |
| 4. radiator | 9. BALL closing filter | 14. relief heat valve |
| 5. release vent | 10. pressure gauge | 15. connected to cold water line |





1



2



3

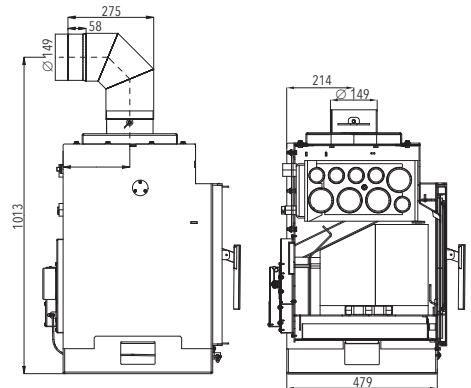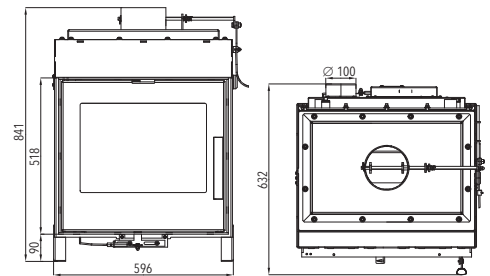

AMADORA WITH HEAT EXCHANGER



HIGHLIGHTS

EXTRA AIR Tertiary combustion
double comb. saves the amount of fuel needed



+ External combustion air supply
ideal for low-energy houses

STOP AIR P Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Replaceable exchanger
- Enamel technology
- Easy cleaning of the heat exchanger

	MODEL	AMADORA	1	AMADORA	2	AMADORA	3
Colour		anthracite, enamel door		anthracite, enamel door small straight frame		anthracite, enamel door big straight frame	
Efficiency		83 %	A+	83 %	A+	83 %	A+
Cap. (for heat. elements)		2.7-8.3 kW (6 kW)		2.7-8.3 kW (6 kW)		2.7-8.3 kW (6 kW)	
Dimensions h / w / d		841 / 596 / 632 mm					
Order nr.		067101500000		067101510000		067101530000	

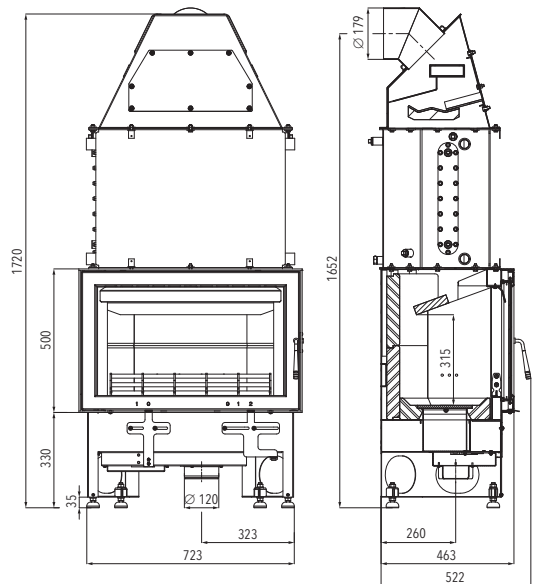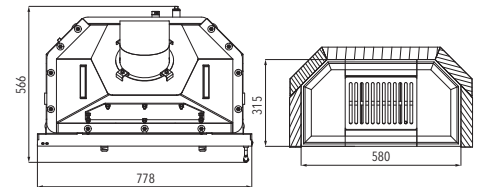

NOVARA 17 WITH HEAT EXCHANGER



HIGHLIGHTS



Tertiary combustion
double comb. saves the amount of fuel needed



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages

YOUR BENEFITS

- Replaceable exchanger
- Built-in cooling loop
- Reflective glass
- Double glazing

MODEL NOVARA 17

Colour anthracite

Efficiency 90 % **A+**

Cap. (for heat. elements) 5.1-17.4 kW (10.8 kW)

Dimensions h / w / d 1,720 / 778 / 566 mm


Order nr. 0618018170000





VESUVIO II WITH HEAT EXCHANGER

HIGHLIGHTS

 **Tertiary combustion**
double comb. saves the amount of fuel needed

 **External combustion air supply**
ideal for low-energy houses

 **Heat exchanger cleaning**
simple and clean

 **Easy control**
Easy control air inlet regulation – easy air supply regulation control with just one regulator

YOUR BENEFITS









- Option to add a cooling loop
- Replaceable exchanger
- Closable air inlet
- Aut. primary combustion air regulator
- Double glazing

COOLING LOOP


Order nr. 0619018156017

ASSEMBLY PARTS KIT VESUVIO II

Order nr. 0619018151300

MODEL	VESUVIO II/10/1S  WITH HEAT EXCHANGER	VESUVIO II/12/2S  WITH HEAT EXCHANGER	VESUVIO II/13/1S  WITH HEAT EXCHANGER	VESUVIO II/15/2S  WITH HEAT EXCHANGER
Colour	black / cast iron door	black / glass print	black / cast iron door	black / glass print
Efficiency	81 % 	82 % 	83 % 	80 % 
Rated power (for heat. elements)	15.6 kW (10 kW)	15.7 kW (12.2 kW)	20.2 kW (12.6 kW)	20.1 kW (14.7 kW)
Dimensions (max.)	1,227 (1,266) / 800 / 594 mm	1,227 (1,266) / 800 / 594 mm	1,309 (1,348) / 800 / 594 mm	1,309 (1,348) / 800 / 594 mm
Order nr.	0619018150000	0619018151000	0619018200000	0619018210000

ACCESSORIES

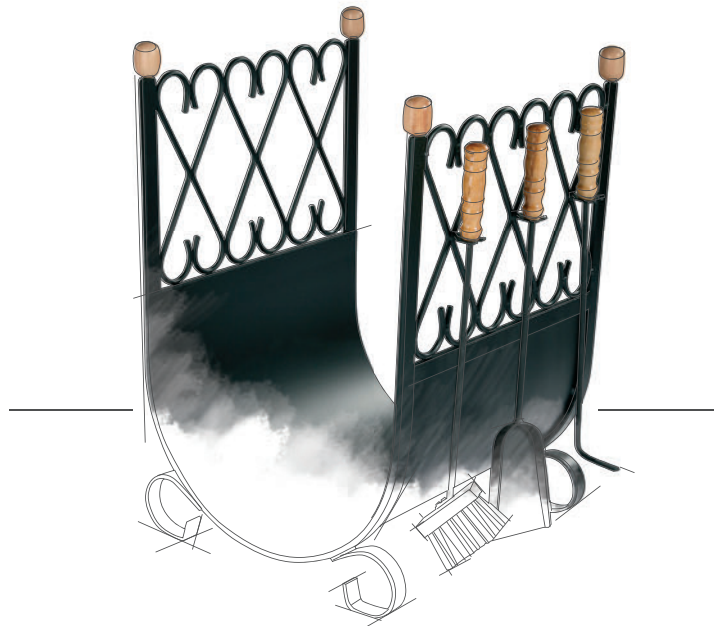

The fireplace stove or fireplace essentially need accessories that combine your interior with a design element and also provide a practical tool for maintaining your heater.

- + visual improvement of your stove
- + patented technology of air draft for higher energy saving
- + practical and simultaneously a design element for your home

FIREPLACE TOOLS



FIREPLACE TOOLS

Dimensions

Colour

Order nr.

BAU IV - THREE-PIECE

58 x 20 x 20 cm

black, wood

1116002200000



HS III - THREE-PIECE

76.5 x 22 x 22 cm

anthracite,
chromium-coated handle

1130140140000

CLEANING SPRAYS



GLASS CLEANER

Volume

Order nr.

500 ml

1116000200000

LOG BASKETS



LOG BASKETS

Dimensions

Colour

Order nr.

ANGULAR LITTER BIN

35 x 46 x 30 cm

black

1116002700000



MIDDLE BASKET

40 x 24 x 36 cm

black, wood

1116002500000



OVAL BASKET

46 x 22 x 32 cm

black, wood

1116002400000



BASKET BIG (WITHOUT / WITH INSTRUMENTS)

68 x 48 x 45 /
70 x 49 x 46 cm

black, wood

1116002600000 /
1116001600000



BASKET DERBY (WITH INSTRUMENTS)

68 x 48 x 45 cm

anthracite, wood

1116003000000

ENERGY SAVING-DRAUGHT CONTROLLERS

Zugex H+S
chimney draught
regulator



Zugregler H+S
chimney draught
regulator



CONTROLLER

ZUGEX H+S 130

Order nr.

1120130110000

ZUGEX H+S 150

Order nr.

1120150110000

ZUGEX H+S 200

Order nr.

1120200110000

CONTROLLER

ZUGREGLER H+S 130

Order nr.

1120130010000

ZUGREGLER H+S 150

Order nr.

1120150010000

ZUGREGLER H+S 200

Order nr.

1120200010000

REPAIRING SPRAYS



REPAIRING
SPRAY

Volume

Order nr.

COLOUR
BLACK

400 ml

0070200050005

COLOUR
ANTHRACITE

400 ml

0070200020005

REPAIRING
SPRAY

Volume


Order nr.

COLOUR
SILVER

400 ml


0070200040005

FIREPLACE STOVE GLASS FLOOR PLATES MADE OF 6 MM THICK HARDENED GLASS

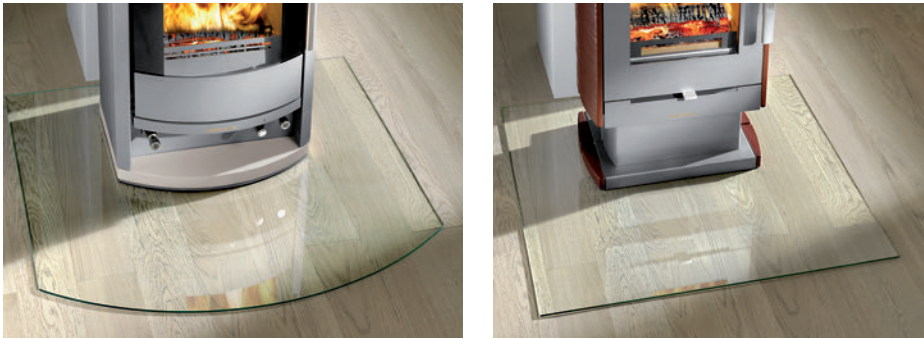

Elegant and safe


- + visual enhancement of your stove
- + floor surface protection
- + 6 mm thick hardened glass with polished edge
- + fire protection of flammable floors (e.g. wooden floors)



**GLASS FLOOR PLATES
- FORM "A"**

Dimensions 900 x 750 mm


Order nr. 1115409200000



**GLASS FLOOR PLATES
- FORM "A"**

Dimensions 1,000 x 1,000 mm


Order nr. 1115410200000



**GLASS FLOOR PLATES
- FORM "B"**

Dimensions 1,000 x 1,000 mm /
580 mm 45°


Order nr. 1115510200000



**GLASS FLOOR PLATES
- FORM "C"**

Dimensions 1,000 x 1,000 mm /
R = 500 mm


Order nr. 1115910200000



**GLASS FLOOR PLATES
- FORM "D"**

Dimensions 1,000 x 1,000 mm


Order nr. 1115610200000



**GLASS FLOOR PLATES
- FORM "E"**

Dimensions 1,000 x 1,000 mm /
R = 800 mm

Order nr. 1115910300000










**GLASS FLOOR PLATES
- FORM "F"**

Dimensions 1,000 x 1,000 mm /
R = 500 mm

Order nr. 1115910400000

TECHNICAL PARAMETERS

FIREPLACE STOVES

Page	Model									
13	ADRIA MINI	95	33 cm	150	150	45-150	0.6-2.4	•	•	12
14	ALYTUS	120	33 cm	150	150	45-150	2.3	•	•	12
15	ARKTIC	92	50 cm	150	150	55-216	0.8-3.6	•	•	12
15	ARKTIC 12 WITH HOTPLATE	132	50 cm		150	70-221	0.8-3.7	•	•	12
16	AVESTA	162	33 cm	150	150	45-150	2.3	•	•	12
17	EBOLI	154	33 cm	150	150	40-151	0.7-2.4	•	•	12
18	EMPOLI	154	33 cm	150	150	40-151	0.7-2.4	•	•	12
19	HUSUM	156	33 cm	150	150	50-115	1.5-2	•	•	12
20	KALIX	147	33 cm	150	150	45-150	2.3	•	•	12
21	LEVANGER	108	33 cm	130	130	112	1.8	•	•	12
22	LIVORNO	135	33 cm	150		90-140	0.7-2.2	•	•	10
23	MALUNG RAINBOW	118	33 cm	150		90-140	1.1-2.5	•		10
24	MANTA - TILED TOP PLATE + PEDESTAL	126	33 cm	150	150	65-130	0.4-2.2	•	•	12
25	MANTA - TILED LEDGE BASE + PEDESTAL	126	33 cm	150	150	65-130	0.4-2.2	•	•	12
26	NORDBY	174	33 cm	150	150	55-115	0.5-1.8	•	•	11
27	NORDIC	65	33 cm	130		45-160	0.7-2.7	•	•	12
28	SALERNO II	93	29 cm	120	120	35-79	1.5	•		12
29	SAVONA	130	33 cm	150	150	45-150	2.3	•	•	12
30	SKARNES	124	50 cm	150	150	150	2.5	•	•	12
31	SKIVE II / II-C	113 / 125	50 cm	150	150	220	3.5	•	•	12
32	TREVISO II	142	33 cm	150	150	150	2.3	•	•	12
33	TREVISO II - TILED LEDGE BASE	147	33 cm	150	150	150	2.3	•	•	12
34	UKA	86	33 cm	130	130	35-110	2.2	•	•	12
35	UMEA	73	33 cm	150		40-130	2.1	•	•	12
36	VAASA PLUS III / V	88 / 85	33 cm	150		90-149	0.9-2.4	•	•	10

EXPLANATORY NOTES



Weight (kg)



Environment friendly pressed fuel



Lump wood (max. length in cm)



Brown-coal briquettes



Top flue-gas outlet (Ø mm)



Chimney draught (Pa)



Rear flue-gas outlet (Ø mm)



Volume of pellet container (kg)



Heating ability (m³)










Dimensions of glass w x d (mm)



Fuel consumption (kg/h)










FIREPLACE STOVES WITH HEAT EXCHANGER

Page	Model									
39	ADRIA II (PAVING/SHEETING) WITH HEAT EXCHANGER	136 / 129	33 cm	150		60-185	0.6-2.9	•	•	12
40	ALMO WITH HEAT EXCHANGER	148	33 cm	150		184	3	•	•	12
41	ALYTUS WITH HEAT EXCHANGER	146	33 cm	150		184	3	•	•	12
42	ANDRUS WITH HEAT EXCHANGER	246	33 cm	150		90-275	0.9-4.1	•	•	12
43	ARKTIC 12 WITH HEAT EXCHANGER	159	50 cm	150	150	70-225	0.9-3.4	•	•	12
43	ARKTIC 12 WITH HEAT EXCHANGER + HOTPLATE	153	50 cm		150	70-225	0.9-3.4	•	•	12
44	AVESTA WITH HEAT EXCHANGER	185	33 cm	150		184	3	•	•	12
45	BORAS AL II (PAVING/SHEETING) WITH HEAT EXCHANGER	135 / 129	33 cm	150	150	60-187	3	•	•	12
46	EBOLI AL II WITH HEAT EXCHANGER & EBOLI AL II WITH HEAT EXCHANGER + COOLING LOOP	168 169	33 cm	150	150	70-220	0.8-3.5	•	•	12
47	EMPOLI AL II WITH HEAT EXCHANGER & EMPOLI AL II WITH HEAT EXCHANGER + COOLING LOOP	168 169	33 cm	150	150	70-220	0.8-3.5	•	•	12
48	GRAND MAX WITH HEAT EXCHANGER	202	33 cm	150		250	1.3-3.8	•	•	12
49	GRAND MAX PLUS II/11 WITH HEAT EXCHANGER	205	33 cm	150		60-274	0.7-4	•	•	12
50	MANTOVA AL II (PAVING/SHEETING) WITH HEAT EXCHANGER	134 / 128	33 cm	150	150	60-189	0.7-3	•	•	12
51	NIVALA WITH HEAT EXCHANGER	221	33 cm	150		90-275	0.9-4.1	•	•	12
52	SAVONA WITH HEAT EXCHANGER	144	33 cm	150		184	3	•	•	12
53	TREVISO II WITH HEAT EXCHANGER	190	33 cm	150		150	2.5	•	•	12
54	TREVISO II - TILED PEDESTAL WITH HEAT EXCHANGER	195	33 cm	150		150	2.5	•	•	12











PELLET STOVES

Page	Model							
61	HSP 1.17 II	91	80	155	2	17	6	
62	HSP 7	127	80	148	1.9	12	6	
63	TOLEDO IV 32	110	80	149	1.9	32	6	
64	TOLEDO III 32-C	137	80	149	1.9	32	6	











FIREPLACE SETS

Page	Model									
69	ADONIS II	448	45 cm	180	180	50-166	0.7-2.5	678 x 400	•	12
70	ARLBERG	464	45 cm	180	180	50-166	0.7-2.5	678 x 400	•	12
71	ASCIM II	425	33 cm	160	160	40-135	0.6-2	325 x 470	•	12
72	DACHSTEIN	316	33 cm	160	160	40-135	0.6-2	325 x 470	•	12
73	GENF II	445	45 cm	180	180	50-166	0.7-2.5	678 x 400	•	12
74	PINUS II	316	33 cm	150	150	55-160	2.5	340 x 583	•	12
75	PINUS II CORNER	286	33 cm	150	150	55-160	2.5	340 x 583	•	12

FIREPLACE INSERTS

Page	Model										
77	JONAVA IV	148	45 cm	180	180	50-165	0.7-2.5	678 x 400	•		12
78	MALVIK IV	120	33 cm	160	160	40-135	0.6-2	325 x 470	•		12
79	NOVARA	179	45 cm	180	180	55-229	0.8-3.5	678 x 400	•	•	12
80	PINUS AL II	102	33 cm	150	150	160	2.5	583 x 340	•		12

FIREPLACE INSERTS WITH HEAT EXCHANGER

Page	Model										
84	AMADORA WITH HEAT EXCHANGER	152 / 153 / 154	45 cm	150		75-150	0.5-2.5	445 x 317	•	•	12
85	NOVARA WITH HEAT EXCHANGER	292	45 cm	180	180	90-313	1.1-4.5	678 x 400	•	•	12
86	VESUVIO II/10/1S WITH HEAT EXCH.	222	50 cm	160		281	4.6	501 x 370	•		12
86	VESUVIO II/12/2S WITH HEAT EXCH.	213	50 cm	160		283	4.6	501 x 370	•		12
86	VESUVIO II/13/1S WITH HEAT EXCH.	230	50 cm	160		364	5.8	501 x 370	•		12
86	VESUVIO II/15/2S WITH HEAT EXCH.	221	50 cm	160		362	5.9	501 x 370	•		12

HAAS
+
SOHN

QUALITY TIMES

Warmth. Salzburg style.



HAAS
+
SOHN

Warmth. Salzburg style.

QUALITY TIMES

COLLECTION 2018/19

HAAS+SOHN RUKOV s. r. o. 

Nádražní 260
407 56 Jiřetín pod Jedlovou
Czech Republic

Phone: +420 412 332 351-3

odbyt@haassohn.com
www.haassohn-rukov.cz/en

Your HAAS+SOHN dealer:

HOME 

The manufacturer reserves the right to minor design and technical changes.

Effective from 04/2018 to 03/2019.

H+S CATALOGUE HOME 2018/2019_EXPORT order nr. 9042000100051 (v201807).