

QUALITY TIMES
with our stove



PREMIUM

25

26



QUALITY TIMES
with our stove

CONTENT



SERVICE

Your service - plus	4
Pictogram overview Highlights /	5
Explanatory notes	5

PELLET STOVES

Produkt Highlights	7
Pellet stoves	9

PELLET STOVES WITH HEAT EXCHANGER

Produkt Highlights	19
Pellet stoves with heat exchanger	21



FIREPLACE STOVES


Produkt Highlights	22
Fireplace stoves	23

FIREPLACE STOVES WITH HEAT EXCHANGER

Produkt Highlights	36
Fireplace stoves with heat exchanger	35

FIREPLACE SETS

Example of an ascim casing	40
Fireplace sets	41



FIREPLACE INSERTS

Fireplace inserts	46
-------------------	----

ACCESSORIES

Heat exchangers, caps, cooling loops	50
Flue pipes for fireplace stoves	51
Flue pipes for pellet stoves	52
Log baskets, fireplace tools, repairing sprays, cleaning spray	53
Glass floor plates, flexi hoses, zugexs, zugreglers	53
Technical parameters	54

www.haassohn-rukov.com

Visit us also on





ECODESIGN 2022

FORWARD-THINKING

Fire always works the same. You need the right amount of air in the right place. At HAAS+SOHN, we can ensure that. Air supply affects stove emissions and fuel consumption. A clean environment is important to us and our children. Therefore, our stoves have multiple air inlets distributed and regulated so that combustion is always as efficient and clean as possible. Since 2018, all our products have complied with the EU's ECODESIGN 2022 regulations and have prominently displayed their energy class markings. You will always find this information on each stove in the form of an energy label.



YOUR SERVICE - PLUS

OUR PROMISE

We are committed to making sure that you can still enjoy your stove even after 15 years have passed. That's why we will still be within reach after you heat up your stove for the first time. Do you need advice? Or is your stove not working the way it should? Write to us at poradna@haassohn.com. We are here to help, no matter how old your stove is.



QUALITY TIMES
with our stove

PICTOGRAM OVERVIEW



Fast heating of air in the room



Replaceable exchanger

option of replacing the exchanger with a dummy plug



Automatic secondary air control

easy and convenient control



Double-Air function – can heat 2 rooms at the same time



Cooling loop

protection from exchanger overheating



Automatic door closing

just release the door and it closes on its own



Colour touch screen and integrated WLAN module



Heat exchanger cleaning

simple and clean



WLAN

optional feature WLAN Local & Global



Simple operation using a mobile app



Tertiary combustion

air supply directly to the flame saves fuel



Fully automatic temperature control

the optimum room temperature exactly when you need it



Gas tightness certified

does not require air from the room for combustion



Heat accumulation

for long-term radiation of heat



Friendly for allergic persons



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Large glazed area



Closable external air intake

central air intake closing system – no heat loss



Automatic primary combustion air regulator

prevents problems during power outages



Enamel technology



The icon in the catalogue that identifies stoves suitable for low-energy houses. It provides quick orientation when choosing low-output stoves with external air intake, suitable for low-energy and passive houses.



EXPLANATORY NOTES



Rear flue-gas outlet (Ø mm)



Weight (kg)



Pellets



Top flue-gas outlet (Ø mm)



Chimney draught (Pa)



Lump wood (max. length in cm)



Back external combustion air supply (Ø mm)



Environment friendly pressed fuel



Lower external combustion air supply (Ø mm)



Brown-coal briquettes

Heating capacity:

It is determined based on applicable standards and the specific annual energy consumption of a typical low-energy house with the room height of 2.5 m built between 2002 and 2008. You must remember that the annual energy consumption depends on many factors such as the room height, age and condition of the masonry and insulation, the window area, house orientation, temperature differences and other aspects. The value can vary.



MONTHS OF
WARRANTY



Your benefit

EXTENDED WARRANTY

How to get an extra year of service for free? With our warranty extended to 36 months. Simply **register in the HAAS+SOHN smartphone application** (see the QR codes below) **within four weeks of purchase**. Under the extended warranty, **you will have all warranty repairs free of charge, without paying for spare parts or service technicians' work.**

The extended warranty can be used after the legal warranty's expiration.

HAAS+SOHN APP



Android



iOS



Your benefit

INTELLIGENT AND COMFORTABLE

- + new, simple operation concept
- + simple use
- + fully automatic temperature control
- + energy-efficient heating
- + extremely silent operation
- + suitable for allergic persons
- + easy to clean
- + lowest energy consumption: only 30-50 W/h, only 9 W/h in the standby mode



HAAS+SOHN
APP

COMFORTABLE
CONTROL FROM
A SMARTPHONE

Available on the
App Store

GET IT ON
Google play



WHY ARE PELLET STOVES A GOOD CHOICE?

Who better to tell you more about the benefits of pellet stoves than the users themselves.

What are the most frequently mentioned benefits?

Heating without work and chopping wood - „I simply press a button and start heating.“ „I have a lot of work building the house and I am glad that I don't need to also chop wood.“

Clean and dust-free - „My wife and children suffer from asthma and allergies. We sought a suitable heating system that would at the same time give us a traditional view of the fire. A pellet stove is a clear choice.“ „I did not want to turn my living room into a boiler room.“

Simple operation - „It can be operated easily, even by my wife and small children. I work long hours, and for this reason we sought a heating method which even a woman in the household can cope with. She need not carry a heavy basket of wood.“ „I can set the automatic operating mode and the stove automatically switches itself on and off.“

Simple control via the smart phone application - „I appreciate simple control via a smart phone. I can check the heating conditions at home even when I am out.“ „I can fire up the stove via my smart phone when I am on my way home from work and my home is already warm when I arrive.“

Safety thanks to inbuilt sensors and detectors - „The stove monitors the set temperature, thus precluding overheating.“ „We have a pellet stove with an exchanger, which easily heats the entire house. The stove automatically switches off when it runs out of fuel or the power fails.“

Easy maintenance - „Maintenance is really easy and it generates minimal ash. I subsequently use the ash on the garden in the greenhouse.“ „I need not clean the firebox and remove the ash everyday, which is a great comfort.“

Quality times - „A beautiful accessory for the interior, we like the view of the flames. Moreover, a quality pellet stove gives out the fragrance of wood.“ „The quality workmanship of the stove, the feeling we get from the view of the open flames, truly romantic.“

simple

effective

heating

Comfortable, efficient and ecological heating!

PELLET STOVE CONTROL

USING SMART TECHNOLOGY FROM HAAS+SOHN



Pellet stoves with WLAN module Obeying at a distance

For your comfort and freedom. With the stove control through a mobile phone you can control the warmth of your home wherever you are. Just connect the WLAN module with two functions to your stove:

- ✚ Local Function 🏠 - for control at home and its vicinity (garden, garage)
- ✚ Global Function 🌐 - or control from any place in the world

The stove connects to the home Wi-Fi through the WLAN module. If the Wi-Fi network is not available or the connection fails, the module will create its own hotspot. In such case only the Local Function is active. You just need to connect once for long-term use QUALITY TIMES.



HAAS+SOHN Application Comfortable control from a smartphone

Download your HAAS+SOHN application for free and start controlling your pellet stove. Simply, safely and comfortably.

- ✚ Optional for-set weekly program, up to 3 time intervals for 1 day
- ✚ Up to 5 family members can control one stove
- ✚ Up to 5 pellet stoves can be connected to one application
- ✚ The colour background of the application shows the operational mode of the stove (red - heating, blue - cooling, purple - switching off, green - ECO-Mode, grey - switched off)
- ✚ The application will remind you to add fuel, clean the stove or order a service
- ✚ It monitors average fuel consumption



Simple control

Comfortable and simple control with just four pushbuttons. Display with a well-arranged menu.



Large glazed area

You won't recognise that it is a pellet stove. The flame looks as if logs were burning inside.



Friendly for allergic persons thanks to the heat exchanger

Heated air is not blown into the room by a fan. The heat rises on its own, without vibrations or noise. You can fall asleep next to our pellet stove, breathing comfortably. Ideal for allergic persons.



Extremely quiet operation

You will barely hear the stove working.



Fully automatic temperature control

Simply set different temperatures for different times of the day. With an integrated room temperature sensor, the stove monitors the temperature in the room and heats to maintain the pre-set value. The pellet stove will recognise a temperature drop in the room and it will start heating it up. When it reaches the required temperature, it will reduce its output. There's no need to switch it on or off, just add pellets.




Gas tightness certified


A pellet stove with a gas tightness certificate complying with the NF EN 14785 standard. An ideal choice for low-energy, passive and thermally insulated houses. Blower-door test compliant. The stove draws 100% of the air needed for combustion from outside (external CPV intake). Thanks to this feature the combustion process is fully independent of the air in the room and the fire does not use oxygen in the house. If you are not using the stove, heat is not drawn out of the room.




HAAS+SOHN Application Comfortable control from a smartphone

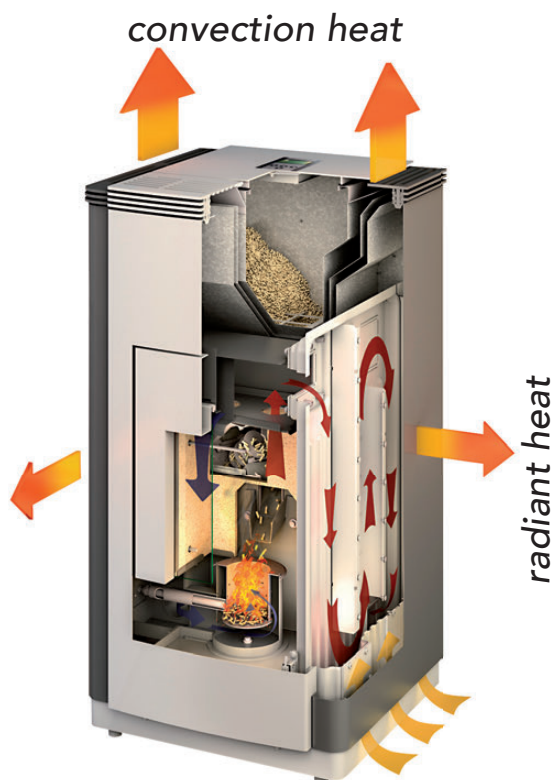



HSP 4 PARMA 
Page 10




HSP 4 PRATO 
Page 11



HSP 6 RUEDA RLU 
Page 12




HSP 6 RUEDA C RLU 
Page 13



HSP 6 TOLEDO IV 32 
Page 14




HSP 7 II 
Page 15



HSP 7 II GRANDE RLU 
Page 16



HSP 7 II GRANDE RLU
DE LUXE 
Page 17



HSP VIANO 
Page 18



PREMIUM



HSP 4 PARMA

Highlights



Fast heating of air in the room



Colour touch screen and integrated WLAN module






WLAN

optional feature WLAN  Local &  Global



AIR Double-Air function - can heat 2 rooms at the same time



Capacity	2.5-8.5 kW
Efficiency	90% A++
Heating ability	max. 153 m ³
Dimensions h / w / d	1,208 / 563 / 578 mm
Weight	207 kg
Fuel consumption / h	1.9 kg
Volume of pellet container	32 kg
Chimney draught	12 Pa
Fuel	
 Ø 60 mm	 Ø 80 mm

Accessories you'll find on the end of the catalogue.



HSP 4 PARMA
white

0545508540000



HSP 4 PARMA
glossy black

0545508510000




ROOM TEMPERATURE
SENSOR

cable 8 m (not included)

0532007010000



WLAN MODUL
is part of the stove

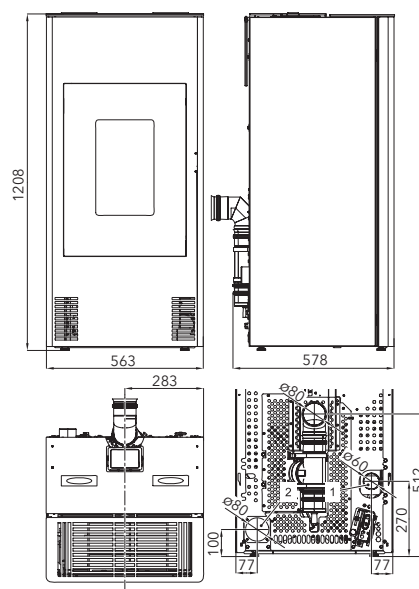



PREMIUM

HSP 4 PRATO

Highlights



Fast heating of air in the room



Colour touch screen and integrated WLAN module






Simple operation using a mobile app



Double-Air function - can heat 2 rooms at the same time



Capacity	2.4-8.5 kW		
Efficiency	92%		A++
Heating ability	max. 153 m ³		
Dimensions h / w / d	1,210 / 540 / 556 mm		
Weight	184 kg		
Fuel consumption / h	1.9 kg		
Volume of pellet container	17 kg		
Chimney draught	12 Pa		
Fuel			
 Ø 60 mm		 Ø 80 mm	

Accessories you'll find on the end of the catalogue



HSP 4 PRATO
glossy black
0545908510000




HSP 4 PRATO
white
0545908540000



**ROOM TEMPERATURE
SENSOR**
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

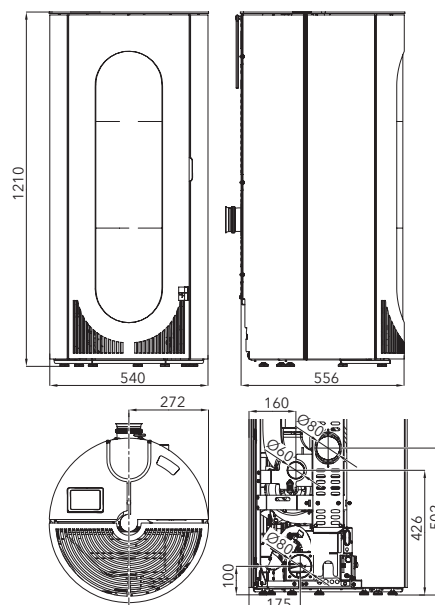

PELLET STOVES



PREMIUM



HSP 6 RUEDA RLU

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Gas tightness certified

does not require air from the room for combustion



Large glazed area



Capacity	2.4-8.3 kW	
Efficiency	90%	A ⁺
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,201 / 550 / 500 mm	
Weight	122 kg	
Fuel consumption / h	1.94 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.



HSP 6 RUEDA RLU
anthracite, black ledges
0546532810000




HSP 6 RUEDA RLU
anthracite, white ledges
0546532830000



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

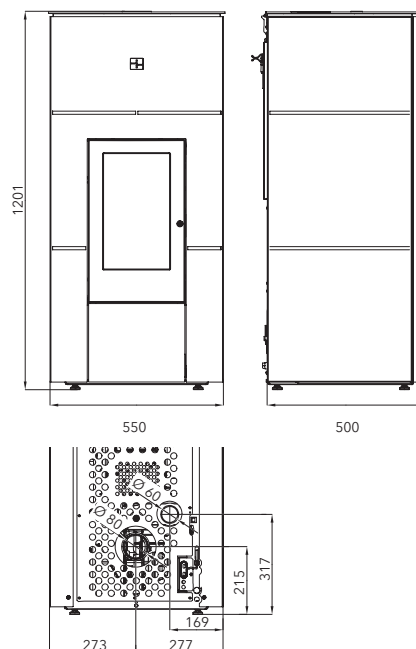



PREMIUM



HSP 6 RUEDA C RLU

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Gas tightness certified

does not require air from the room for combustion



Large glazed area



Capacity	2.4–8.3 kW	
Efficiency	90%	A ⁺
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,201 / 560 / 513 mm	
Weight	163 kg	
Fuel consumption / h	1.94 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	



ROOM TEMPERATURE SENSOR

cable 8 m (not included)

0532007010000



WLAN MODUL
is part of the stove





HSP 6 RUEDA C RLU
anthracite, metallic tiles
0546532750000



HSP 6 RUEDA C RLU
anthracite, white tiles
0546532760000



HSP 6 RUEDA C RLU
anthracite, red patina tile*
0546532770000

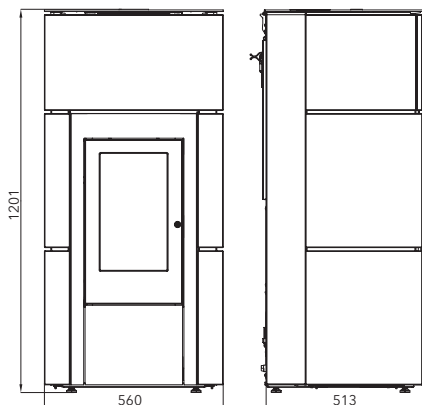

Tile – the colour may differ, or may contain hair cracks.

PELLET STOVES

*Offer valid until stocks last.



PREMIUM

HSP 6 TOLEDO IV 32

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Friendly for allergic persons



Large glazed area



Capacity	2,4–8,3 kW	
Efficiency	90%	A ⁺
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,201 / 544 / 499 mm	
Weight	118 kg	
Fuel consumption / h	1.9 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue





HSP 6 TOLEDO IV 32
anthracite, grey
0543408670000



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

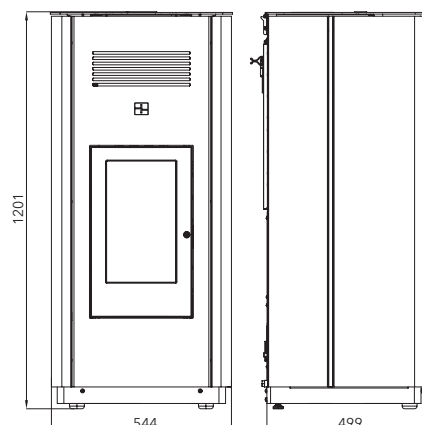



PREMIUM



HSP 7 II

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Large glazed area



Friendly for allergic persons



Capacity	2.4-8.2 kW	
Efficiency	90% A⁺	
Heating ability	max. 148 m ³	
Dimensions h / w / d	1,053 / 494 / 494 mm	
Weight	126 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	12 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.




HSP 7 II
black
0545008580000



**ROOM TEMPERATURE
SENSOR**
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

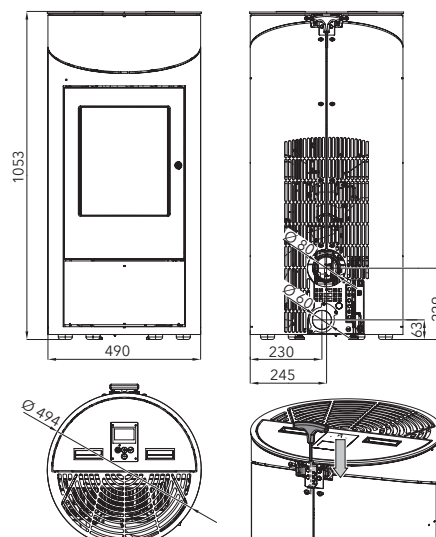

PELLET STOVES



PREMIUM



HSP 7 II GRANDE RLU

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Gas tightness certified

does not require air from the room for combustion



Large glazed area






ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove



Capacity	2.4–8.2 kW	
Efficiency	90% A+	
Heating ability	max. 148 m ³	
Dimensions h / w / d	1,173 / 494 / 494 mm	
Weight	132 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	17 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.




HSP 7 II GRANDE RLU
black
0545108510000



HSP 7 II GRANDE RLU
white komaxit
0545108520000



HSP 7 II GRANDE RLU
grey
0545108500000

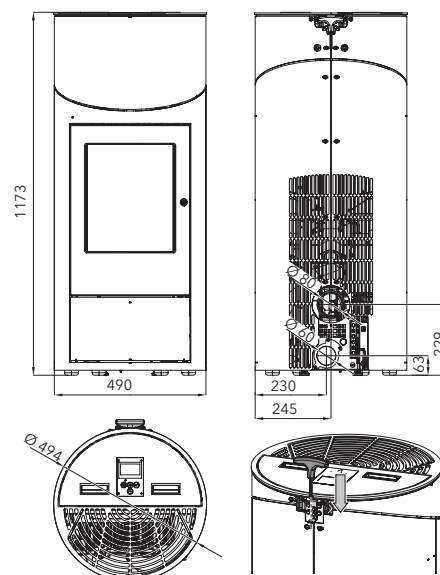



PREMIUM



HSP 7 II GRANDE RLU DE LUXE

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Gas tightness certified

does not require air from the room for combustion



Large glazed area



Capacity	2.4–8.2 kW	
Efficiency	90% A⁺	
Heating ability	max. 148 m ³	
Dimensions h / w / d	1,173 / 494 / 494 mm	
Weight	132 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	17 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.



HSP 7 II GRANDE RLU
DE LUXE

red

0545108570000



HSP 7 II GRANDE RLU
DE LUXE

glossy grey


0545108600000



ROOM TEMPERATURE
SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

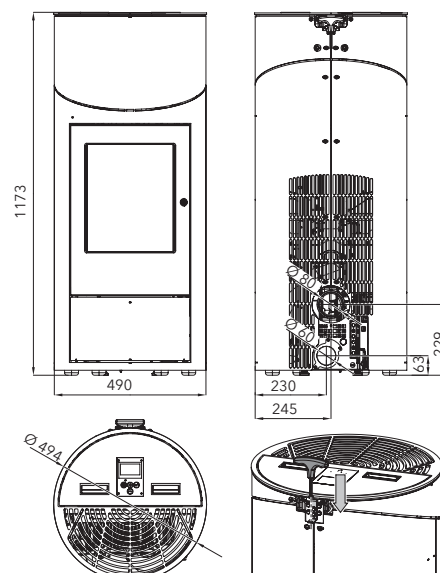

PELLET STOVES



PREMIUM



HSP VIANO

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Friendly for allergic persons



Large glazed area



Capacity	2.4–8.6 kW	
Efficiency	90% A⁺	
Heating ability	max. 155 m ³	
Dimensions h / w / d	963 / 522 / 524 mm	
Weight	99 kg	
Fuel consumption / h	1.99 kg	
Volume of pellet container	17 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 40 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.






HSP VIANO
anthracite, black
0571307520000



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove





HSP 6 
with heat exchanger
Page 21



PELLET STOVES S WITH HEAT EXCHANGER

smart heating



Smart heating with HAAS+SOHN

Enjoy heat from pellets throughout your house. The pellet stove with exchanger is connected to your central heating system and heats up the water in the radiators. You can use the control panel to simply adjust how much heat the stove transfers to the central heating system and how much heat is to be transferred directly to the air in your room. The stove monitors the pre-set temperature automatically and you can control it remotely using your mobile application. You do not need to chop wood for this pellet stove with exchanger. Just refill with pellets once every three days. The stove can be used as the main source of heat and it is great for transition periods (autumn, spring). Using pellets for your heating system will save you money in comparison with systems using direct heaters or electric boilers.

- ✦ direct room heating
- ✦ indirect heating of other rooms
- ✦ an economical and additional source of heat, great for transition periods
- ✦ 50% lower costs when compared with electric heating systems
- ✦ can be controlled from anywhere thanks to the mobile application



Exchanger

Transfers heat from the stove to your heating system. Up to 79% of the heat produced by the stove can be used to heat up the water in your system while the rest heats the air in the room. A pellet stove with a heat exchanger will heat your house or it can be used to heat up water for showering. It can be combined with solar panels, gas boilers or solid fuel boilers.

Notice: Pellet stoves with a heat exchanger cannot be used without being connected to your heating system (central heating system) The connection must be done by a professional company.



Patented heat exchanger cleaning technology

You can even clean the exchanger with the door closed. Clean the dirt from pipes by simply moving the wiping blade.


Hydraulic module

All you need to connect your stove to your central heating system is available and ready in a single module inside your stove. It will save you space and money.

It consists of:

- ✦ circulation pump,
- ✦ safety valve,
- ✦ three-way valve,
- ✦ aerating valve.

Supplied with a rear or lower outlet (floor connection).

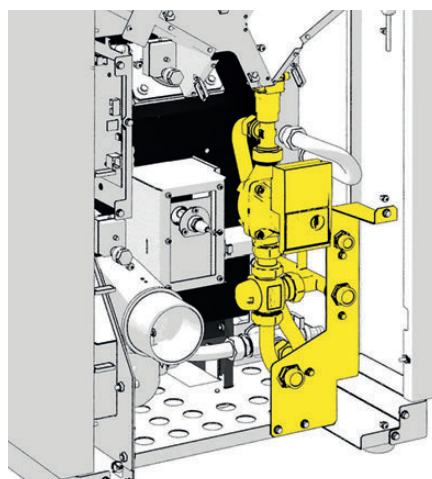



PREMIUM



HSP 6 with heat exchanger

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it






Heat exchanger cleaning

simple and clean



Friendly for allergic persons



Capacity (in heaters)	3.2-10.9 kW (6.8 kW)	
Efficiency	93% A++	
Heating ability	max. 196 m³	
Dimensions h / w / d	1,200 / 545 / 498 mm	
Weight	178 kg	
Fuel consumption / h	2.41 kg	
Volume of pellet container	32 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.



WLAN MODUL
is part of the stove



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000




HYDRAULIC MODULE
(not included)
0553808214000



HSP 6
anthracite, black
0553808500000



HSP 6
anthracite, white
0553808510000

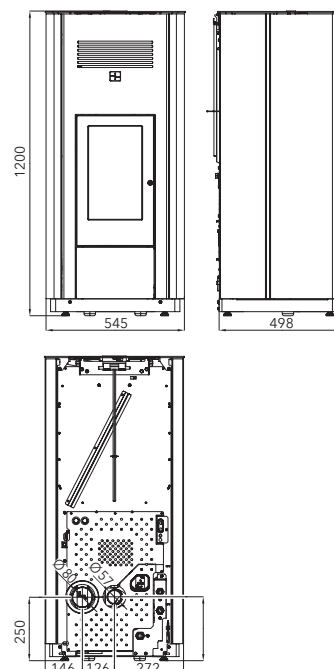

PELLET STOVES WITH HEAT EXCHANGER



FIREPLACE STOVES

economical + efficient

YOUR BENEFITS

- + simple and safe operation
- + low amount of soot thanks to new combustion technologies, low cleaning effort
- + lower contamination by particles
- + maximum heating cost saving
- + increased efficiency - more heat with less wood unobstructed view of the fire thanks to
- + continuous front glass clearing

WOOD BURNING STOVES WITH MODERN TECHNOLOGY

Easy Control Air regulation

Easy Control will help you heat properly. You can control the air supply (primary, secondary, tertiary) into the hearth with a single controller.



1. Start

Press „Start“ for sufficient air supply to make a fire until it starts burning evenly.



2. Heating

After starting the fire, turn the controller to the top „Burning“ position for clean and efficient combustion.



3. Closing


When you decide to stop heating and the fire goes out, you can switch the controller to the „0“ position to keep the heat inside the room. Thanks to the closable air supply, the heat from the fireplace stove remains inside the room and you can enjoy it longer.

Heat accumulation

For long-term radiation of heat. After 2 hours of operation the stove radiates heat for 10 more hours.

Optional accessory for the MOLDE, OVALIS and PISA RLU fireplace stove. New HAAS+SOHN accumulation set made of magnesite has double accumulation capacity than steatite.

You can add the accumulation set anytime later.
The installation is very simple.



External air supply (CPV)

Optional supply of air from outside. Inside you can breathe better because the stove doesn't burn air that has already been heated once. Ideal for houses with thermal insulation, necessary for passive and low-energy buildings.

Gas tightness certified

A stove with a gas tightness certificate (issued by DIBt). An ideal choice for low-energy, passive and thermally insulated houses. Blower-door test compliant. The stove draws 100% of the air needed for combustion from outside (external CPV intake). Thanks to this feature, the combustion process is fully independent of the air in the room and the fire does not use the oxygen in the house. If you are not using the stove, the heat is not drawn out of the room via the stove. Therefore, the stove does not cause any heat loss.

Automatic door closing

Just release the door and it closes on its own.

Automatic secondary air control

The stove automatically controls the secondary air intake. Simply open the primary air intake before you start a fire. Once the fire starts burning you can close the primary air intake. The rest of the combustion process is controlled by the stove. Based on the available firewood, the stove adjusts the secondary air intake automatically to make sure that the combustion process is most efficient. This allows you to utilise the maximum amount of heat produced by each log while keeping emissions low.




NEW

BRILLO 
Page 24



DALE 
Page 26



DALE with an oven 
Page 27



EPIC 
Page 28



FENIX 
Page 29



HERBORN II 
Page 30



MOLDE 
Page 31



OVALIS Grande 
Page 32



OVALIS Piccolo 
Page 32



PINEROLO 
Page 33



PISA RLU 
Page 34



PREMIUM



BRILLO

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Automatic door closing

just release the door and it closes on its own



Gas tightness certified

does not require air from the room for combustion






new




BRILLO
black / ivory
0435315500000



COVER CAP
(included)

Capacity	3.4–6.7 kW		
Efficiency	81 % A⁺		
Heating ability	max. 120 m ³		
Dimensions h / w / d	1377 / 710 / 566 mm		
Weight	149 kg		
Fuel consumption / h	2 kg		
Chimney draught	12 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			

Accessories you'll find on the end of the catalogue.

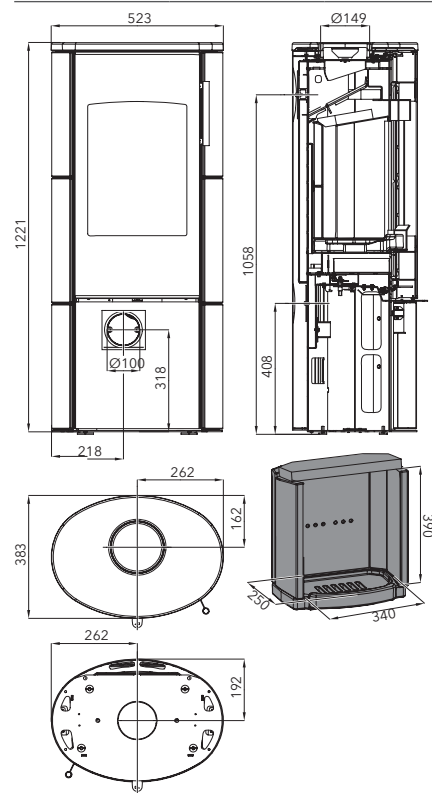

BETTER THAN TV

Watching the flames never gets old.

From the earliest times people have gathered around a fireplace, and this need has survived until the present day. The stoves are no longer only used for heating but also to evoke an atmosphere. Thanks to the fireplace stove, you perceive "different" heat and enjoy GREAT MOMENTS.

QUALITY TIMES

with our stove





PREMIUM



DALE

Highlights



Tertiary combustion

air supply directly to the flame saves fuel



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator










External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss

Capacity	4.1–8.2 kW	
Efficiency	80% A⁺	
Heating ability	max. 147 m ³	
Dimensions h / w / d	872 / 777 / 452 mm	
Weight	153 kg	
Fuel consumption / h	2.5 kg	
Chimney draught	12 Pa	
Fuel	 50 cm  	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm
 Ø 100 mm		

Accessories you'll find on the end of the catalogue.



DALE

black, stove tiles anthracite metallic


0434717000000



DALE

black, red patina tile*

0434717010000

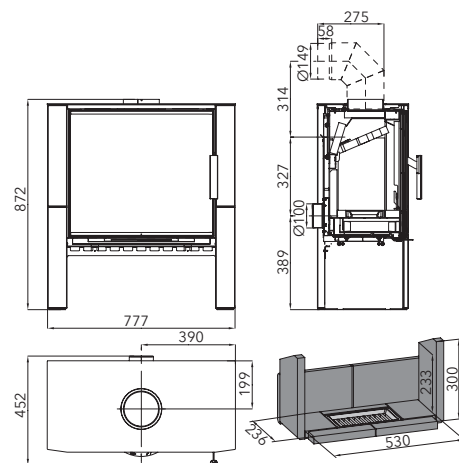

Tile – the colour may differ, or may contain hair cracks.

*Offer valid until stocks last.



PREMIUM



DALE WITH AN OVEN

Highlights



Tertiary combustion

air supply directly to the flame saves fuel



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator







External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss

Capacity	4–8.1 kW
Efficiency	88% A
Heating ability	max. 146 m ³
Dimensions h / w / d	1,296 / 780 / 443 mm
Weight	231 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	 50 cm
 Ø 100 mm	 Ø 150 mm
 Ø 100 mm	


Accessories you'll find on the end of the catalogue.



DALE WITH AN OVEN

anthracite, tiles metallic

0434715360000

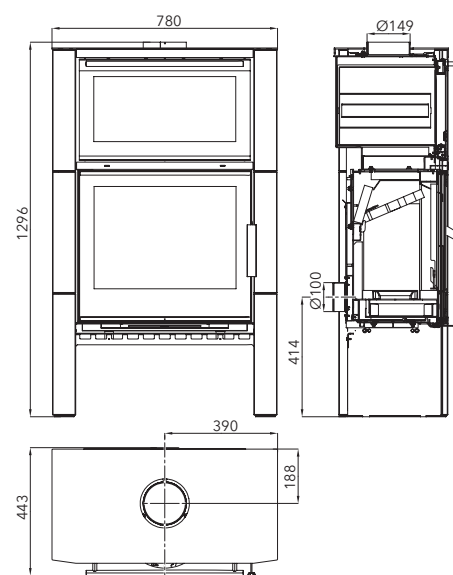

 Oven dimensions
468 / 271 / 327 mm

Tile – the colour may differ, or may contain hair cracks.

FIREPLACE STOVES



PREMIUM



EPIC

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Automatic door closing

just release the door and it closes on its own



Gas tightness certified






does not require air from the room for combustion



FLANGE FOR CONCENTRIC FLUE (not included)

0494015006025

*If a concentric flue flange is used with Woodstone tile, the customer must purchase a new sheet metal or stone top cover that has a larger diameter for the flue!

Capacity	3.4–6.7 kW		
Efficiency	81 %		A ⁺
Heating ability	max. 120 m ³		
Dimensions h / w / d	1,208 / 526 / 386 mm		
Weight	134 kg white, titanium 190 kg Woodstone		
Fuel consumption / h	2 kg		
Chimney draught	12 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			

Accessories you'll find on the end of the catalogue.



EPIC
black, Woodstone Prestige
0435315300000




EPIC
black, Graywood Sandstone
0435315310000



EPIC
black, white
0435315000000



EPIC
black, titanium
0435315010000

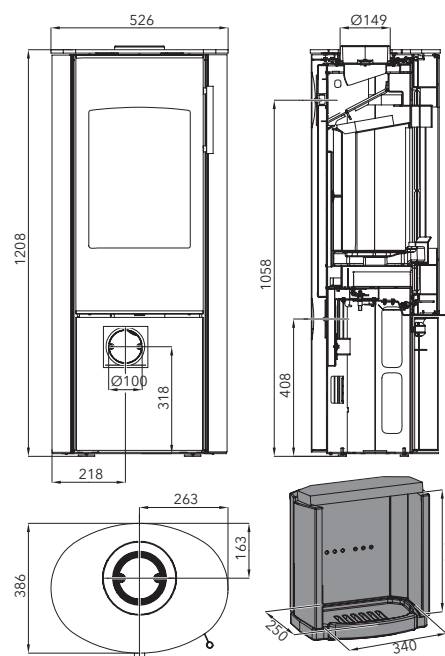

Natural stone – the colour/structure may differ.



PREMIUM



FENIX

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses








Automatic door closing

just release the door and it closes on its own



Gas tightness certified

does not require air from the room for combustion

Capacity	3.4-6.7 kW	
Efficiency	81% A⁺	
Heating ability	max. 120 m ³	
Dimensions h / w / d	1,208 / 526 / 386 mm	
Weight	134 kg	
Fuel consumption / h	2 kg	
Chimney draught	12 Pa	
Fuel	 33 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm
 Ø 100 mm		


Accessories you'll find on the end of the catalogue.



FENIX
black, 3-sided window
0435315400000



**FLANGE FOR
CONCENTRIC FLUE**
(not included)
0494015006025

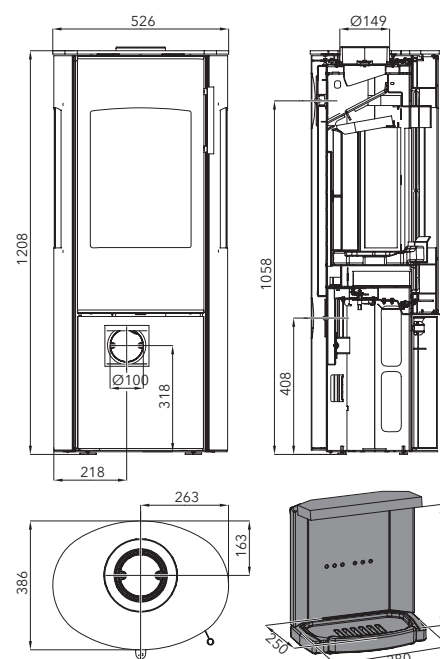

FIREPLACE STOVES



PREMIUM



HERBORN II

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses







Closable external air intake

central air intake closing system – no heat loss



Tertiary combustion

air supply directly to the flame saves fuel


Capacity	3–6.4 kW		
Efficiency	82% A⁺		
Heating ability	max. 115 m ³		
Dimensions h / w / d	942 / 492 / 519 mm		
Weight	116 kg		
Fuel consumption / h	1.60 kg		
Chimney draught	12 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	

Accessories you'll find on the end of the catalogue.



HERBORN II*
black

0429515600000

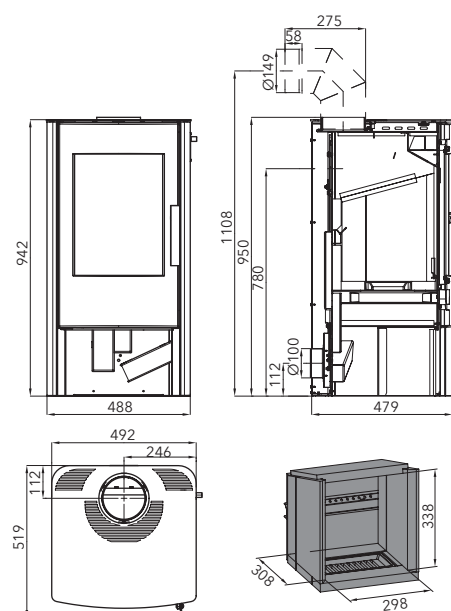



PREMIUM



MOLDE

Highlights



Closable external air intake
central air intake closing system – no heat loss








Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3–6.4 kW		
Efficiency	81% A⁺		
Heating ability	max. 115 m ³		
Dimensions h / w / d	1,177 / 589 / 482 mm		
Weight	233 kg		
Fuel consumption / h	1.9 kg		
Chimney draught	11 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			


Accessories you'll find on the end of the catalogue.




MOLDE
black, Denim blue
0424617430000



MOLDE
black, Kunststein Grau (poured concrete)
0424617420000



ACCUMULATION SET FOR MOLDE
57 kg (not included)
0424617401000

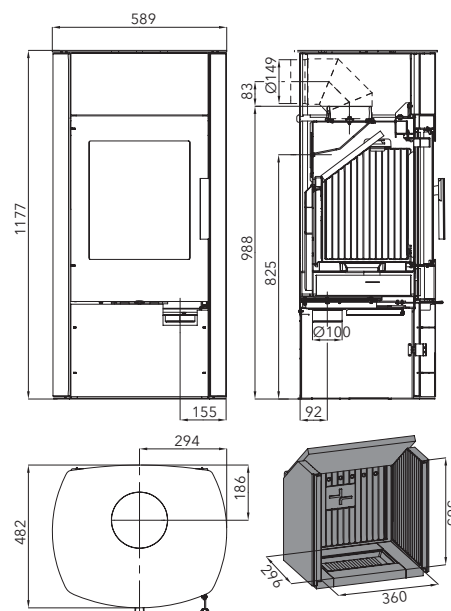

Natural stone – the colour/structure may differ.

FIREPLACE STOVES



PREMIUM

OVALIS

Highlights



Automatic secondary air control
easy and convenient control







External combustion air supply
ideal for low-energy houses



Automatic door closing
just release the door and it closes on its own




Heat accumulation
for long-term radiation of heat

Capacity	2.5-5.3 kW	
Efficiency	81% A⁺	
Heating ability	max. 95 m ³	
Dimensions h / w / d Grande	1,552 / 464 / 487 mm	
Dimensions h / w / d Piccolo	1,171 / 464 / 487 mm	
Weight Grande	127 kg	
Weight Piccolo	117 kg	
Fuel consumption / h	1.5 kg	
Chimney draught	12 Pa	
Fuel	 30 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm


Accessories you'll find on the end of the catalogue.



OVALIS GRANDE*
black
0428612620000



OVALIS PICCOLO*
black
0428612610000






**ACCUMULATION SET
FOR OVALIS GRANDE**
70 kg (not included)
0428650500000

**ACCUMULATION SET
FOR OVALIS PICCOLO**
46 kg (not included)
0428650600000



KNIE
for rear flue
Ø 150 mm, 90° (not included)
0332015007065

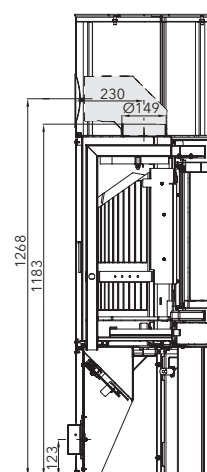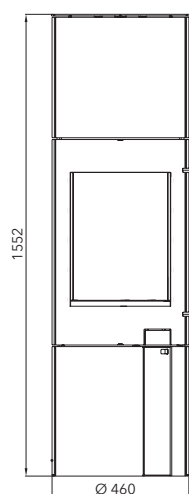

*Offer valid until stocks last.



PREMIUM

PINEROLO

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses







Closable external air intake

central air intake closing system – no heat loss



Tertiary combustion

air supply directly to the flame saves fuel

Capacity	3–6.4 kW	
Efficiency	82% A⁺	
Heating ability	max. 115 m ³	
Dimensions h / w / d	1,004 / 540 / 524 mm	
Weight Speckstein	208 kg	
Weight Woodstone	179 kg	
Fuel consumption / h	1.5 kg	
Chimney draught	12 Pa	
Fuel	 33 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm

Accessories you'll find on the end of the catalogue.




PINEROLO

black, Woodstone Prestige
0429415600000



PINEROLO

black, Speckstein
0429415630000

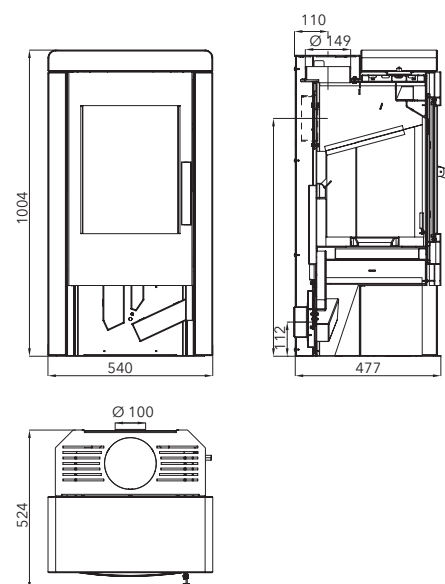

FIREPLACE STOVES

Natural stone – the colour/structure may differ.



PREMIUM



PISA RLU

Highlights

RLU

Gas tightness certified
does not require air from the room for combustion

AUTO
AIR





Automatic secondary air control
easy and convenient control

[]

Heat accumulation
for long-term radiation of heat

AUTO
DOOR

Automatic door closing
just release the door
and it closes on its
own

Capacity	2.6–5.4 kW	
Efficiency	87% A⁺	
Heating ability	max. 97 m ³	
Dimensions h / w / d	1,441 / 460 / 488 mm	
Weight	122 kg	
Fuel consumption / h	1.25 kg	
Chimney draught	12 Pa	
Fuel	 33 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm

Accessories you'll find on the end of the catalogue.




PISA RLU
black
0429112710000



**ACCUMULATION SET
FOR PISA RLU**
70 kg (not included)
0428650500000



KNIE
for rear flue
Ø 150 mm (not included)
0332015007065

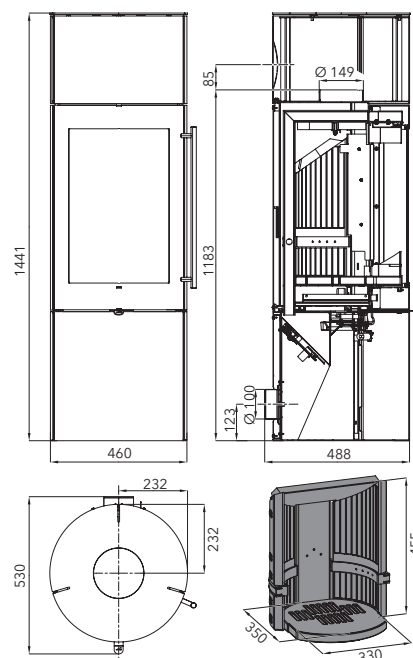




FARUM 
Page 38



VISBY II 
Page 39

FIREPLACE STOVES WITH HEAT EXCHANGER

smart heating

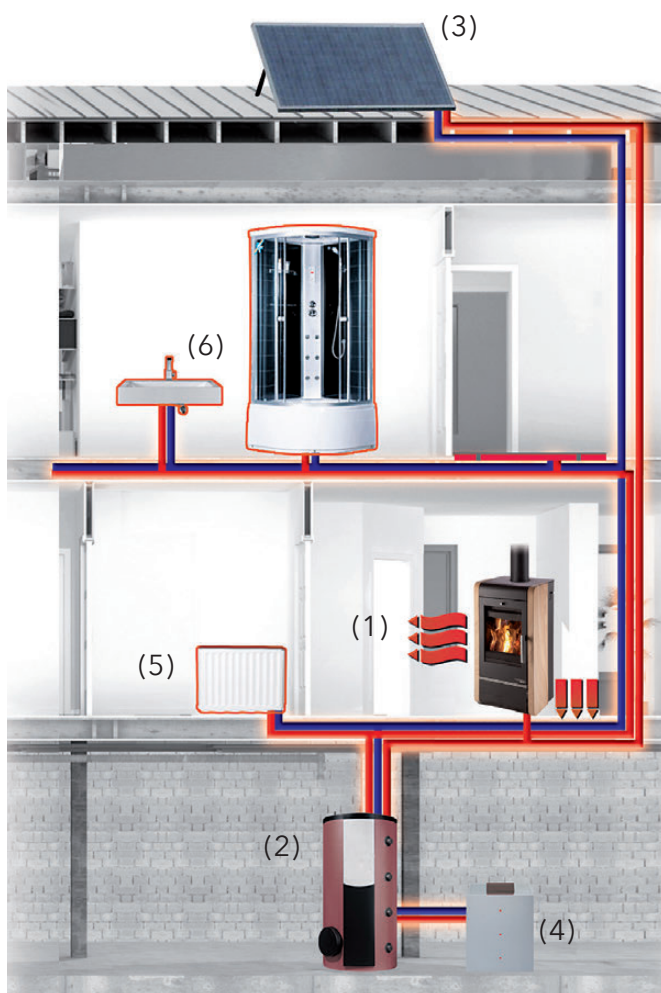

Part of the heat is used to heat the space in which the stove is installed (1). The rest is stored in the accumulation tank (2), which can also be supplied from other heat sources, e.g., boilers (4), solar panels (3). When needed, the heat from the tank can be supplied to the heating system (radiators) (5) or it can be used to heat water (6).

Warning:

The exchanger cannot be used without a connection to a heating system. Only a specialised company can make the connection.



Smart heating with HAAS+SOHN

A stove can be more than just an interior accessory, it can heat the entire house. Fireplace stoves with a heat exchanger can be connected to the central heating and heat the water in radiators. A quality warm-water heat exchanger can transfer 70% of the heat to water. Our stoves with exchangers have enough power to heat service water as well. A few logs can not only make you warm, but also prepare hot water for you.



Patented exchanger cleaning

Cleaning the exchanger is even easy with the door closed. You can remove the debris from the tubes simply by moving the wiper blade.



Replaceable heat exchanger

You can add the exchanger to the stove at any time, or remove it and replace it with a plug. This allows additional connection to a heating system (central heating) or refitting to hot-air operation.




Automatic controller of primary combustion air

Prevention of the stove from overheating after a power failure. After a power failure the circulating pump, which pumps water into the radiators, stops working. The heat accumulates in the exchanger and there's a risk of it overheating (the water temperature in the system is near boiling point). When the water in the exchanger reaches 95 °C, the thermostatic valve shuts off the primary air supply. This will reduce the combustion and prevent the temperature from increasing.

CONNECTION DIAGRAM WHEN USING UPS

Informative diagram of the heating system.

Overheating protection during electrical power failure by using an uninterrupted power supply (UPS).

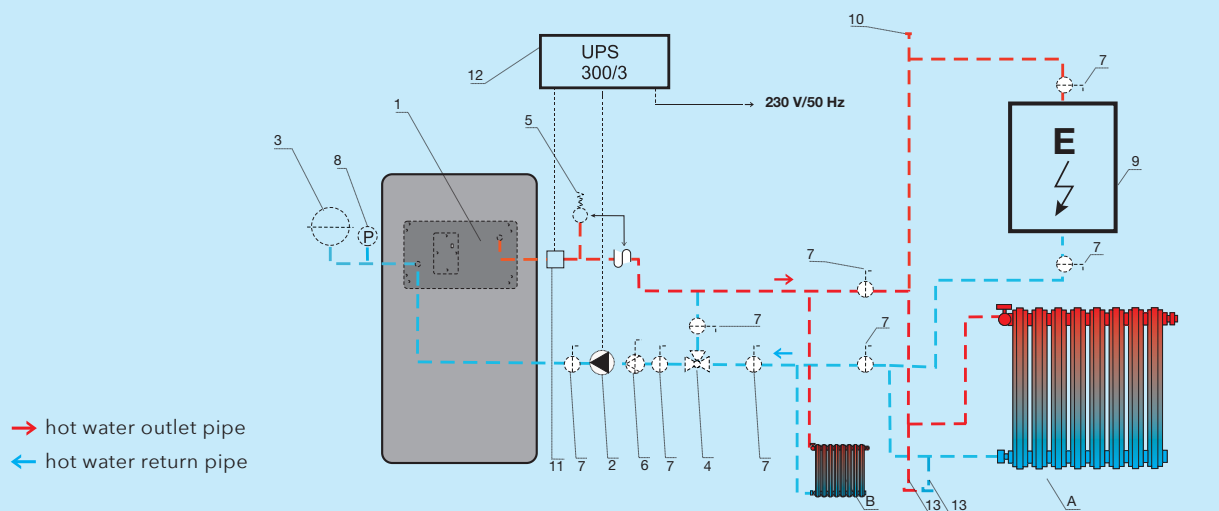

LEGEND:


- 1. fireplace stoves with exchanger
- 2. circulation pump
- 3. expansion tank
- 4. thermo-regulation valve, e.g. ESBE TV 25 (60-75 °C)

- 5. pressure relief valve
- 6. closing filter
- 7. ball shut-off valve
- 8. pressure gauge
- 9. electric boiler

- 10. ventilation valve
- 11. attached thermostat
- 12. UPS („backup power supply“)
- 13. release vent
- A. connection to the entire heating system
- B. connection to part of the heating system

DIAGRAM OF CONNECTION WITH COOLING LOOP

Informative diagram of connection of the exchanger with the cooling loop to the hot-water exchanger, against overheating in the event of an electrical power outage.

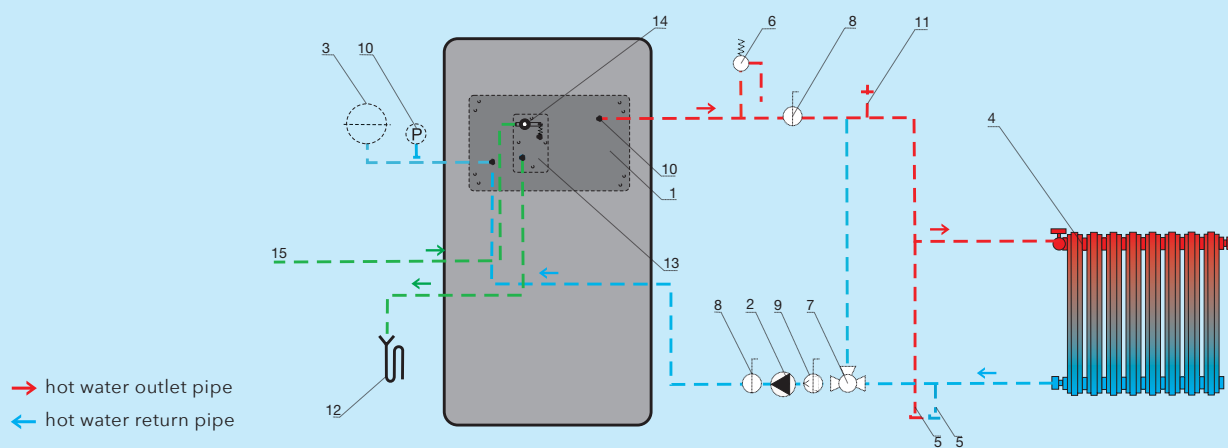

LEGEND:

- 1. exchanger
- 2. circulation pump
- 3. expansion tank
- 4. radiator
- 5. release vent

- 6. pressure relief valve
- 7. thermo-regulation valve, e.g. ESBE TV 25 (60-75 °C)
- 8. ball shut-off valve
- 9. BALL closing filter
- 10. pressure gauge

- 11. ventilation valve
- 12. waste
- 13. cooling exchanger (loop)
- 14. relief heat valve
- 15. connected to cold water line



PREMIUM

FARUM

Highlights



Automatic primary combustion air regulator
prevents problems during power outages



Replaceable exchanger
option of replacing the exchanger with a dummy plug



Cooling loop
protection from exchanger overheating



External combustion air supply
ideal for low-energy houses



COOLING LOOP
(not included)
0432317006108





NEW




FARUM
black, Woodstone Prestige
0433437000000



FARUM
black, Speckstein
0433437100000

Capacity (in heaters)	5-14.9 kW (10.1 kW)
Efficiency	85% A⁺
Heating ability	max. 268 m ³
Dimensions h / w / d	1,217 / 624 / 632 mm
Weight	264 kg
Fuel consumption / h	4.1 kg
Chimney draught	12 Pa
Fuel	 33 cm 
 Ø 100 mm	 Ø 150 mm

Accessories you'll find on the end of the catalogue.

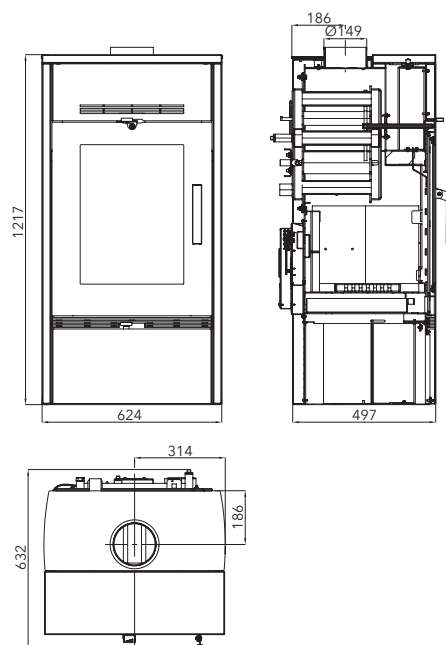

Natural stone - the colour/structure may differ.



PREMIUM



VISBY II

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss



Cooling loop

protection from exchanger overheating

Capacity (in heaters)	3.3-10.2 kW (7.8 kW)
Efficiency	79% A
Heating ability	max. 184 m ³
Dimensions h / w / d	1,012 / 524 / 523 mm
Weight	192 kg
Fuel consumption / h	3.1 kg
Chimney draught	11 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm


Accessories you'll find on the end of the catalogue.



VISBY II
black, Woodstone Prestige
0434517500000



COOLING LOOP
(not included)
0434515006108

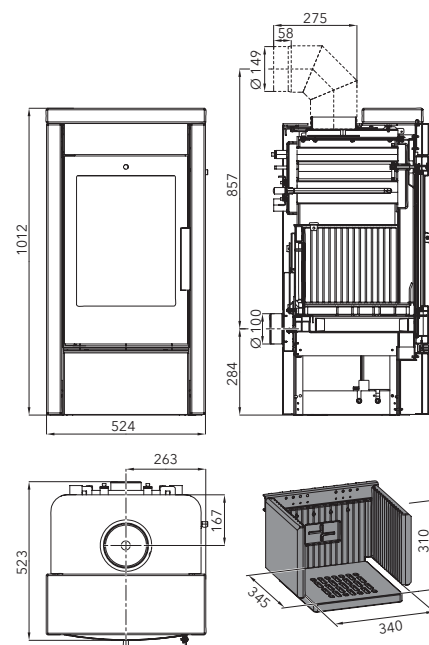

Natural stone – the colour/structure may differ.



FIREPLACES

real heat

YOUR BENEFITS

- + The thermal radiation will last longer thanks to heat accumulation
- + The fireplace kit can be painted individually
- + Optional fire protection kit Fireplaces - real heat

DESIGN YOUR OWN FIREPLACE!

A crackling, cosy open fire and pleasant heat in the room - enjoy the „luxury“ of your own fireplace. You can adapt our fireplace set so that the colour will match your living area.

EXAMPLE OF AN ASCIM CASING



Determine the fireplace location and mark its outline. (1)



Fit the fire protection on the fireplace insert (special accessory). (2)



Position the fireplace insert with a spirit level. (3)



Just follow the supplied guide and assemble all the parts. Fix them in place with the acrylic glue. (4 + 5)



We supply the enclosure in a raw state. You can coat it with any interior paint. (6)


Step by step (follow us on YouTube)

You Tube @haassohnrukov.s.r.o.




ADONIS II 
Page 42




LEVI 
Page 43



PINUS II 
Page 44




PINUS II CORNER 
Page 45




LEVI 
Page 46




PINUS AL 
Page 47



SKARA 
Page 48



NOVARA 17 with heat exchanger 
Page 49





PREMIUM







ADONIS II insert: Jonava IV

Highlights



External combustion air supply
ideal for low-energy houses

Capacity	3.9–8.3 kW	
Efficiency	80%	A
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,510 / 1,452 / 750 mm	
Weight	448 kg	
Fuel consumption / h	2.3 kg	
Chimney draught	12 Pa	
Fuel	 50 cm	
	 Ø 180 mm	 Ø 180 mm
 Ø 100 mm		

Accessories you'll find on the end of the catalogue.



ADONIS II
0601800620000

FIRE FIGHTING PROTECTION (not included) 0648000500000


Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection: min. 1,210 mm, chimney flue diameter 180 mm

Delivery on 2 pallets
(9 parts + hearth lining).

WOOD BOX (not included) 0658000510000

Option of adding
a wood bin.

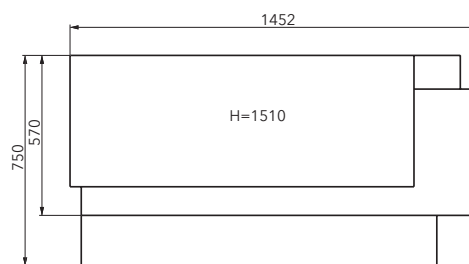

Illustrative photo = Lightweight concrete casing is delivered unpainted. Normally supplied without a wood bin.



PREMIUM



LEVI

Highlights



Tertiary combustion

air supply directly to the flame saves fuel



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



LEVI
structured décor, horizontal
0601880610000



LEVI
smooth décor
0601880600000










LEVI
structured décor, vertical
0601880620000


FIRE FIGHTING PROTECTION
(not included)
0641880140000



You can order a practical firewood storage area for the lower section. You may choose a „smooth décor“ or clean design for your firewood storage area.

Capacity	4–8.2 kW		
Efficiency	80% A⁺		
Heating ability	max. 147 m ³		
Dimensions h / w / d	1,811 / 760 / 447 mm		
Weight	320 kg		
Fuel consumption / h	2.5 kg		
Chimney draught	12 Pa		
Fuel	 50 cm  		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			

Accessories you'll find on the end of the catalogue.

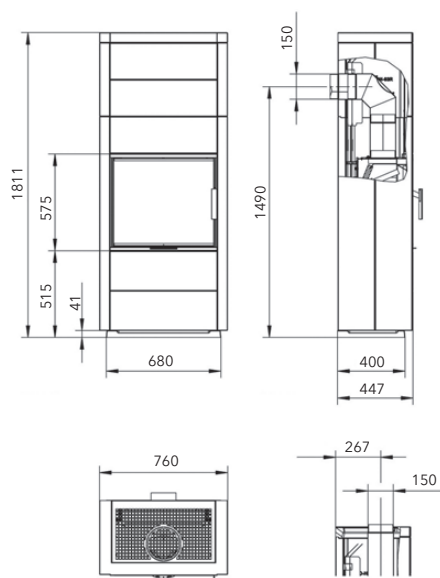

FIREPLACE SETS



PREMIUM



PINUS II insert: Pinus AL

Highlights



External combustion air supply
ideal for low-energy houses







Tertiary combustion
air supply directly to the flame saves fuel




Enamel technology



PINUS II*
0601871010000

Capacity	4–8.8 kW
Efficiency	80% A
Heating ability	max. 158 m ³
Dimensions h / w / d	1,380 / 1,058 / 406 mm
Weight	316 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	 33 cm
	 Ø 150 mm  Ø 150 mm
 Ø 100 mm	

Accessories you'll find on the end of the catalogue.

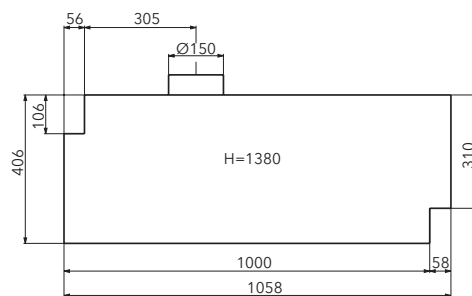

Recommended chimney flue connection:
min. 1,170 mm,
chimney flue diameter 150 mm.

Delivery on 2 pallets
(9 parts + hearth lining).

*Offer valid until stocks last.

Illustrative photo = Lightweight concrete casing is delivered unpainted.



PREMIUM

PINUS II CORNER insert: Pinus AL

Highlights



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel



Enamel technology

Capacity	4-8.8 kW
Efficiency	80% A
Heating ability	max. 158 m ³
Dimensions h / w / d	1,440 / 1,283 / 824 mm
Weight	286 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 150 mm Ø 150 mm
Ø 100 mm	


Accessories you'll find on the end of the catalogue.



PINUS II CORNER*
0601871100000



SET TO UPPER FLUE PIPE
(not included)
0655870100000

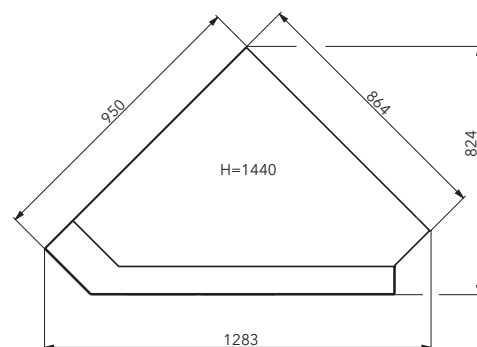

Recommended chimney flue connection:
min. 1,170 mm,
chimney flue diameter 150 mm.

Delivery on 2 pallets
(9 parts + hearth lining).

Illustrative photo = Lightweight concrete casing is delivered unpainted.

*Offer valid until stocks last.



PREMIUM



LEVI

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss



Tertiary combustion

air supply directly to the flame saves fuel

Capacity	4–8.2 kW
Efficiency	80% A⁺
Heating ability	max. 147 m ³
Dimensions h / w / d	641 / 644 / 408 mm
Weight	97 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	50 cm
	Ø 150 mm Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.




LEVI
black
0434715900000



WALL-IN FRAME
(not included)
black
0434715210400



ASSEMBLY PARTS LEVI
(not included)
black
0434715200450

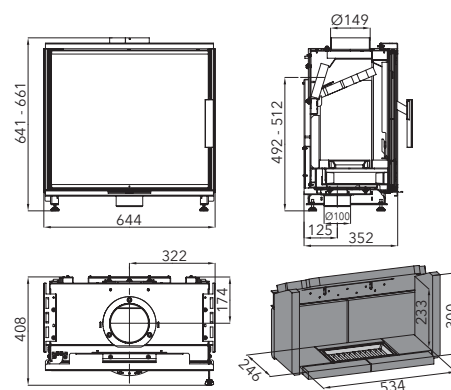



PREMIUM



PINUS AL

Highlights



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel







Enamel technology




PINUS AL*
black

0421817850000

Capacity	4–8.8 kW
Efficiency	80% A
Heating ability	max. 158 m ³
Dimensions h / w / d	1,299 / 500 / 358 mm
Weight	104 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	 33 cm
	 Ø 150 mm  Ø 150 mm
 Ø 100 mm	

Accessories you'll find on the end of the catalogue.

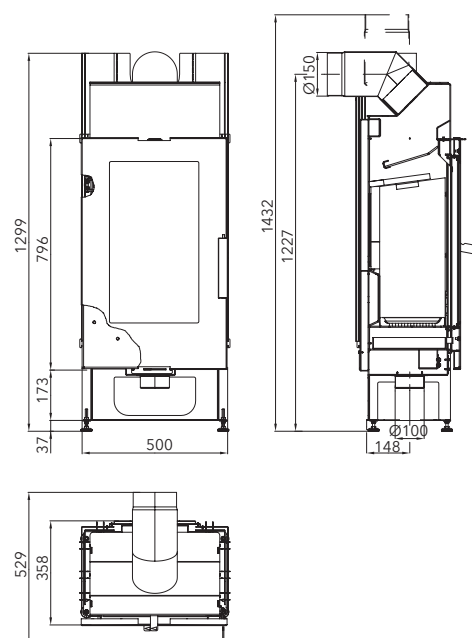

FIREPLACE INSERTS



PREMIUM



SKARA

Highlights



Closable external air intake
central air intake closing system – no heat loss



Easy control
Easy control air inlet regulation – easy air supply regulation
control with just one regulator



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3–7 kW
Efficiency	82% A⁺
Heating ability	max. 126 m ³
Dimensions h / w / d	890 / 630 / 341 mm
Weight	88 kg
Fuel consumption / h	2 kg
Chimney draught	11 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.



SKARA
black,
left – glass outside, concrete
0633015300000




SKARA
black,
right – glass outside, concrete
0633015200000



LEFT SKARA FRAME
(not included)
0633015101300



RIGHT SKARA FRAME
(not included)
0633015001300

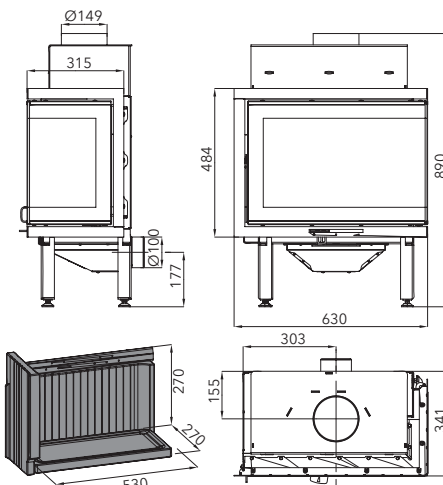



PREMIUM



NOVARA 17 WITH HEAT EXCHANGER

Highlights



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages







Cooling loop
protection from
exchanger overheating




Replaceable exchanger
option of replacing the
exchanger with a dummy plug



NOVARA 17*
anthracite
0618018170000

Capacity (in heaters)	5.2-17.4 kW (10.8 kW)
Efficiency	90% A⁺
Heating ability	max. 314 m ³
Dimensions h / w / d	1,720 / 778 / 566 mm
Weight	283 kg
Fuel consumption / h	4.5 kg
Chimney draught	12 Pa
Fuel	 50 cm
	 Ø 180 mm  Ø 180 mm
 Ø 120 mm	

Accessories you'll find on the end of the catalogue.

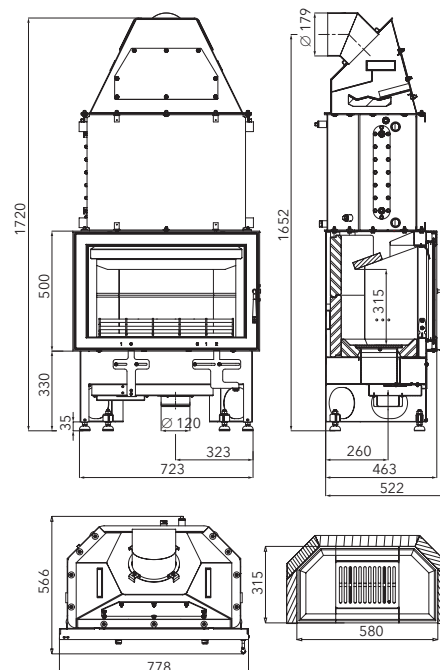

FIREPLACE INSERTS

*Offer valid until stocks last.

HEAT EXCHANGERS, CAPS, COOLING LOOPS

HEAT
EXCHANGERS**ANDRUS
FARUM**

Order nr. 0432317006101

**NIVALA**

0432317001105

**NOVARA**

0618018073200

HEAT
EXCHANGERS**TREVISIO**

Order nr. 0332015006100

**VESTRE
MARMA
ADRIA II**

0426837117000

**VESUVIO II
10 kW/1S,
12 kW/2S**

0619018156050

**VESUVIO II
13 kW/1S,
15 kW/2S**

0619018206050

**WERFEN 9**

0419018205050

**MATERA**

0435215005050



CAPS

**ANDRUS
FARUM**

Order nr. 0432317005700

**NIVALA**

0432317006700

**TREVISIO II**

0433900005000

**VESTRE
MARMA
ADRIA II**

0426817106011

**VESUVIO II**

0619018155150

**WERFEN 9**

0619018155150

MATERA

0435215005060

COOLING
LOOP**ANDRUS
FARUM
NIVALA**

Obj. č. 0432317006108

**ADRIA II
MARMA
VESTRE
BERGAMO**

0436819005019

**TREVISIO
TREVISIO II**

0332015005029

**ALMO
ALYTUS
AVESTA
BRYNE
SAVONA
VISBY**

0434515006108

**VESUVIO II**

0619018156017

**WERFEN 9
MATERA**

0419018155018

FLUE PIPES FOR FIREPLACE STOVES – SHEET METAL THICKNESS 1.5 MM

	GAS PIPE	Ø 120 mm	Ø 120 mm	Ø 120 mm		Ø 160 mm	Ø 180 mm
	Lenght	250 mm	500 mm	1000 mm		250 mm	250 mm
	Order nr. anthracite	1101122520000	1101125020000	1101129920000		-	-
	Order nr. black	-	-	-		1101162510000	1101182510000
	GAS PIPE	Ø 130 mm	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm	Ø 150 mm
	Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
	Order nr. anthracite	1101132520000	1101135020000	1101139920000	1101152520000	1101155020000	1101159920000
	Order nr. black	1101132510000	1101135010000	1101139910000	1101152510000	1101155010000	1101159910000
	GGAS PIPE WITH BUTTERFLY VALVE	Ø 130 mm	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm	Ø 150 mm
	Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
	Order nr. anthracite	1101132620000	1101135120000	1101139820000	1101152620000	1101155120000	1101159820000
	Order nr. black	1101132610000	1101135110000	1101139810000	1101152610000	1101155110000	1101159810000
	GAS PIPE WITH CLEANING APERTURE	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm		
	Lenght	500 mm	1000 mm	500 mm	1000 mm		
	Order nr. anthracite	1101135220000	1101139720000	1101155220000	1101159720000		
	Order nr. black	1101135210000	1101139710000	1101155210000	1101159710000		

ELBOWS AND SOCKETS FOR FIREPLACE STOVES – SHEET METAL THICKNESS 1.5 MM

	GAS ELBOW	Ø 120 mm	Ø 130 mm	Ø 150 mm	Ø 160 mm	Ø 180 mm
	Order nr. anthracite	1103129010000	1103139020000	1103159020000	-	-
	Order nr. black	-	1103139010000	1103159010000	1103169010000	1103189010000
	TWO PIECE FLUE COLLAR	Ø 120 mm	Ø 130 mm	Ø 150 mm	Ø 160 mm	Ø 180 mm
	Order nr. anthracite	1105120120000	1105130120000	1105150120000	-	-
	Order nr. black	-	1105130110000	1105150110000	1105160110000	1105180110000
	GAS ELBOW WITH CLEANING APERTURE	Ø 130 mm	Ø 150 mm			
	Order nr. anthracite	1103139120000	1103159120000			
	Order nr. black	1103139110000	1103159110000			
	GAS ELBOW 45°	Ø 130 mm	Ø 150 mm			
	Order nr. anthracite	1103134520000	1103154520000			
	Order nr. black	1103134510000	1103154510000			

ADJUSTABLE ELBOWS – SHEET METAL THICKNESS 1.5 MM

	ORDER NR.	Ø 150 mm	Ø 160 mm	Ø 180 mm
	UNI adjust. elbow, cleaning hole 180 / 0-180° UNI 5 segments (1.5)			1101191800000
	Adjustable elbow 180 / 0-90° (1.5)			1101191810000
	Adjustable elbow 180 / 0-45° (1.5)			1101191820000
	UNI adjust. elbow, cleaning hole 160 / 0-180° UNI 5 segments (1.5)		1101191600000	
	Adjustable elbow 160 / 0-90° (1.5)		1101191610000	
	Adjustable elbow 160 / 0-45° (1.5)		1101191620000	
	UNI adjust. elbow, cleaning hole 150 / 0-180° UNI 5 segments (1.5)	1101191500000		
	Adjustable elbow 150 / 0-90° (1.5)	1101191510000		
	Adjustable elbow 150 / 0-45° (1.5)	1101191520000		






FLUE PIPES FOR PELLET STOVES

GAS PIPE	Ø 80 mm
Lenght	250 mm
Order nr. black	1101172500000

GAS PIPE	Ø 80 mm
Lenght	500 mm
Order nr. black	1101175000000

GAS PIPE	Ø 80 mm
Lenght	1000 mm
Order nr. black	1101171000000

SET 1	1000 + 500 mm
Order nr. black	1101172700000
(pipe 1 m; pipe 0.5 m; pipe 0.25 m; elbow 90°; T-piece; condensation plug; 2 clamps)	

	T-PIECE	Ø 80 mm, 90°
	Order nr. black	1101172610000
	CONDENSATION PLUG	
	Order nr. black	1101172620000
	SEAL	
	Order nr. green	1101172630000
	CLAMP	
	Order nr. black	1101172640000
	ELBOW	Ø 80 mm
	Order nr. black	1101172600000

SET 2	1000 mm
Order nr. black	1101172750000
(pipe 1 m; pipe 0.25 m; elbow 90°; T-piece; condensation plug; 2 clamps)	

LOG BASKETS

	ANGULAR LITTER BIN
LOG BASKETS	
Dimensions	35 x 46 x 30 cm
Colour	black
Order nr.	1116002700000


	MIDDLE BASKET
Dimensions	40 x 24 x 36 cm
Colour	black, wood
Order nr.	1116002500000

	OVAL BASKET
Dimensions	46 x 22 x 32 cm
Colour	black, wood
Order nr.	1116002400000

	BASKET BIG (WITHOUT / WITH INSTRUMENTS)
Dimensions	68 x 48 x 45 / 70 x 49 x 46 cm
Colour	black, wood
Order nr.	1116002600000 / 1116001600000

	BASKET DERBY (WITH INSTRUMENTS)
Dimensions	68 x 48 x 45 cm
Colour	black, wood
Order nr.	1116003000000

FIREPLACE TOOLS

	BAU IV - THREE-PIECE
FIREPLACE TOOLS	
Dimensions	58 x 20 x 20 cm
Colour	black, wood
Order nr.	1116002200000



REPAIRING SPRAYS

REPAIRING SPRAY	COLOUR BLACK	COLOUR ANTHRACITE	COLOUR SILVER
Volume	400 ml	400 ml	400 ml
Order nr.	0070200050005	0070200020005	0070200040005


FIREPLACE STOVE GLASS FLOOR PLATES

MADE OF 6 MM THICK HARDENED GLASS




Elegant and safe


- ✚ 6 mm thick hardened glass with polished edge
- ✚ floor protection from scratches
- ✚ fire protection of flammable floors (e.g. wooden floors)




GLASS FLOOR PLATES - FORM "A"




GLASS FLOOR PLATES - FORM "A"



GLASS FLOOR PLATES - FORM "B"



GLASS FLOOR PLATES - FORM "C"



GLASS FLOOR PLATES - FORM A "D"

Dimensions 900 x 750 mm

Order nr. 1115409200000

Dimensions 1,000 x 1,000 mm

Order nr. 1115410200000

Dimensions 1,000 x 1,000 mm / 580 mm 45°


Order nr. 1115510200000

Dimensions 1,000 x 1,000 mm / R = 500 mm


Order nr. 1115910200000

Dimensions 1,000 x 1,000 mm

Order nr. 1115610200000



GLASS FLOOR PLATES - FORM "E"



GLASS FLOOR PLATES - FORM "F"

Dimensions 1,000 x 1000 mm / R = 800 mm

Order nr. 1115910300000

Dimensions 1,000 x 1,000 mm / R = 500 mm

Order nr. 1115910400000

ENERGY SAVING-DRAUGHT CONTROLLERS

Zugex H+S chimney draught regulator



Zugregler H+S chimney draught regulator



CONTROLLER

ZUGEX H+S 130

Order nr. 1120130110000

ZUGEX H+S 150

Order nr. 1120150110000

ZUGEX H+S 200

Order nr. 1120200110000

CONTROLLER

ZUGREGLER H+S 130

Order nr. 1120130010000

ZUGREGLER H+S 150

Order nr. 1120150010000

ZUGREGLER H+S 200

Order nr. 1120200010000

FLEXI HOSES FOR CONNECTION OF EXTERNAL AIR SUPPLY

HOSE TYPE	ORDER NR.
FLEXI HOSE FOR CPV 80/3 m	1101501000022
FLEXI HOSE FOR CPV 100/3 m	1101501000020
FLEXI HOSE FOR CPV 125/3 m	1101501000021

HOSE TYPE	ORDER NR.
FLEXI HOSE FOR CPV 80/3 m black lacquer	1101501000025
FLEXI HOSE FOR CPV 100/3 m black lacquer	1101501000023
FLEXI HOSE FOR CPV 125/3 m black lacquer	1101501000024










AL TAPE (120°C) TAD 50/50, BLACK (3128D)
Order nr. 0088500140000

STEEL HOSE CLAMP BLACK










Ø 80 mm Order nr. 0088500150000
 Ø 100 mm Order nr. 0088500160000
 Ø 120 mm Order nr. 0088500170000
 Ø 150 mm Order nr. 0088500180000

TECHNICAL PARAMETERS












PELLET STOVES

Page	Model									
10	HSP 4 PARMA	2.5-8.5	90	207	80		max. 153	1.9	32	12
11	HSP 4 PRATO	2.4-8.5	92	184	80		max. 153	1.9	17	12
12	HSP 6 RUEDA RLU	2.4-8.3	90	122		80	max. 149	1.9	32	11
13	HSP 6 RUEDA C RLU	2.4-8.3	90	163		80	max. 149	1.9	32	11
14	HSP 6 TOLEDO IV 32	2.4-8.3	90	118		80	max. 149	1.9	32	11
15	HSP 7 II	2.4-8.2	90	126		80	max. 148	1.9	12	12
16	HSP 7 II GRANDE RLU	2.4-8.2	90	132		80	max. 148	1.9	17	12
17	HSP 7 II GRANDE RLU DE LUXE	2.4-8.2	90	132		80	max. 148	1.9	17	12
18	HSP VIANO	2.4-8.6	90	99		80	max. 155	2.0	17	11











FIREPLACE STOVES WITH HEAT EXCHANGER

Page	Model									
21	HSP 6 WITH HEAT EXCHANGER	3.2-10.9 (6.8)	93	178		80	max. 196	2.41	32	12













FIREPLACE STOVES

Page	Model											
24	BRILLO	3.4-6.7	81	149	33 cm	150	150	max. 120	2			12
26	DALE	4.1-8.2	80	153	50 cm	150	150	max. 147	2.5	•	•	12
27	DALE WITH AN OVEN	4-8.1	88	231	50 cm	150		max. 146	2.2			12
28	EPIC	3.4-6.7	81	134/190	33 cm	150	150	max. 120	2			12
29	FENIX	3.4-6.7	81	134	33 cm	150	150	max. 120	2			12
30	HERBORN II	3-6.4	82	116	33 cm	150	150	max. 115	1.6			12
31	MOLDE	3-6.4	81	233	33 cm	150	150	max. 115	1.9			11
32	OVALIS (GRANDE / PICCOLO)	2.5-5.3	81	127 / 117	30 cm	150	150	max. 95	1.5			12
33	PINEROLO (Woodstone / Speckstein)	3-6.4	82	179 / 208	33 cm	150	150	max. 115	1.5			12
34	PISA RLU	2.6-5.4	87	122	33 cm	150	150	max. 97	1.2			12













FIREPLACE STOVES WITH HEAT EXCHANGER

Page	Model											
38	FARUM WITH HEAT EXCHANGER	5-14.9 (10.1)	85	264	33 cm	150		max. 268	4.1	•	•	12
39	VISBY II WITH HEAT EXCHANGER	3.3-10.2 (7.8)	79	192	33 cm	150		max. 184	3.1			11













FIREPLACE SETS

Page	Model												
42	ADONIS II	3.9-8.3	80	448	50 cm	180	180	max. 149	2.3	678 × 400			12
43	LEVI	4-8.2	80	320	50 cm	150	150	max. 147	2.5		•	•	12
44	PINUS II	4-8.8	80	316	33 cm	150	150	max. 158	2.2	340 × 583	•		12
45	PINUS II CORNER	4-8.8	80	286	33 cm	150	150	max. 158	2.2	340 × 583	•		12

FIREPLACE INSERTS

Page	Model												
46	LEVI	4-8.2	80	97	50 cm	150	150	max. 147	2.5		•	•	12
47	PINUS AL	4-8.8	80	104	33 cm	150	150	max. 158	2.2	583 × 340	•		12
48	SKARA	3-7	82	88	50 cm	150		max. 126	2.0				11

FIREPLACE INSERTS WITH HEAT EXCHANGER

Page	Model												
49	NOVARA 17 WITH HEAT EXCHANGER	5.2-17.4 (10.8)	90	283	50 cm	180	180	max. 314	4.5	678 × 400			12

EXPLANATORY NOTES



Capacity (kW)



Efficiency (%)



Weight (kg)



Top flue-gas outlet (Ø mm)



Rear flue-gas outlet (Ø mm)



Lump wood
(max. length in cm)



Environment friendly
pressed fuel



Brown-coal briquettes



Heating ability (m³)



Fuel consumption (kg/h)



Chimney draught (Pa)



Volume of pellet
container (kg)



Dimensions of glass
w × d (mm)

QUALITY TIMES

with our stove

HAAS+SOHN

@haassohnrukov

HAAS+SOHN RUKOV s. r. o.

Nádražní 260
407 56 Jiřetín pod Jedlovou
Czech Republic

Phone: +420 412 510 101

prodej@haassohn.com
www.haassohn-rukov.com



Your HAAS+SOHN dealer: