

QUALITY TIMES  
*with our stove*



PREMIUM

25

26





QUALITY TIMES  
*with our stove*

# CONTENT



## SERVICE

Your service - plus	4
Pictogram overview Highlights /	5
Explanatory notes	5

## PELLET STOVES

Produkt Highlights	7
Pellet stoves	9

## PELLET STOVES WITH HEAT EXCHANGER

Produkt Highlights	19
Pellet stoves with heat exchanger	21



## FIREPLACE STOVES


Produkt Highlights	22
Fireplace stoves	23

## FIREPLACE STOVES WITH HEAT EXCHANGER

Produkt Highlights	34
Fireplace stoves with heat exchanger	36

## FIREPLACE SETS

Example of an ascim casing	39
Fireplace sets	40



## FIREPLACE INSERTS

Fireplace inserts	43
-------------------	----

## ACCESSORIES

Heat exchangers, caps, cooling loops	46
Flue pipes for fireplace stoves	47
Flue pipes for pellet stoves	48
Log baskets, fireplace tools, repairing sprays, cleaning spray	49
Glass floor plates, flexi hoses	49

Technical parameters	50
----------------------	----

[www.haassohn-rukov.com](http://www.haassohn-rukov.com)

Visit us also on







ECODESIGN 2022

## FORWARD-THINKING

Fire always works the same. You need the right amount of air in the right place. At HAAS+SOHN, we can ensure that. Air supply affects stove emissions and fuel consumption. A clean environment is important to us and our children. Therefore, our stoves have multiple air inlets distributed and regulated so that combustion is always as efficient and clean as possible. Since 2018, all our products have complied with the EU's ECODESIGN 2022 regulations and have prominently displayed their energy class markings. You will always find this information on each stove in the form of an energy label.



YOUR SERVICE - PLUS

### OUR PROMISE

We are committed to making sure that you can still enjoy your stove even after 15 years have passed. That's why we will still be within reach after you heat up your stove for the first time. Do you need advice? Or is your stove not working the way it should? Write to us at [poradna@haassohn.com](mailto:poradna@haassohn.com). We are here to help, no matter how old your stove is.



QUALITY TIMES  
*with our stove*



## PICTOGRAM OVERVIEW



**Fast heating of air in the room**



**Replaceable exchanger**

option of replacing the exchanger with a dummy plug



**Automatic secondary air control**

easy and convenient control



**Double-Air function – can heat 2 rooms at the same time**



**Cooling loop**

protection from exchanger overheating



**Automatic door closing**

just release the door and it closes on its own



**Colour touch screen and integrated WLAN module**



**Heat exchanger cleaning**

simple and clean



**WLAN**

optional feature WLAN Local & Global



**Simple operation using a mobile app**



**Tertiary combustion**

air supply directly to the flame saves fuel



**Fully automatic temperature control**

the optimum room temperature exactly when you need it



**Gas tightness certified**

does not require air from the room for combustion



**Heat accumulation**

for long-term radiation of heat



**Friendly for allergic persons**



**Easy control**

Easy control air inlet regulation – easy air supply regulation control with just one regulator



**External combustion air supply**

ideal for low-energy houses



**Large glazed area**



**Closable external air intake**

central air intake closing system – no heat loss



**Automatic primary combustion air regulator**

prevents problems during power outages



**Enamel technology**



The icon in the catalogue that identifies stoves suitable for low-energy houses. It provides quick orientation when choosing low-output stoves with external air intake, suitable for low-energy and passive houses.



## EXPLANATORY NOTES



Rear flue-gas outlet (Ø mm)



Weight (kg)



Pellets



Top flue-gas outlet (Ø mm)



Chimney draught (Pa)



Lump wood (max. length in cm)



Back external combustion air supply (Ø mm)



Environment friendly pressed fuel



Lower external combustion air supply (Ø mm)



Brown-coal briquettes

### Heating capacity:

It is determined based on applicable standards and the specific annual energy consumption of a typical low-energy house with the room height of 2.5 m built between 2002 and 2008. You must remember that the annual energy consumption depends on many factors such as the room height, age and condition of the masonry and insulation, the window area, house orientation, temperature differences and other aspects. The value can vary.





MONTHS OF  
WARRANTY



*Your benefit*

## EXTENDED WARRANTY

How to get an extra year of service for free? With our warranty extended to 36 months. Simply **register in the HAAS+SOHN smartphone application** (see the QR codes below) **within four weeks of purchase**. Under the extended warranty, **you will have all warranty repairs free of charge, without paying for spare parts or service technicians' work**.

**The extended warranty can be used after the legal warranty's expiration.**

### HAAS+SOHN APP



Android



iOS





## Your benefit

### INTELLIGENT AND COMFORTABLE

- + new, simple operation concept
- + simple use
- + fully automatic temperature control
- + energy-efficient heating
- + extremely silent operation
- + suitable for allergic persons
- + easy to clean
- + lowest energy consumption: only 30-50 W/h, only 9 W/h in the standby mode



HAAS+SOHN  
APP

COMFORTABLE  
CONTROL FROM  
A SMARTPHONE

Available on the  
App Store

GET IT ON  
Google play



## WHY ARE PELLET STOVES A GOOD CHOICE?

Who better to tell you more about the benefits of pellet stoves than the users themselves.

### What are the most frequently mentioned benefits?

**Heating without work and chopping wood** - „I simply press a button and start heating.“ „I have a lot of work building the house and I am glad that I don't need to also chop wood.“

**Clean and dust-free** - „My wife and children suffer from asthma and allergies. We sought a suitable heating system that would at the same time give us a traditional view of the fire. A pellet stove is a clear choice.“ „I did not want to turn my living room into a boiler room.“

**Simple operation** - „It can be operated easily, even by my wife and small children. I work long hours, and for this reason we sought a heating method which even a woman in the household can cope with. She need not carry a heavy basket of wood.“ „I can set the automatic operating mode and the stove automatically switches itself on and off.“

**Simple control via the smart phone application** - „I appreciate simple control via a smart phone. I can check the heating conditions at home even when I am out.“ „I can fire up the stove via my smart phone when I am on my way home from work and my home is already warm when I arrive.“

**Safety thanks to inbuilt sensors and detectors** - „The stove monitors the set temperature, thus precluding overheating.“ „We have a pellet stove with an exchanger, which easily heats the entire house. The stove automatically switches off when it runs out of fuel or the power fails.“

**Easy maintenance** - „Maintenance is really easy and it generates minimal ash. I subsequently use the ash on the garden in the greenhouse.“ „I need not clean the firebox and remove the ash everyday, which is a great comfort.“

**Quality times** - „A beautiful accessory for the interior, we like the view of the flames. Moreover, a quality pellet stove gives out the fragrance of wood.“ „The quality workmanship of the stove, the feeling we get from the view of the open flames, truly romantic.“

simple

effective

heating

## Comfortable, efficient and ecological heating!



# PELLET STOVE CONTROL

## USING SMART TECHNOLOGY FROM HAAS+SOHN



### Pellet stoves with WLAN module Obeying at a distance

For your comfort and freedom. With the stove control through a mobile phone you can control the warmth of your home wherever you are. Just connect the WLAN module with two functions to your stove:

- ✦ Local Function 🏠 - for control at home and its vicinity (garden, garage)
- ✦ Global Function 🌐 - or control from any place in the world

The stove connects to the home Wi-Fi through the WLAN module. If the Wi-Fi network is not available or the connection fails, the module will create its own hotspot. In such case only the Local Function is active. You just need to connect once for long-term use QUALITY TIMES.



### HAAS+SOHN Application Comfortable control from a smartphone

Download your HAAS+SOHN application for free and start controlling your pellet stove. Simply, safely and comfortably.

- ✦ Optional for-set weekly program, up to 3 time intervals for 1 day
- ✦ Up to 5 family members can control one stove
- ✦ Up to 5 pellet stoves can be connected to one application
- ✦ The colour background of the application shows the operational mode of the stove (red - heating, blue - cooling, purple - switching off, green - ECO-Mode, grey - switched off)
- ✦ The application will remind you to add fuel, clean the stove or order a service
- ✦ It monitors average fuel consumption



### Simple control

Comfortable and simple control with just four pushbuttons. Display with a well-arranged menu.



### Large glazed area

You won't recognise that it is a pellet stove. The flame looks as if logs were burning inside.



### Friendly for allergic persons thanks to the heat exchanger

Heated air is not blown into the room by a fan. The heat rises on its own, without vibrations or noise. You can fall asleep next to our pellet stove, breathing comfortably. Ideal for allergic persons.



### Extremely quiet operation

You will barely hear the stove working.



### Fully automatic temperature control

Simply set different temperatures for different times of the day. With an integrated room temperature sensor, the stove monitors the temperature in the room and heats to maintain the pre-set value. The pellet stove will recognise a temperature drop in the room and it will start heating it up. When it reaches the required temperature, it will reduce its output. There's no need to switch it on or off, just add pellets.




### Gas tightness certified

A pellet stove with a gas tightness certificate complying with the NF EN 14785 standard. An ideal choice for low-energy, passive and thermally insulated houses. Blower-door test compliant. The stove draws 100% of the air needed for combustion from outside (external CPV intake). Thanks to this feature the combustion process is fully independent of the air in the room and the fire does not use oxygen in the house. If you are not using the stove, heat is not drawn out of the room.




### HAAS+SOHN Application Comfortable control from a smartphone

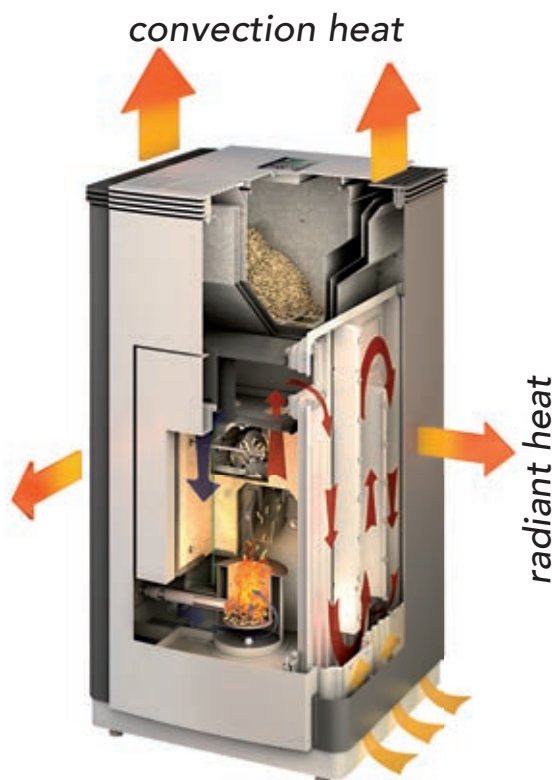






HSP 4 PARMA   
Page 10



HSP 4 PRATO   
Page 11



HSP 6 RUEDA RLU   
Page 12




HSP 6 RUEDA C RLU   
Page 13



HSP 6 TOLEDO IV 32   
Page 14




HSP 7 II   
Page 15



HSP 7 II GRANDE RLU   
Page 16



HSP 7 II GRANDE RLU  
DE LUXE   
Page 17



HSP VIANO   
Page 18



PREMIUM



## HSP 4 PARMA

Highlights



Fast heating of air in the room



Colour touch screen and integrated WLAN module






**WLAN**

optional feature WLAN  Local &  Global



**Double-Air function** - can heat 2 rooms at the same time



Capacity	2.5–8.5 kW	
Efficiency	90%	<b>A++</b>
Heating ability	max. 153 m <sup>3</sup>	
Dimensions h / w / d	1,208 / 563 / 578 mm	
Weight	207 kg	
Fuel consumption / h	1.9 kg	
Volume of pellet container	32 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm		 Ø 80 mm

Accessories you'll find on the end of the catalogue.



**HSP 4 PARMA**  
white

0545508540000



**HSP 4 PARMA**  
glossy black


0545508510000



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove

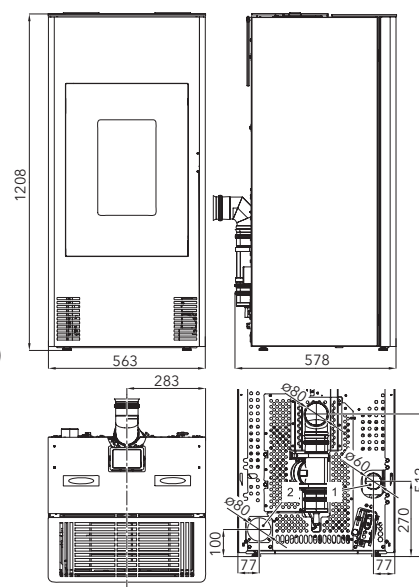





PREMIUM

## HSP 4 PRATO

Highlights



Fast heating of air in the room



Colour touch screen and integrated WLAN module



Simple operation using a mobile app



Double-Air function - can heat 2 rooms at the same time



Capacity	2.4-8.5 kW
Efficiency	92% <b>A++</b>
Heating ability	max. 153 m <sup>3</sup>
Dimensions h / w / d	1,210 / 540 / 556 mm
Weight	184 kg
Fuel consumption / h	1.9 kg
Volume of pellet container	17 kg
Chimney draught	12 Pa
Fuel	
	Ø 60 mm
	Ø 80 mm

Accessories you'll find on the end of the catalogue



**HSP 4 PRATO**  
glossy black  
0545908510000




**HSP 4 PRATO**  
white  
0545908540000



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove

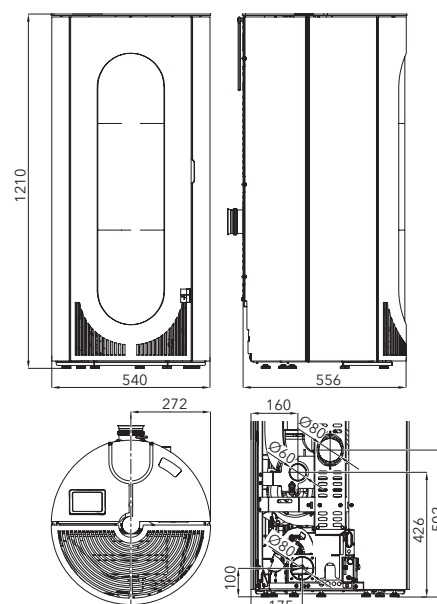

PELLET STOVES



PREMIUM



## HSP 6 RUEDA RLU

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it






### Gas tightness certified

does not require air from the room for combustion



### Large glazed area



Capacity	2.4-8.3 kW	
Efficiency	90% <b>A<sup>+</sup></b>	
Heating ability	max. 149 m <sup>3</sup>	
Dimensions h / w / d	1,201 / 550 / 500 mm	
Weight	122 kg	
Fuel consumption / h	1.94 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.



**HSP 6 RUEDA RLU**  
anthracite, black ledges  
0546532810000




**HSP 6 RUEDA RLU**  
anthracite, white ledges  
0546532830000



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove

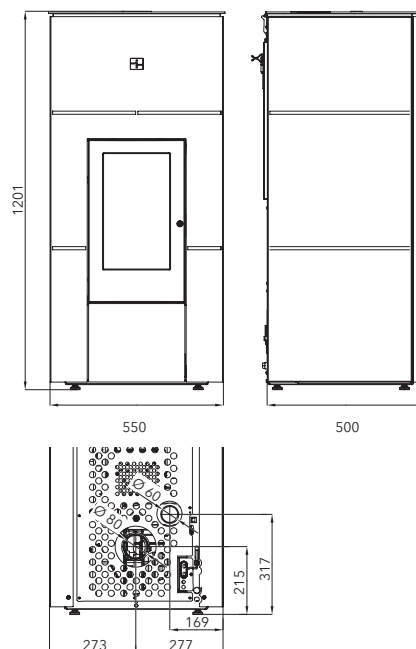





PREMIUM



## HSP 6 RUEDA C RLU

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it






### Gas tightness certified

does not require air from the room for combustion



### Large glazed area



Capacity	2.4–8.3 kW	
Efficiency	90%	A <sup>+</sup>
Heating ability	max. 149 m <sup>3</sup>	
Dimensions h / w / d	1,201 / 560 / 513 mm	
Weight	163 kg	
Fuel consumption / h	1.94 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	





### ROOM TEMPERATURE SENSOR

cable 8 m (not included)

0532007010000



WLAN MODUL  
is part of the stove

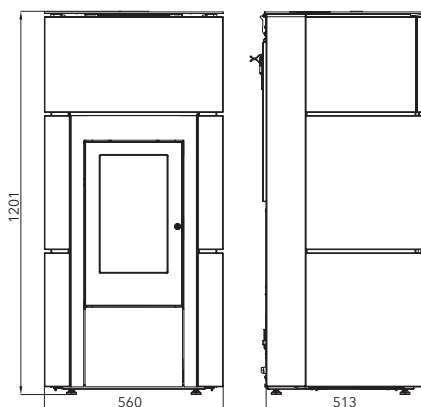

Tile – the colour may differ, or may contain hair cracks.



**HSP 6 RUEDA C RLU**  
anthracite, metallic tiles  
0546532750000



**HSP 6 RUEDA C RLU**  
anthracite, white tiles  
0546532760000



**HSP 6 RUEDA C RLU**  
anthracite, red patina tile\*  
0546532770000

\*Offer valid until stocks last.

PELLET STOVES



PREMIUM

## HSP 6 TOLEDO IV 32

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it






### Friendly for allergic persons



### Large glazed area



Capacity	2,4–8,3 kW	
Efficiency	90% <b>A<sup>+</sup></b>	
Heating ability	max. 149 m <sup>3</sup>	
Dimensions h / w / d	1,201 / 544 / 499 mm	
Weight	118 kg	
Fuel consumption / h	1.9 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue



**HSP 6 TOLEDO IV 32**

anthracite, grey

0543408670000




### ROOM TEMPERATURE SENSOR

cable 8 m (not included)

0532007010000



WLAN MODUL  
is part of the stove

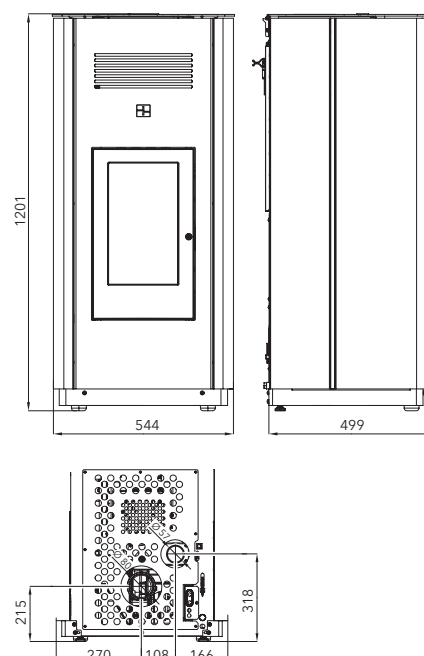





PREMIUM

## HSP 7 II

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it






### Large glazed area



### Friendly for allergic persons



Capacity	2.4–8.2 kW	
Efficiency	90% <b>A<sup>+</sup></b>	
Heating ability	max. 148 m <sup>3</sup>	
Dimensions h / w / d	1,053 / 494 / 494 mm	
Weight	126 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	12 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.




**HSP 7 II**  
black  
0545008580000



**ROOM TEMPERATURE  
SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove

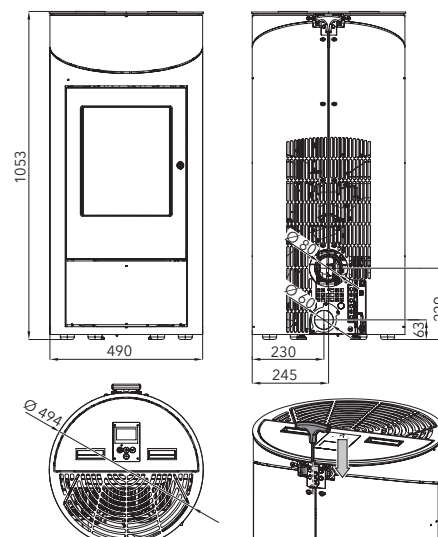

PELLET STOVES



PREMIUM



## HSP 7 II GRANDE RLU

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it



### Gas tightness certified

does not require air from the room for combustion



### Large glazed area



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove



Capacity	2.4–8.2 kW
Efficiency	90% <b>A<sup>+</sup></b>
Heating ability	max. 148 m <sup>3</sup>
Dimensions h / w / d	1,173 / 494 / 494 mm
Weight	132 kg
Fuel consumption / h	1.87 kg
Volume of pellet container	17 kg
Chimney draught	12 Pa
Fuel	
Ø 60 mm	Ø 80 mm

Accessories you'll find on the end of the catalogue.




**HSP 7 II GRANDE RLU**  
black  
0545108510000



**HSP 7 II GRANDE RLU**  
white komaxit  
0545108520000



**HSP 7 II GRANDE RLU**  
grey  
0545108500000

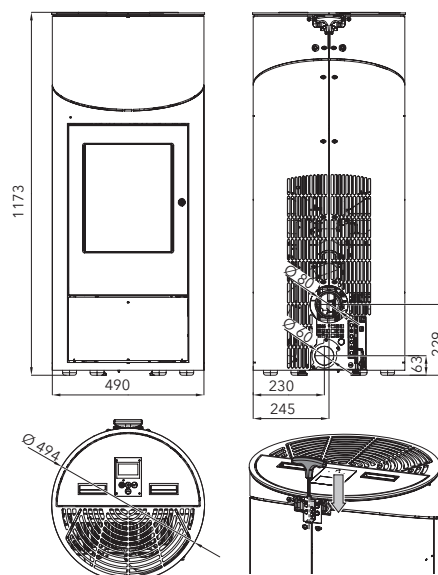





PREMIUM



## HSP 7 II GRANDE RLU DE LUXE

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it

RLU




### Gas tightness certified

does not require air from the room for combustion



### Large glazed area



Capacity	2.4–8.2 kW	
Efficiency	90% <b>A<sup>+</sup></b>	
Heating ability	max. 148 m <sup>3</sup>	
Dimensions h / w / d	1,173 / 494 / 494 mm	
Weight	132 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	17 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.



**HSP 7 II GRANDE RLU DE LUXE**  
red  
0545108570000




**HSP 7 II GRANDE RLU DE LUXE**  
glossy grey  
0545108600000



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove

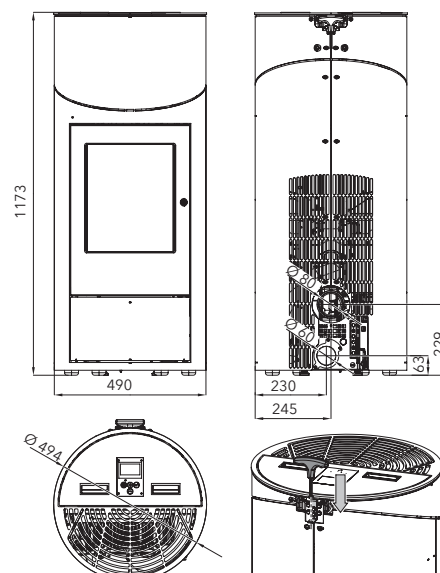

PELLET STOVES



PREMIUM



## HSP VIANO

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it






### Friendly for allergic persons



### Large glazed area



Capacity	2.4-8.6 kW	
Efficiency	90%	A <sup>+</sup>
Heating ability	max. 155 m <sup>3</sup>	
Dimensions h / w / d	963 / 522 / 524 mm	
Weight	99 kg	
Fuel consumption / h	1.99 kg	
Volume of pellet container	17 kg	
Chimney draught	11 Pa	
Fuel		
 Ø 40 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.






**HSP VIANO**  
anthracite, black  
0571307520000



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000



**WLAN MODUL**  
is part of the stove







HSP 6   
with heat exchanger  
Page 21



# PELLET STOVES WITH HEAT EXCHANGER

*smart heating*



## Smart heating with HAAS+SOHN

Enjoy heat from pellets throughout your house. The pellet stove with exchanger is connected to your central heating system and heats up the water in the radiators. You can use the control panel to simply adjust how much heat the stove transfers to the central heating system and how much heat is to be transferred directly to the air in your room. The stove monitors the pre-set temperature automatically and you can control it remotely using your mobile application. You do not need to chop wood for this pellet stove with exchanger. Just refill with pellets once every three days. The stove can be used as the main source of heat and it is great for transition periods (autumn, spring). Using pellets for your heating system will save you money in comparison with systems using direct heaters or electric boilers.

- ✚ direct room heating
- ✚ indirect heating of other rooms
- ✚ an economical and additional source of heat, great for transition periods
- ✚ 50% lower costs when compared with electric heating systems
- ✚ can be controlled from anywhere thanks to the mobile application



## Exchanger

Transfers heat from the stove to your heating system. Up to 79% of the heat produced by the stove can be used to heat up the water in your system while the rest heats the air in the room. A pellet stove with a heat exchanger will heat your house or it can be used to heat up water for showering. It can be combined with solar panels, gas boilers or solid fuel boilers.

**Notice:** Pellet stoves with a heat exchanger cannot be used without being connected to your heating system (central heating system) The connection must be done by a professional company.



## Patented heat exchanger cleaning technology

You can even clean the exchanger with the door closed. Clean the dirt from pipes by simply moving the wiping blade.


## Hydraulic module

All you need to connect your stove to your central heating system is available and ready in a single module inside your stove. It will save you space and money.

It consists of:

- ✚ circulation pump,
- ✚ safety valve,
- ✚ three-way valve,
- ✚ aerating valve.

Supplied with a rear or lower outlet (floor connection).

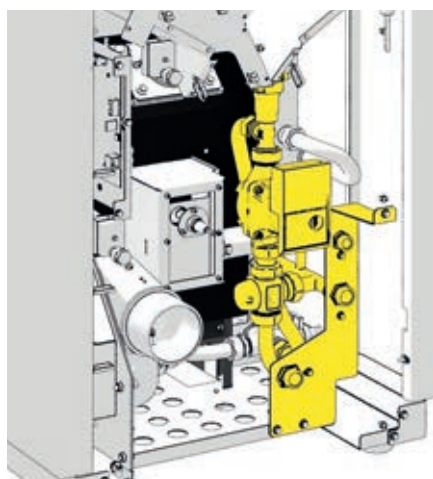





PREMIUM



## HSP 6 with heat exchanger

Highlights



### WLAN

optional feature WLAN 🏠 Local & 🌐 Global



### Fully automatic temperature control

the optimum room temperature exactly when you need it






### Heat exchanger cleaning

simple and clean



### Friendly for allergic persons



Capacity (in heaters)	3.2-10.9 kW (6.8 kW)	
Efficiency	93% <b>A++</b>	
Heating ability	max. 196 m³	
Dimensions h / w / d	1,200 / 545 / 498 mm	
Weight	178 kg	
Fuel consumption / h	2.41 kg	
Volume of pellet container	32 kg	
Chimney draught	12 Pa	
Fuel		
 Ø 60 mm	 Ø 80 mm	

Accessories you'll find on the end of the catalogue.



**WLAN MODUL**  
is part of the stove



**ROOM TEMPERATURE SENSOR**  
cable 8 m (not included)  
0532007010000




**HYDRAULIC MODULE**  
(not included)  
0553808214000



**HSP 6**  
anthracite, black  
0553808500000



**HSP 6**  
anthracite, white  
0553808510000

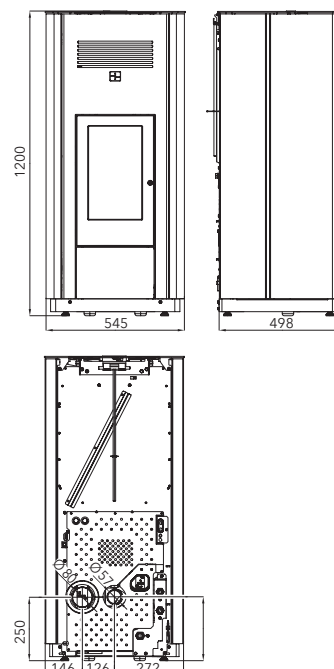

PELLET STOVES WITH HEAT EXCHANGER



# FIREPLACE STOVES

*economical + efficient*

## YOUR BENEFITS

- + simple and safe operation
- + low amount of soot thanks to new combustion technologies, low cleaning effort
- + lower contamination by particles
- + maximum heating cost saving
- + increased efficiency - more heat with less wood unobstructed view of the fire thanks to
- + continuous front glass clearing

## WOOD BURNING STOVES WITH MODERN TECHNOLOGY



### Easy Control Air regulation

Easy Control will help you heat properly. You can control the air supply (primary, secondary, tertiary) into the hearth with a single controller.



#### 1. Start

Press „Start“ for sufficient air supply to make a fire until it starts burning evenly.



#### 2. Heating

After starting the fire, turn the controller to the top „Burning“ position for clean and efficient combustion.



#### 3. Closing

When you decide to stop heating and the fire goes out, you can switch the controller to the „0“ position to keep the heat inside the room. Thanks to the closable air supply, the heat from the fireplace stove remains inside the room and you can enjoy it longer.



### Heat accumulation

For long-term radiation of heat. After 2 hours of operation the stove radiates heat for 10 more hours.

Optional accessory for the MOLDE, OVALIS and PISA RLU fireplace stove. New HAAS+SOHN accumulation set made of magnesite has double accumulation capacity than steatite.

You can add the accumulation set anytime later.  
The installation is very simple.



### External air supply (CPV)

Optional supply of air from outside. Inside you can breathe better because the stove doesn't burn air that has already been heated once. Ideal for houses with thermal insulation, necessary for passive and low-energy buildings.



### Gas tightness certified

A stove with a gas tightness certificate (issued by DIBt). An ideal choice for low-energy, passive and thermally insulated houses. Blower-door test compliant. The stove draws 100% of the air needed for combustion from outside (external CPV intake). Thanks to this feature, the combustion process is fully independent of the air in the room and the fire does not use the oxygen in the house. If you are not using the stove, the heat is not drawn out of the room via the stove. Therefore, the stove does not cause any heat loss.



### Automatic door closing

Just release the door and it closes on its own.



### Automatic secondary air control

The stove automatically controls the secondary air intake. Simply open the primary air intake before you start a fire. Once the fire starts burning you can close the primary air intake. The rest of the combustion process is controlled by the stove. Based on the available firewood, the stove adjusts the secondary air intake automatically to make sure that the combustion process is most efficient. This allows you to utilise the maximum amount of heat produced by each log while keeping emissions low.



NEW




BRILLO   
Page 24




DALE   
Page 26



DALE with an oven   
Page 27



EPIC   
Page 28



FENIX   
Page 29



MOLDE   
Page 30



OVALIS Grande   
Page 31



OVALIS Piccolo   
Page 31



PINEROLO   
Page 32



PISA RLU   
Page 33



PREMIUM



## BRILLO

### Highlights



#### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



#### External combustion air supply

ideal for low-energy houses



#### Automatic door closing

just release the door and it closes on its own



#### Gas tightness certified

does not require air from the room for combustion






new




**BRILLO**  
black / ivory  
0435315500000



**COVER CAP**  
(included)

Capacity	3.4–6.7 kW		
Efficiency	81 %		<b>A<sup>+</sup></b>
Heating ability	max. 120 m <sup>3</sup>		
Dimensions h / w / d	1221 / 523 / 383 mm		
Weight	149 kg		
Fuel consumption / h	2 kg		
Chimney draught	12 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			

Accessories you'll find on the end of the catalogue.

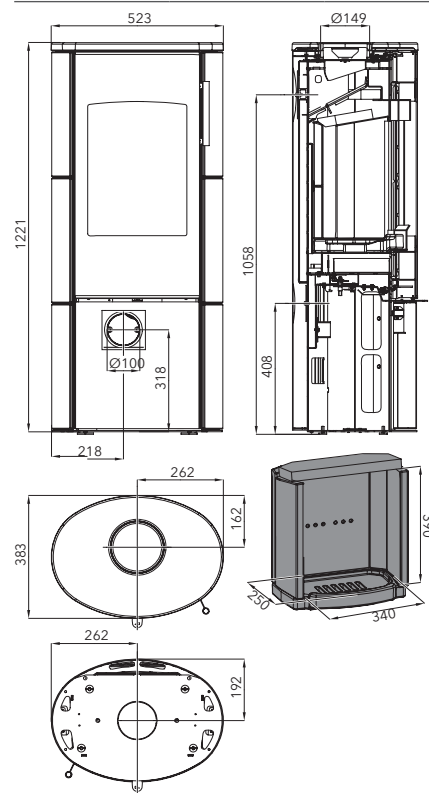



## BETTER THAN TV

Watching the flames never gets old.

From the earliest times people have gathered around a fireplace, and this need has survived until the present day. The stoves are no longer only used for heating but also to evoke an atmosphere. Thanks to the fireplace stove, you perceive "different" heat and enjoy GREAT MOMENTS.

## QUALITY TIMES

*with our stove*







PREMIUM



## DALE

Highlights



### Tertiary combustion

air supply directly to the flame saves fuel



### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator










### External combustion air supply

ideal for low-energy houses



### Closable external air intake

central air intake closing system – no heat loss

Capacity	4.1-8.2 kW	
Efficiency	80% <b>A<sup>+</sup></b>	
Heating ability	max. 147 m <sup>3</sup>	
Dimensions h / w / d	872 / 777 / 452 mm	
Weight	153 kg	
Fuel consumption / h	2.5 kg	
Chimney draught	12 Pa	
Fuel	 50 cm  	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm
 Ø 100 mm		

Accessories you'll find on the end of the catalogue.



### DALE

black, stove tiles anthracite metallic


0434717000000



### DALE

black, red patina tile\*

0434717010000

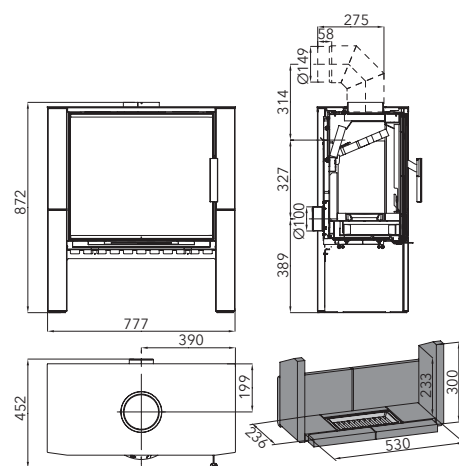

\*Offer valid until stocks last.

Tile – the colour may differ, or may contain hair cracks.



PREMIUM



## DALE WITH AN OVEN

Highlights



### Tertiary combustion

air supply directly to the flame saves fuel



### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator







### External combustion air supply

ideal for low-energy houses



### Closable external air intake

central air intake closing system – no heat loss

Capacity	4–8.1 kW
Efficiency	88% <b>A</b>
Heating ability	max. 146 m <sup>3</sup>
Dimensions h / w / d	1,296 / 780 / 443 mm
Weight	231 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	 50 cm
 Ø 100 mm	 Ø 150 mm
 Ø 100 mm	


Accessories you'll find on the end of the catalogue.



### DALE WITH AN OVEN

anthracite, tiles metallic

0434715360000

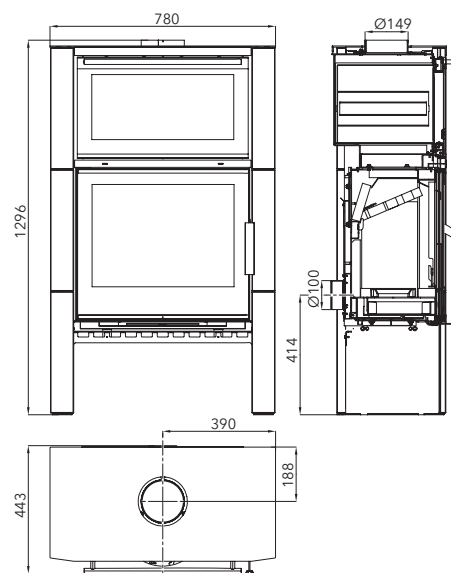

 Oven dimensions  
468 / 271 / 327 mm

Tile – the colour may differ, or may contain hair cracks.

FIREPLACE STOVES





PREMIUM



## EPIC

Highlights



### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



### External combustion air supply

ideal for low-energy houses



### Automatic door closing

just release the door and it closes on its own



### Gas tightness certified






does not require air from the room for combustion



### FLANGE FOR CONCENTRIC FLUE (not included)

0494015006025

\*If a concentric flue flange is used with Woodstone tile, the customer must purchase a new sheet metal or stone top cover that has a larger diameter for the flue!

Capacity	3.4–6.7 kW		
Efficiency	81 % <b>A<sup>+</sup></b>		
Heating ability	max. 120 m <sup>3</sup>		
Dimensions h / w / d	1,208 / 526 / 386 mm		
Weight	134 kg white, titanium 190 kg Woodstone		
Fuel consumption / h	2 kg		
Chimney draught	12 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			

Accessories you'll find on the end of the catalogue.



**EPIC**  
black, Woodstone Prestige  
0435315300000




**EPIC**  
black, Graywood Sandstone  
0435315310000



**EPIC**  
black, white  
0435315000000



**EPIC**  
black, titanium  
0435315010000

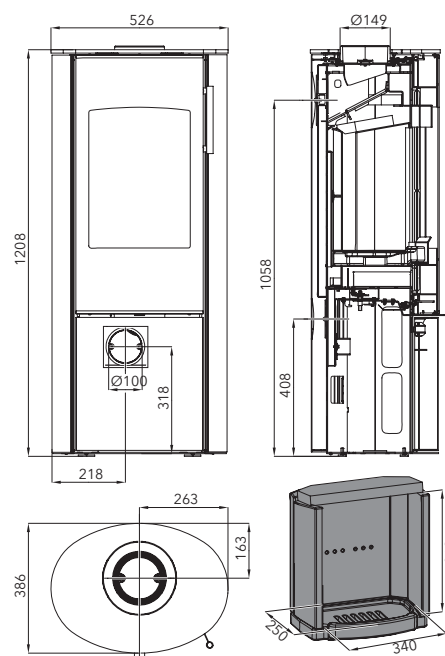

Natural stone – the colour/structure may differ.



PREMIUM



## FENIX

### Highlights



#### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



#### External combustion air supply

ideal for low-energy houses








#### Automatic door closing

just release the door and it closes on its own



#### Gas tightness certified

does not require air from the room for combustion

Capacity	3.4-6.7 kW		
Efficiency	81 %		<b>A<sup>+</sup></b>
Heating ability	max. 120 m <sup>3</sup>		
Dimensions h / w / d	1,208 / 526 / 386 mm		
Weight	134 kg		
Fuel consumption / h	2 kg		
Chimney draught	12 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			


Accessories you'll find on the end of the catalogue.



**FENIX**  
black, 3-sided window  
0435315400000



**FLANGE FOR  
CONCENTRIC FLUE**  
(not included)  
0494015006025

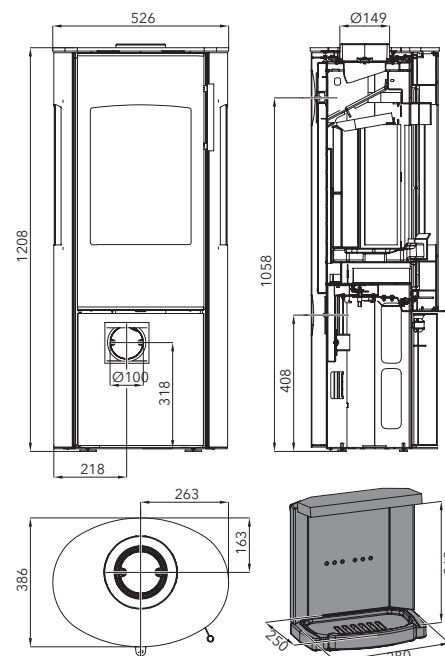

FIREPLACE STOVES





PREMIUM

## MOLDE

Highlights



**Closable external air intake**  
central air intake closing system – no heat loss








**Easy control**  
Easy control air inlet regulation – easy air supply regulation control with just one regulator



**External combustion air supply**  
ideal for low-energy houses



**Tertiary combustion**  
air supply directly to the flame saves fuel

Capacity	3–6.4 kW		
Efficiency	81% <b>A<sup>+</sup></b>		
Heating ability	max. 115 m <sup>3</sup>		
Dimensions h / w / d	1,177 / 589 / 482 mm		
Weight	233 kg		
Fuel consumption / h	1.9 kg		
Chimney draught	11 Pa		
Fuel	 33 cm		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			


Accessories you'll find on the end of the catalogue.




**MOLDE**  
black, Denim blue  
0424617430000



**MOLDE**  
black, Kunststein Grau (poured concrete)  
0424617420000



**ACCUMULATION SET FOR MOLDE**  
57 kg (not included)  
0424617401000

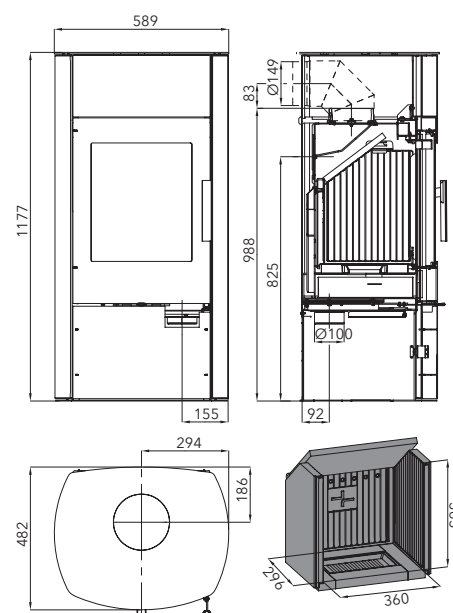

Natural stone – the colour/structure may differ.





PREMIUM

## OVALIS

Highlights



**Automatic secondary air control**  
easy and convenient control







**External combustion air supply**  
ideal for low-energy houses



**Automatic door closing**  
just release the door and it closes on its own




**Heat accumulation**  
for long-term radiation of heat

Capacity	2.5-5.3 kW	
Efficiency	81% <b>A<sup>+</sup></b>	
Heating ability	max. 95 m <sup>3</sup>	
Dimensions h / w / d Grande	1,552 / 464 / 487 mm	
Dimensions h / w / d Piccolo	1,171 / 464 / 487 mm	
Weight Grande	127 kg	
Weight Piccolo	117 kg	
Fuel consumption / h	1.5 kg	
Chimney draught	12 Pa	
Fuel	 30 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm

Accessories you'll find on the end of the catalogue.



**OVALIS GRANDE\***  
black  
0428612620000



**OVALIS PICCOLO\***  
black  
0428612610000






**ACCUMULATION SET  
FOR OVALIS GRANDE**  
70 kg (not included)  
0428650500000

**ACCUMULATION SET  
FOR OVALIS PICCOLO**  
46 kg (not included)  
0428650600000



**KNIE**  
for rear flue  
Ø 150 mm, 90° (not included)  
0332015007065

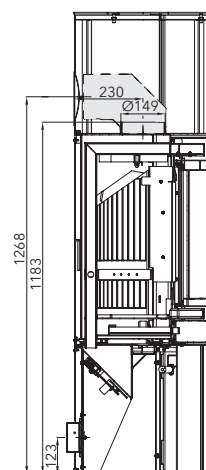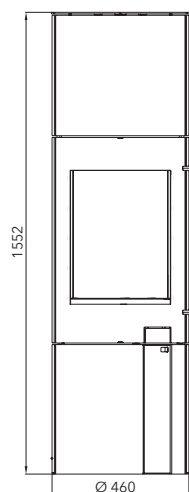

FIREPLACE STOVES

\*Offer valid until stocks last.



PREMIUM

## PINEROLO

Highlights



### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



### External combustion air supply

ideal for low-energy houses







### Closable external air intake

central air intake closing system – no heat loss



### Tertiary combustion

air supply directly to the flame saves fuel

Capacity	3–6.4 kW	
Efficiency	82% <b>A<sup>+</sup></b>	
Heating ability	max. 115 m <sup>3</sup>	
Dimensions h / w / d	1,004 / 540 / 524 mm	
Weight Speckstein	208 kg	
Weight Woodstone	179 kg	
Fuel consumption / h	1.5 kg	
Chimney draught	12 Pa	
Fuel	 33 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm

Accessories you'll find on the end of the catalogue.




### PINEROLO

black, Woodstone Prestige  
0429415600000



### PINEROLO

black, Speckstein  
0429415630000

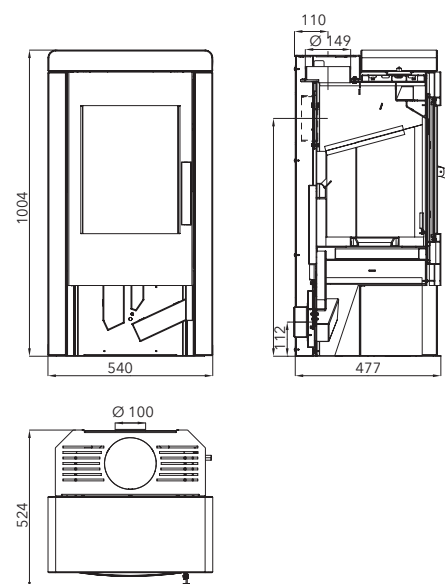

Natural stone – the colour/structure may differ.



PREMIUM

Highlights

RLU

**Gas tightness certified**  
does not require air from the room for combustion

AUTO  
AIR

**Automatic secondary air control**  
easy and convenient control

[ ]

**Heat accumulation**  
for long-term radiation of heat

AUTO  
DOOR

**Automatic door closing**  
just release the door  
and it closes on its  
own







**PISA RLU**  
black  
0429112710000




**ACCUMULATION SET  
FOR PISA RLU**  
70 kg (not included)  
0428650500000



**KNIE**  
for rear flue  
Ø 150 mm (not included)  
0332015007065

Capacity	2.6–5.4 kW	
Efficiency	87%	A <sup>+</sup>
Heating ability	max. 97 m <sup>3</sup>	
Dimensions h / w / d	1,441 / 460 / 488 mm	
Weight	122 kg	
Fuel consumption / h	1.25 kg	
Chimney draught	12 Pa	
Fuel	 33 cm	
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm

Accessories you'll find on the end of the catalogue.

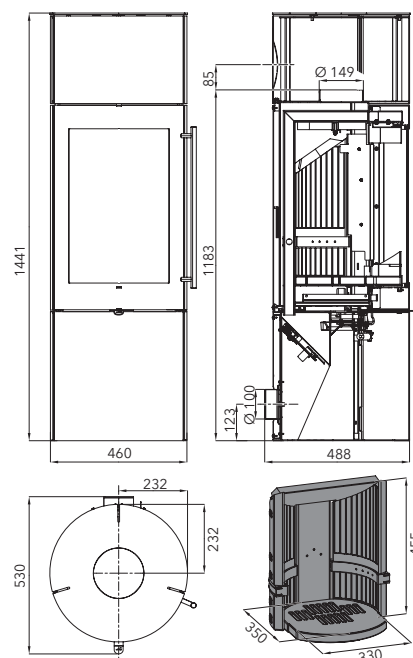


FIREPLACE STOVES



# FIREPLACE STOVES WITH HEAT EXCHANGER

*smart heating*

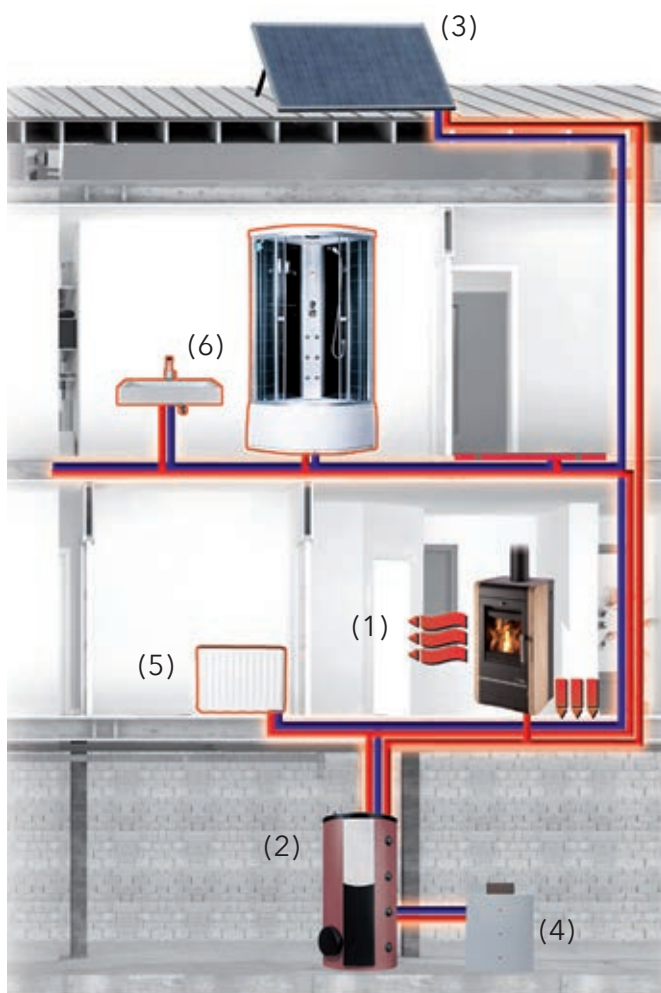

Part of the heat is used to heat the space in which the stove is installed (1). The rest is stored in the accumulation tank (2), which can also be supplied from other heat sources, e.g., boilers (4), solar panels (3). When needed, the heat from the tank can be supplied to the heating system (radiators) (5) or it can be used to heat water (6).

## Warning:

The exchanger cannot be used without a connection to a heating system. Only a specialised company can make the connection.



## Smart heating with HAAS+SOHN

A stove can be more than just an interior accessory, it can heat the entire house. Fireplace stoves with a heat exchanger can be connected to the central heating and heat the water in radiators. A quality warm-water heat exchanger can transfer 70% of the heat to water. Our stoves with exchangers have enough power to heat service water as well. A few logs can not only make you warm, but also prepare hot water for you.



## Patented exchanger cleaning

Cleaning the exchanger is even easy with the door closed. You can remove the debris from the tubes simply by moving the wiper blade.



## Replaceable heat exchanger

You can add the exchanger to the stove at any time, or remove it and replace it with a plug. This allows additional connection to a heating system (central heating) or refitting to hot-air operation.




## Automatic controller of primary combustion air

Prevention of the stove from overheating after a power failure. After a power failure the circulating pump, which pumps water into the radiators, stops working. The heat accumulates in the exchanger and there's a risk of it overheating (the water temperature in the system is near boiling point). When the water in the exchanger reaches 95 °C, the thermostatic valve shuts off the primary air supply. This will reduce the combustion and prevent the temperature from increasing.

## CONNECTION DIAGRAM WHEN USING UPS

Informative diagram of the heating system.

Overheating protection during electrical power failure by using an uninterrupted power supply (UPS).

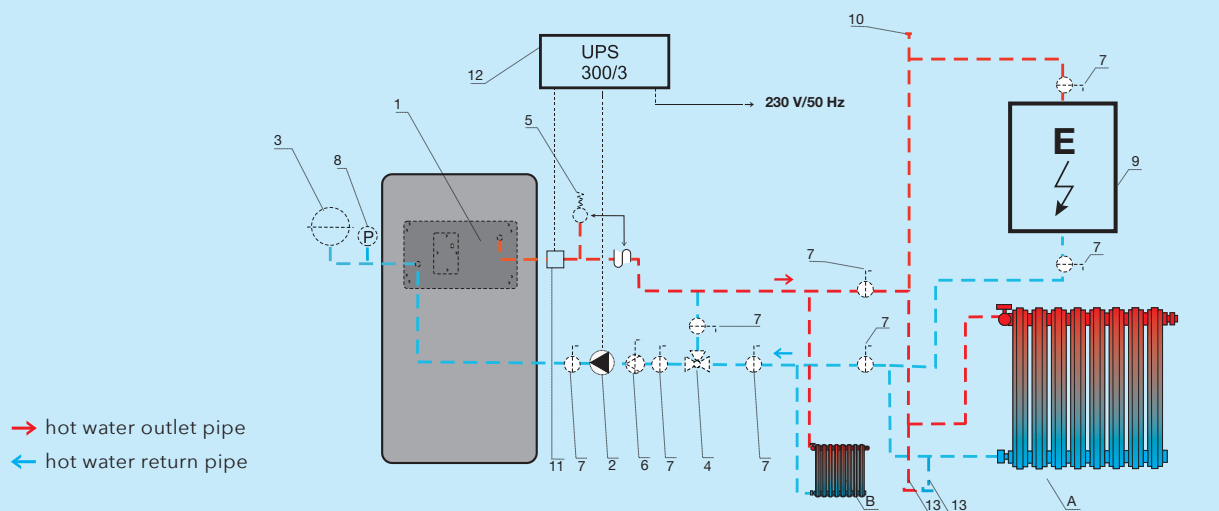

### LEGEND:


- 1. fireplace stoves with exchanger
- 2. circulation pump
- 3. expansion tank
- 4. thermo-regulation valve, e.g. ESBE TV 25 (60-75 °C)

- 5. pressure relief valve
- 6. closing filter
- 7. ball shut-off valve
- 8. pressure gauge
- 9. electric boiler

- 10. ventilation valve
- 11. attached thermostat
- 12. UPS („backup power supply“)
- 13. release vent
- A. connection to the entire heating system
- B. connection to part of the heating system

## DIAGRAM OF CONNECTION WITH COOLING LOOP

Informative diagram of connection of the exchanger with the cooling loop to the hot-water exchanger, against overheating in the event of an electrical power outage.

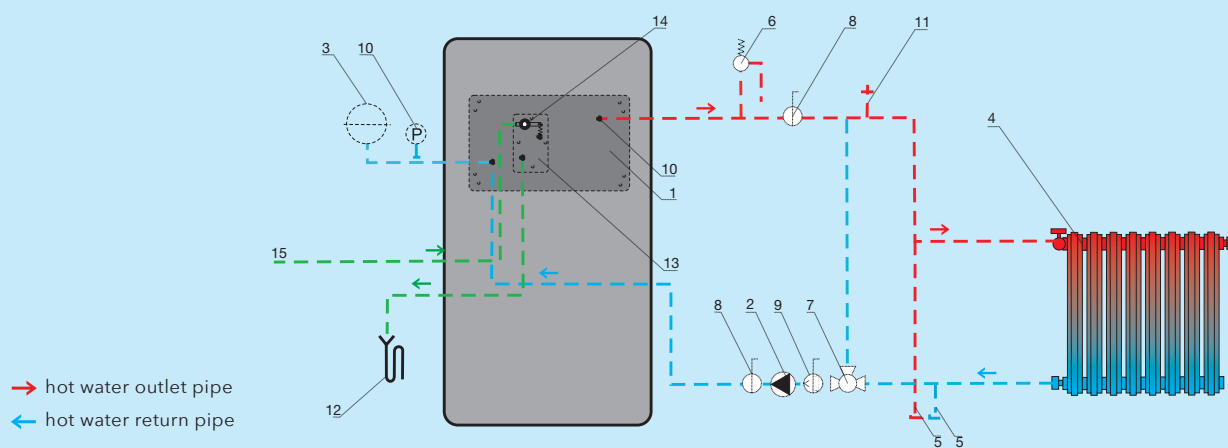

### LEGEND:

- 1. exchanger
- 2. circulation pump
- 3. expansion tank
- 4. radiator
- 5. release vent

- 6. pressure relief valve
- 7. thermo-regulation valve, e.g. ESBE TV 25 (60-75 °C)
- 8. ball shut-off valve
- 9. BALL closing filter
- 10. pressure gauge

- 11. ventilation valve
- 12. waste
- 13. cooling exchanger (loop)
- 14. relief heat valve
- 15. connected to cold water line



FARUM   
Page 37



VISBY II   
Page 38





PREMIUM



## FARUM

Highlights



**Automatic primary combustion air regulator**  
prevents problems during power outages



**Replaceable exchanger**  
option of replacing the exchanger with a dummy plug



**Cooling loop**  
protection from exchanger overheating



**External combustion air supply**  
ideal for low-energy houses



**COOLING LOOP**  
(not included)  
0432317006108

NEW




**FARUM**  
black, Woodstone Prestige  
0433437000000



**FARUM**  
black, Speckstein  
0433437100000

Capacity (in heaters)	5-14.9 kW (10.1 kW)
Efficiency	85% <b>A<sup>+</sup></b>
Heating ability	max. 268 m <sup>3</sup>
Dimensions h / w / d	1,217 / 624 / 632 mm
Weight	264 kg
Fuel consumption / h	4.1 kg
Chimney draught	12 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm

Accessories you'll find on the end of the catalogue.

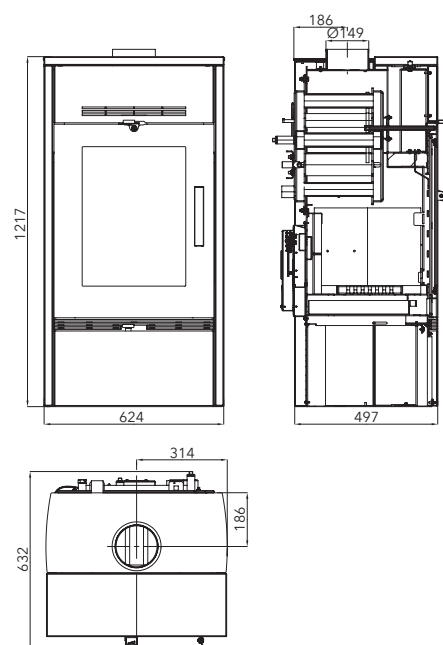

Natural stone - the colour/structure may differ.

FIREPLACE STOVES WITH HEAT EXCHANGER



PREMIUM



## VISBY II

### Highlights



#### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



#### External combustion air supply

ideal for low-energy houses



#### Closable external air intake

central air intake closing system – no heat loss



#### Cooling loop

protection from exchanger overheating

Capacity (in heaters)	3.3-10.2 kW (7.8 kW)
Efficiency	79% <b>A</b>
Heating ability	max. 184 m <sup>3</sup>
Dimensions h / w / d	1,012 / 524 / 523 mm
Weight	192 kg
Fuel consumption / h	3.1 kg
Chimney draught	11 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm


Accessories you'll find on the end of the catalogue.



**VISBY II**  
black, Woodstone Prestige  
0434517500000



**COOLING LOOP**  
(not included)  
0434515006108

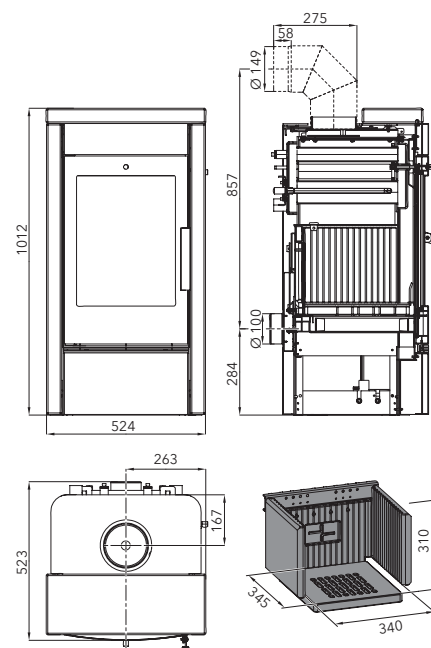

Natural stone – the colour/structure may differ.





# FIREPLACES

*real heat*

## YOUR BENEFITS

- ✦ The thermal radiation will last longer thanks to heat accumulation
- ✦ The fireplace kit can be painted individually
- ✦ Optional fire protection kit Fireplaces – real heat

## DESIGN YOUR OWN FIREPLACE!

A crackling, cosy open fire and pleasant heat in the room – enjoy the „luxury“ of your own fireplace. You can adapt our fireplace set so that the colour will match your living area.

## EXAMPLE OF AN ASCIM CASING



Determine the fireplace location and mark its outline. (1)



Fit the fire protection on the fireplace insert (special accessory). (2)



Position the fireplace insert with a spirit level. (3)



Just follow the supplied guide and assemble all the parts. Fix them in place with the acrylic glue. (4 + 5)



We supply the enclosure in a raw state. You can coat it with any interior paint. (6)

Step by step (follow us on YouTube)

**You Tube** @haassohnrukov.s.r.o.





ADONIS II   
Page 41



LEVI   
Page 42




LEVI   
Page 43



SKARA   
Page 44



NOVARA 17 with heat exchanger   
Page 45



PREMIUM







## ADONIS II insert: Jonava IV

Highlights



External combustion air supply  
ideal for low-energy houses

Capacity	3.9–8.3 kW	
Efficiency	80%	<b>A</b>
Heating ability	max. 149 m <sup>3</sup>	
Dimensions h / w / d	1,510 / 1,452 / 750 mm	
Weight	448 kg	
Fuel consumption / h	2.3 kg	
Chimney draught	12 Pa	
Fuel	 50 cm	
	 Ø 180 mm	 Ø 180 mm
 Ø 100 mm		
Accessories you'll find on the end of the catalogue.		



ADONIS II  
0601800620000

### FIRE FIGHTING PROTECTION (not included) 0648000500000


Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection: min. 1,210 mm, chimney flue diameter 180 mm

Delivery on 2 pallets  
(9 parts + hearth lining).

### WOOD BOX (not included) 0658000510000

Option of adding  
a wood bin.

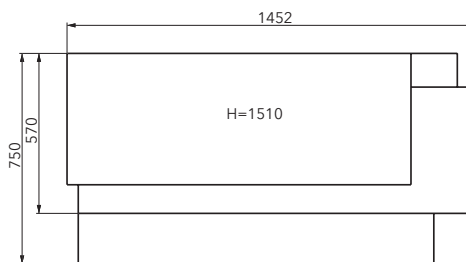

Illustrative photo = Lightweight concrete casing is delivered unpainted. Normally supplied without a wood bin.

FIREPLACE SETS AND FIREPLACE INSERTS



PREMIUM



## LEVI

Highlights



### Tertiary combustion

air supply directly to the flame saves fuel



### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



**LEVI**  
structured décor, horizontal  
0601880610000



**LEVI**  
smooth décor  
0601880600000









**LEVI**  
structured décor, vertical  
0601880620000


**FIRE FIGHTING PROTECTION**  
(not included)  
0641880140000



You can order a practical firewood storage area for the lower section. You may choose a „smooth décor“ or clean design for your firewood storage area.

Capacity	4–8.2 kW		
Efficiency	80% <b>A<sup>+</sup></b>		
Heating ability	max. 147 m <sup>3</sup>		
Dimensions h / w / d	1,811 / 760 / 447 mm		
Weight	320 kg		
Fuel consumption / h	2.5 kg		
Chimney draught	12 Pa		
Fuel	 50 cm 		
 Ø 100 mm	 Ø 150 mm	 Ø 150 mm	
 Ø 100 mm			

Accessories you'll find on the end of the catalogue.

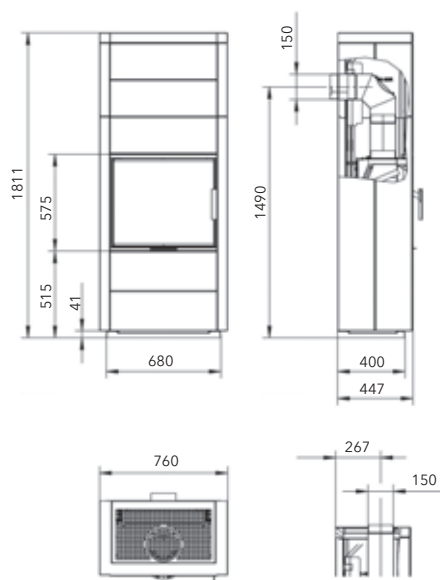





PREMIUM



## LEVI

### Highlights



#### Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



#### External combustion air supply

ideal for low-energy houses



#### Closable external air intake

central air intake closing system – no heat loss



#### Tertiary combustion

air supply directly to the flame saves fuel

Capacity	4–8.2 kW
Efficiency	80% <b>A<sup>+</sup></b>
Heating ability	max. 147 m <sup>3</sup>
Dimensions h / w / d	641 / 644 / 408 mm
Weight	97 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	50 cm
	Ø 150 mm  Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.



**LEVI**  
black  
0434715900000




**WALL-IN FRAME**  
(not included)  
black

0434715210400



**ASSEMBLY PARTS LEVI**  
(not included)  
black

0434715200450

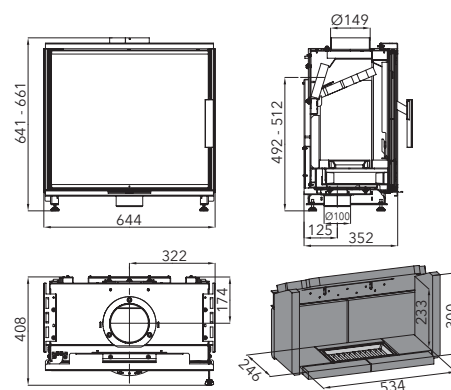



PREMIUM



## SKARA

### Highlights



**Closable external air intake**  
central air intake closing system – no heat loss



**Easy control**  
Easy control air inlet regulation – easy air supply regulation  
control with just one regulator



**External combustion air supply**  
ideal for low-energy houses



**Tertiary combustion**  
air supply directly to the flame saves fuel

Capacity	3–7 kW
Efficiency	82% <b>A<sup>+</sup></b>
Heating ability	max. 126 m <sup>3</sup>
Dimensions h / w / d	890 / 630 / 341 mm
Weight	88 kg
Fuel consumption / h	2 kg
Chimney draught	11 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.



**SKARA**  
black,  
left – glass outside, concrete  
0633015300000




**SKARA**  
black,  
right – glass outside, concrete  
0633015200000



**LEFT SKARA FRAME**  
(not included)  
0633015101300



**RIGHT SKARA FRAME**  
(not included)  
0633015001300

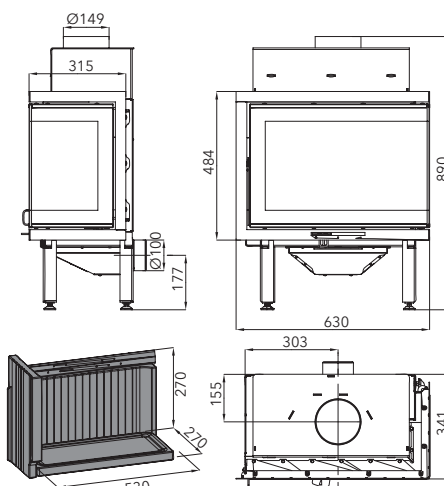





PREMIUM



## NOVARA 17 WITH HEAT EXCHANGER

Highlights



**External combustion air supply**  
ideal for low-energy houses



**Automatic primary combustion air regulator**  
prevents problems during power outages




**Cooling loop**  
protection from  
exchanger overheating






**Replaceable exchanger**  
option of replacing the  
exchanger with a dummy plug




**NOVARA 17\***  
anthracite  
0618018170000

Capacity (in heaters)	5.2-17.4 kW (10.8 kW)
Efficiency	90% <b>A<sup>+</sup></b>
Heating ability	max. 314 m <sup>3</sup>
Dimensions h / w / d	1,720 / 778 / 566 mm
Weight	283 kg
Fuel consumption / h	4.5 kg
Chimney draught	12 Pa
Fuel	 50 cm

 Ø 180 mm	 Ø 180 mm
 Ø 120 mm	

Accessories you'll find on the end of the catalogue.

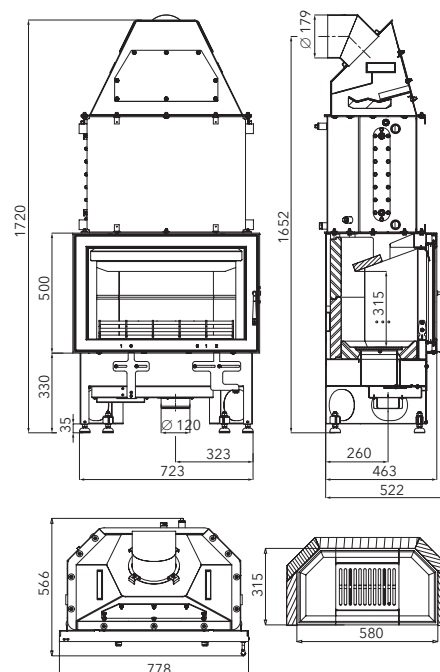

FIREPLACE INSERTS

\*Offer valid until stocks last.



## HEAT EXCHANGERS, CAPS, COOLING LOOPS

HEAT  
EXCHANGERS

Order nr.

**ANDRUS  
FARUM**

0432317006101

**NIVALA**

0432317001105

**NOVARA**

0618018073200

HEAT  
EXCHANGERS

Order nr.

**TREVISIO**

0332015006100

**VESTRE  
MARMA  
ADRIA II**

0426837117000

**VESUVIO II  
10 kW/1S,  
12 kW/2S**

0619018156050

**VESUVIO II  
13 kW/1S,  
15 kW/2S**

0619018206050

**WERFEN 9**

0419018205050

**MATERA**

0435215005050



## CAPS

Order nr.

**ANDRUS  
FARUM**

0432317005700

**NIVALA**

0432317006700

**TREVISIO II**

0433900005000

**VESTRE  
MARMA  
ADRIA II**

0426817106011

**VESUVIO II**

0619018155150

**WERFEN 9**

0619018155150

**MATERA**

0435215005060

COOLING  
LOOP

Obj. č.

**ANDRUS  
FARUM  
NIVALA**

0432317006108

**ADRIA II  
MARMA  
VESTRE  
BERGAMO**

0436819005019

**TREVISIO  
TREVISIO II**

0332015005029

**ALMO  
ALYTUS  
AVESTA  
BRYNE  
SAVONA  
VISBY**

0434515006108

**VESUVIO II**

0619018156017

**WERFEN 9  
MATERA**

0419018155018

## FLUE PIPES FOR FIREPLACE STOVES – SHEET METAL THICKNESS 1.5 MM

	<b>GAS PIPE</b>	<b>Ø 120 mm</b>	<b>Ø 120 mm</b>	<b>Ø 120 mm</b>		<b>Ø 160 mm</b>	<b>Ø 180 mm</b>
	Lenght	250 mm	500 mm	1000 mm		250 mm	250 mm
	Order nr. anthracite	1101122520000	1101125020000	1101129920000		-	-
	Order nr. black	-	-	-		1101162510000	1101182510000
	<b>GAS PIPE</b>	<b>Ø 130 mm</b>	<b>Ø 130 mm</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>	<b>Ø 150 mm</b>	<b>Ø 150 mm</b>
	Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
	Order nr. anthracite	1101132520000	1101135020000	1101139920000	1101152520000	1101155020000	1101159920000
	Order nr. black	1101132510000	1101135010000	1101139910000	1101152510000	1101155010000	1101159910000
	<b>GGAS PIPE WITH BUTTERFLY VALVE</b>	<b>Ø 130 mm</b>	<b>Ø 130 mm</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>	<b>Ø 150 mm</b>	<b>Ø 150 mm</b>
	Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
	Order nr. anthracite	1101132620000	1101135120000	1101139820000	1101152620000	1101155120000	1101159820000
	Order nr. black	1101132610000	1101135110000	1101139810000	1101152610000	1101155110000	1101159810000
	<b>GAS PIPE WITH CLEANING APERTURE</b>	<b>Ø 130 mm</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>	<b>Ø 150 mm</b>		
	Lenght	500 mm	1000 mm	500 mm	1000 mm		
	Order nr. anthracite	1101135220000	1101139720000	1101155220000	1101159720000		
	Order nr. black	1101135210000	1101139710000	1101155210000	1101159710000		

## ELBOWS AND SOCKETS FOR FIREPLACE STOVES – SHEET METAL THICKNESS 1.5 MM

	<b>GAS ELBOW</b>	<b>Ø 120 mm</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>	<b>Ø 160 mm</b>	<b>Ø 180 mm</b>
	Order nr. anthracite	1103129010000	1103139020000	1103159020000	-	-
	Order nr. black	-	1103139010000	1103159010000	1103169010000	1103189010000
	<b>TWO PIECE FLUE COLLAR</b>	<b>Ø 120 mm</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>	<b>Ø 160 mm</b>	<b>Ø 180 mm</b>
	Order nr. anthracite	1105120120000	1105130120000	1105150120000	-	-
	Order nr. black	-	1105130110000	1105150110000	1105160110000	1105180110000
	<b>GAS ELBOW WITH CLEANING APERTURE</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>			
	Order nr. anthracite	1103139120000	1103159120000			
	Order nr. black	1103139110000	1103159110000			
	<b>GAS ELBOW 45°</b>	<b>Ø 130 mm</b>	<b>Ø 150 mm</b>			
	Order nr. anthracite	1103134520000	1103154520000			
	Order nr. black	1103134510000	1103154510000			

## ADJUSTABLE ELBOWS – SHEET METAL THICKNESS 1.5 MM

	<b>ORDER NR.</b>	<b>Ø 150 mm</b>	<b>Ø 160 mm</b>	<b>Ø 180 mm</b>
	UNI adjust. elbow, cleaning hole 180 / 0-180° UNI 5 segments (1.5)			1101191800000
	Adjustable elbow 180 / 0-90° (1.5)			1101191810000
	Adjustable elbow 180 / 0-45° (1.5)			1101191820000
	UNI adjust. elbow, cleaning hole 160 / 0-180° UNI 5 segments (1.5)		1101191600000	
	Adjustable elbow 160 / 0-90° (1.5)		1101191610000	
	Adjustable elbow 160 / 0-45° (1.5)		1101191620000	
	UNI adjust. elbow, cleaning hole 150 / 0-180° UNI 5 segments (1.5)	1101191500000		
	Adjustable elbow 150 / 0-90° (1.5)	1101191510000		
	Adjustable elbow 150 / 0-45° (1.5)	1101191520000		



## FLUE PIPES FOR PELLET STOVES

<b>GAS PIPE</b>	<b>Ø 80 mm</b>
Lenght	250 mm
Order nr. black	1101172500000

<b>GAS PIPE</b>	<b>Ø 80 mm</b>
Lenght	500 mm
Order nr. black	1101175000000

<b>GAS PIPE</b>	<b>Ø 80 mm</b>
Lenght	1000 mm
Order nr. black	1101171000000

<b>SET 1</b>	<b>1000 + 500 mm</b>
Order nr. black	1101172700000
(pipe 1 m; pipe 0.5 m; pipe 0.25 m; elbow 90°; T-piece; condensation plug; 2 clamps)	



<b>T-PIECE</b>	<b>Ø 80 mm, 90°</b>
Order nr. black	1101172610000
<b>CONDENSATION PLUG</b>	
Order nr. black	1101172620000
<b>SEAL</b>	
Order nr. green	1101172630000
<b>CLAMP</b>	
Order nr. black	1101172640000
<b>ELBOW</b>	<b>Ø 80 mm</b>
Order nr. black	1101172600000

<b>SET 2</b>	<b>1000 mm</b>
Order nr. black	1101172750000
(pipe 1 m; pipe 0.25 m; elbow 90°; T-piece; condensation plug; 2 clamps)	



## LOG BASKETS

<b>LOG BASKETS</b>	<b>ANGULAR LITTER BIN</b>
Dimensions	35 x 46 x 30 cm
Colour	black
Order nr.	1116002700000



**MIDDLE  
BASKET**

---

40 x 24 x 36 cm

---

black, wood

---

1116002500000



**OVAL  
BASKET**

---

46 x 22 x 32 cm

---

black, wood

---

1116002400000

A black metal basket with a diamond-patterned mesh and wooden handles. The basket is shown from a side-on perspective, highlighting its curved shape and the texture of the metal mesh. The handles are made of light-colored wood and are attached to the top of the basket. The basket is empty and is set against a plain white background.

**BASKET BIG  
(WITHOUT /  
WITH INSTRUMENTS)**

---


68 x 48 x 45 /  
70 x 49 x 46 cm

---

black, wood

---

1116002600000 /  
1116001600000

	
<b>BASKET DERBY (WITH INSTRUMENTS)</b>	
Dimensions	68 x 48 x 45 cm
Colour	black, wood
Order nr.	1116003000000

## FIREPLACE TOOLS

<b>FIREPLACE TOOLS</b>	<b>BAU IV - THREE-PIECE</b>
Dimensions	58 x 20 x 20 cm
Colour	black, wood
Order nr.	1116002200000



## REPAIRING SPRAYS



REPAIRING SPRAY	COLOUR BLACK	COLOUR ANTHRACITE	COLOUR SILVER
Volume	400 ml	400 ml	400 ml
Order nr.	0070200050005	0070200020005	0070200040005






## FIREPLACE STOVE GLASS FLOOR PLATES

MADE OF 6 MM THICK HARDENED GLASS



Elegant and safe

- ✚ 6 mm thick hardened glass with polished edge
- ✚ floor protection from scratches
- ✚ fire protection of flammable floors (e.g. wooden floors)

GLASS  
FLOOR PLATES  
- FORM "A"GLASS  
FLOOR PLATES  
- FORM "A"GLASS  
FLOOR PLATES  
- FORM "B"GLASS  
FLOOR PLATES  
- FORM "C"GLASS FLOOR PLATES  
- FORM  
A "D"

Dimensions 900 x 750 mm

Order nr. 1115409200000

Dimensions 1,000 x 1,000 mm

Order nr. 1115410200000

Dimensions 1,000 x 1,000 mm /  
580 mm 45°



Order nr. 1115510200000

Dimensions 1,000 x 1,000 mm /  
R = 500 mm

Order nr. 1115910200000

Dimensions 1,000 x 1,000 mm

Order nr. 1115610200000

GLASS  
FLOOR PLATES  
- FORM "E"GLASS  
FLOOR PLATES  
- FORM "F"Dimensions 1,000 x 1000 mm /  
R = 800 mm

Order nr. 1115910300000


Dimensions 1,000 x 1,000 mm /  
R = 500 mm

Order nr. 1115910400000

## FLEXI HOSES FOR CONNECTION OF EXTERNAL AIR SUPPLY

HOSE TYPE	ORDER NR.
FLEXI HOSE FOR CPV 80/3 m	1101501000022
FLEXI HOSE FOR CPV 100/3 m	1101501000020
FLEXI HOSE FOR CPV 125/3 m	1101501000021

HOSE TYPE	ORDER NR.
FLEXI HOSE FOR CPV 80/3 m black lacquer	1101501000025
FLEXI HOSE FOR CPV 100/3 m black lacquer	1101501000023
FLEXI HOSE FOR CPV 125/3 m black lacquer	1101501000024

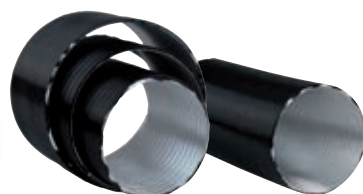








AL TAPE (120°C) TAD 50/50,  
BLACK (3128D)  
Order nr. 0088500140000

STEEL HOSE CLAMP BLACK










Ø 80 mm Order nr. 0088500150000  
 Ø 100 mm Order nr. 0088500160000  
 Ø 125 mm Order nr. 0088500170000  
 Ø 150 mm Order nr. 0088500180000

# TECHNICAL PARAMETERS












## PELLET STOVES

Page	Model									
10	HSP 4 PARMA	2.5-8.5	90	207	80		max. 153	1.9	32	12
11	HSP 4 PRATO	2.4-8.5	92	184	80		max. 153	1.9	17	12
12	HSP 6 RUEDA RLU	2.4-8.3	90	122		80	max. 149	1.9	32	11
13	HSP 6 RUEDA C RLU	2.4-8.3	90	163		80	max. 149	1.9	32	11
14	HSP 6 TOLEDO IV 32	2.4-8.3	90	118		80	max. 149	1.9	32	11
15	HSP 7 II	2.4-8.2	90	126		80	max. 148	1.9	12	12
16	HSP 7 II GRANDE RLU	2.4-8.2	90	132		80	max. 148	1.9	17	12
17	HSP 7 II GRANDE RLU DE LUXE	2.4-8.2	90	132		80	max. 148	1.9	17	12
18	HSP VIANO	2.4-8.6	90	99		80	max. 155	2.0	17	11












## FIREPLACE STOVES WITH HEAT EXCHANGER

Page	Model									
21	HSP 6 WITH HEAT EXCHANGER	3.2-10.9 (6.8)	93	178		80	max. 196	2.41	32	12

## FIREPLACE STOVES













Page	Model											
24	BRILLO	3.4-6.7	81	149	33 cm	150	150	max. 120	2			12
26	DALE	4.1-8.2	80	153	50 cm	150	150	max. 147	2.5	•	•	12
27	DALE WITH AN OVEN	4-8.1	88	231	50 cm	150		max. 146	2.2			12
28	EPIC	3.4-6.7	81	134/190	33 cm	150	150	max. 120	2			12
29	FENIX	3.4-6.7	81	134	33 cm	150	150	max. 120	2			12
30	MOLDE	3-6.4	81	233	33 cm	150	150	max. 115	1.9			11
31	OVALIS (GRANDE / PICCOLO)	2.5-5.3	81	127 / 117	30 cm	150	150	max. 95	1.5			12
32	PINEROLO (Woodstone / Speckstein)	3-6.4	82	179 / 208	33 cm	150	150	max. 115	1.5			12
33	PISA RLU	2.6-5.4	87	122	33 cm	150	150	max. 97	1.2			12

## FIREPLACE STOVES WITH HEAT EXCHANGER













Page	Model											
37	FARUM WITH HEAT EXCHANGER	5-14.9 (10.1)	85	264	33 cm	150		max. 268	4.1	•	•	12
38	VISBY II WITH HEAT EXCHANGER	3.3-10.2 (7.8)	79	192	33 cm	150		max. 184	3.1			11















## FIREPLACE SETS

Page	Model												
41	<b>ADONIS II</b>	3.9-8.3	80	448	50 cm	180	180	max. 149	2.3	678 × 400			12
42	<b>LEVI</b>	4-8.2	80	320	50 cm	150	150	max. 147	2.5		•	•	12

## FIREPLACE INSERTS

Page	Model												
43	<b>LEVI</b>	4-8.2	80	97	50 cm	150	150	max. 147	2.5		•	•	12
44	<b>SKARA</b>	3-7	82	88	50 cm	150		max. 126	2.0				11

## FIREPLACE INSERTS WITH HEAT EXCHANGER

Page	Model												
45	<b>NOVARA 17 WITH HEAT EXCHANGER</b>	5.2-17.4 (10.8)	90	283	50 cm	180	180	max. 314	4.5	678 × 400			12

## EXPLANATORY NOTES



Capacity (kW)



Efficiency (%)



Weight (kg)



Top flue-gas outlet (Ø mm)



Rear flue-gas outlet (Ø mm)



Lump wood  
(max. length in cm)



Environment friendly  
pressed fuel



Brown-coal briquettes



Heating ability (m<sup>3</sup>)



Fuel consumption (kg/h)



Chimney draught (Pa)



Volume of pellet  
container (kg)



Dimensions of glass  
w × d (mm)

# QUALITY TIMES

*with our stove*

HAAS+SOHN

@haassohnrukov

HAAS+SOHN RUKOV s. r. o.

Nádražní 260  
407 56 Jiřetín pod Jedlovou  
Czech Republic

Phone: +420 412 510 101

prodej@haassohn.com  
www.haassohn-rukov.com



Your HAAS+SOHN dealer: