



ECO DESIGN 2022

www.haasohn-rukov.com



QUALITY TIMES

with our stove



26

27

QUALITY TIMES
with our stove



CONTENT



SERVICE

Your service - plus	6
Pictogram overview Highlights / Explanatory notes	7

PELLET STOVES

Product Highlights	9
Pellet stoves	11

PELLET STOVES WITH HEAT EXCHANGER

Product Highlights	22
Pellet stoves with heat exchanger	21



FIREPLACE STOVES



Product Highlights	24
Fireplace stoves	26

FIREPLACE STOVES WITH HEAT EXCHANGER

Product Highlights	62
Fireplace stoves with heat exchanger	61

FIREPLACE SETS

Assembly instructions	76
Fireplace sets	77

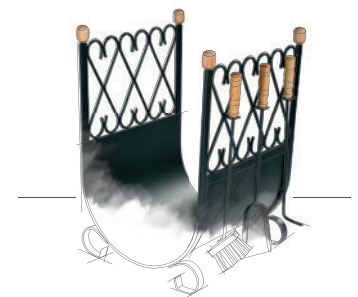

FIREPLACE INSERTS

Fireplace inserts	83
-------------------	----

FIREPLACE INSERTS WITH HEAT EXCHANGER

Fireplace inserts with heat exchanger	89
---------------------------------------	----

ACCESSORIES

Heat exchangers, caps, cooling loops	75
Flue pipes, elbows and sockets, pellet stove flues, log baskets, fireplace tools, repairing sprays, cleaning spray	90-91
Glass floor plates, zugexs, flexi hoses	92
Technical parameters	93

www.haassohn-rukov.com

Visit us also on





WE ARE LAUNCHING A NEW CHAPTER

Dear customers, business partners, and friends of the brand,

it is with great excitement that we present our new visual identity, the result of a carefully planned rebranding. Just as in human life, so too in the corporate world, we can reach a point where, despite all efforts, it no longer makes sense to continue a dysfunctional partnership.

Something big is ending, but above all, something new is beginning; a time of new beginnings is upon us. For us, the brand change means not only a new look, but above all a renewal of our values, fresh energy, and a clear expression of where we are heading next.

This change also brings freedom and new opportunities to better utilize our own potential and to be closer to you, our partners and customers. Now we can respond more flexibly to your needs and implement new ideas into our products and services more quickly. In short, we are returning to the roots of a family business free from restrictive corporate rules.

For us, rebranding is a decision to forge our own path—we look back with gratitude and humility, but we open up new possibilities with determination. We believe that the new brand identity will be an inspiration not only for us but also for you, our customers, and that together we will build relationships full of trust and new experiences. Thank you for joining us on this journey of transformation and shared growth.

Václav Cintl, Eng.
Director and CEO

HAAS
+
SOHN

is
changing
to



FOXMARK

HOME AT ITS BEST



ECODESIGN 2022

FORWARD-THINKING

Fire always works the same. You need the right amount of air in the right place. At HAAS+SOHN, we can ensure that. Air supply affects stove emissions and fuel consumption. A clean environment is important to us and our children. Therefore, our stoves have multiple air inlets distributed and regulated so that combustion is always as efficient and clean as possible.

Since 2018, all our products have complied with the EU's ECODESIGN 2022 regulations and have prominently displayed their energy class markings. You will always find this information on each stove in the form of an energy label.



YOUR SERVICE - PLUS















OUR PROMISE

We are committed to making sure that you can still enjoy your stove even after 15 years have passed. That's why we will still be within reach after you heat up your stove for the first time. Do you need advice? Or is your stove not working the way it should? Write to us at poradna@haassohn.com. We are here to help, no matter how old your stove is.



QUALITY TIMES
with our stove












PICTOGRAM OVERVIEW

 Easy control Easy control air inlet regulation – easy air supply regulation control with just one regulator	 Tertiary combustion air supply directly to the flame saves fuel	 Extremely quiet operation
 Closable external air intake central air intake closing system – no heat loss	 External combustion air supply ideal for low-energy houses	 Large glazed area
 Replaceable exchanger option of replacing the exchanger with a dummy plug	 Automatic primary combustion air regulator prevents problems during power outages	 Enamel technology
 Cooling loop protection from exchanger overheating	 WLAN optional feature WLAN 	 Reflective glass
 Heat exchanger cleaning simple and clean	 Fully automatic temperature control the optimum room temperature exactly when you need it	 HAAS+SOHN Application Comfortable control from a smartphone
 Heat accumulation for long-term radiation of heat	 Friendly for allergic persons	 Gas tightness certified does not require air from the room for combustion
 Fast heating of air in the room	 Colour touch screen and integrated WLAN module	 Automatic secondary air control easy and convenient control
 Double-Air function – can heat 2 rooms at the same time	 Simple operation using a mobile app	 Automatic door closing just release the door and it closes on its own
	 Gas tightness certified does not require air from the room for combustion	



The icon in the catalogue that identifies stoves suitable for low-energy houses. It provides quick orientation when choosing low-output stoves with external air intake suitable for low-energy and passive houses.

EXPLANATORY NOTES

 <u>Rear flue-gas outlet (∅ mm)</u>	 <u>Weight (kg)</u>	 <u>Pellets</u>
 <u>Top flue-gas outlet (∅ mm)</u>	 <u>Oven dimensions h × w × d (mm)</u>	 <u>Lump wood (max. length in cm)</u>
 <u>Back external combustion air supply (∅ mm)</u>	 <u>Chimney draught (Pa)</u>	 <u>Environment friendly pressed fuel</u>
 <u>Lower external combustion air supply (∅ mm)</u>		 <u>Brown-coal briquettes</u>

Heating ability:

It is determined based on applicable standards and the specific annual energy consumption of a typical low-energy house with the room height of 2.5 m built between 2002 and 2008. You must remember that the annual energy consumption depends on many factors such as the room height, age and condition of the masonry and insulation, the window area, house orientation, temperature differences and other aspects. The value can vary.

All information provided is subject to change and can be affected by typographical or printing errors.



Your benefit

INTELLIGENT AND COMFORTABLE

- + new, simple operation concept
- + simple use
- + fully automatic temperature control
- + energy-efficient heating
- + extremely silent operation
- + suitable for allergic persons
- + easy to clean
- + lowest energy consumption: only 30-50 W/h, only 9 W/h in the standby mode



WHY ARE PELLET STOVES A GOOD CHOICE?

Who better to tell you more about the benefits of pellet stoves than the users themselves.

What are the most frequently mentioned benefits?

Heating without work and chopping wood - „I simply press a button and start heating.“ „I have a lot of work building the house and I am glad that I don't need to also chop wood.“

Clean and dust-free - „My wife and children suffer from asthma and allergies. We sought a suitable heating system that would at the same time give us a traditional view of the fire. A pellet stove is a clear choice.“ „I did not want to turn my living room into a boiler room.“

Simple operation - „It can be operated easily, even by my wife and small children. I work long hours, and for this reason we sought a heating method which even a woman in the household can cope with. She need not carry a heavy basket of wood.“ „I can set the automatic operating mode and the stove automatically switches itself on and off.“

Simple control via the smart phone application - „I appreciate simple control via a smart phone. I can check the heating conditions at home even when I am out.“ „I can fire up the stove via my smart phone when I am on my way home from work and my home is already warm when I arrive.“

Safety thanks to inbuilt sensors and detectors - „The stove monitors the set temperature, thus precluding overheating.“ „We have a pellet stove with an exchanger, which easily heats the entire house. The stove automatically switches off when it runs out of fuel or the power fails.“

Easy maintenance - „Maintenance is really easy and it generates minimal ash. I subsequently use the ash on the garden in the greenhouse.“ „I need not clean the firebox and remove the ash everyday, which is a great comfort.“

Quality times - „A beautiful accessory for the interior, we like the view of the flames. Moreover, a quality pellet stove gives out the fragrance of wood.“ „The quality workmanship of the stove, the feeling we get from the view of the open flames, truly romantic.“

PELLET STOVE CONTROL

USING SMART TECHNOLOGY FROM HAAS+SOHN



Pellet stoves with WLAN module Obeying at a distance

For your comfort and freedom. With the stove control through a mobile phone you can control the warmth of your home wherever you are. Just connect the WLAN module with two functions to your stove:

- ✦ Local Function 🏠 - for control at home and its vicinity (garden, garage)
- ✦ Global Function 🌐 - for control from any place in the world

The stove connects to the home Wi-Fi through the WLAN module. If the Wi-Fi network is not available or the connection fails, the module will create its own hotspot. In such case only the Local Function is active. You just need to connect once for long-term use QUALITYTIMES.



HAAS+SOHN Application Comfortable control from a smartphone

Download your HAAS+SOHN application for free and start controlling your pellet stove. Simply, safely and comfortably.

- ✦ Optional for-set weekly program, up to 3 time intervals for 1 day
- ✦ Up to 5 family members can control one stove
- ✦ Up to 5 pellet stoves can be connected to one application
- ✦ The colour background of the application shows the operational mode of the stove (red - heating, blue - cooling, purple - switching off, green - ECO-Mode, grey - switched off)
- ✦ The application will remind you to add fuel, clean the stove or order a service
- ✦ It monitors average fuel consumption



Simple control

Comfortable and simple control with just four pushbuttons. Display with a well-arranged menu.



Large glazed area

You won't recognise that it is a pellet stove. The flame looks as if logs were burning inside.



Friendly for allergic persons thanks to the heat exchanger

Heated air is not blown into the room by a fan. The heat rises on its own, without vibrations or noise. You can fall asleep next to our pellet stove, breathing comfortably. Ideal for allergic persons.



Extremely quiet operation

You will barely hear the stove working.



Fully automatic temperature control

Simply set different temperatures for different times of the day. With an integrated room temperature sensor, the stove monitors the temperature in the room and heats to maintain the pre-set value. The pellet stove will recognise a temperature drop in the room and it will start heating it up. When it reaches the required temperature, it will reduce its output. There's no need to switch it on or off, just add pellets.




Gas tightness certified


A pellet stove with a gas tightness certificate complying with the EN 14785 standard. An ideal choice for low-energy, passive and thermally insulated houses. Blower-door test compliant. The stove draws 100% of the air needed for combustion from outside (external CPV intake). Thanks to this feature the combustion process is fully independent of the air in the room and the fire does not use oxygen in the house. If you are not using the stove, heat is not drawn out of the room.




HAAS+SOHN Application Comfortable control from a smartphone

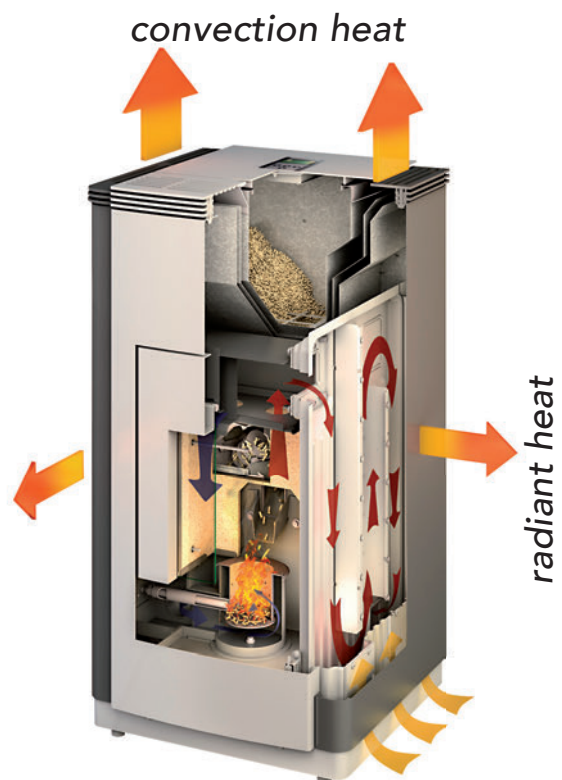




HSP 4 PARMA 
Page 12




HSP 4 PRATO 
Page 13




HSP 6 RUEDA RLU 
Page 14



HSP 6 RUEDA C RLU 
Page 15



HSP 6 TOLEDO IV 32 
Page 16




HSP 7 II 
Page 17



HSP 7 II GRANDE RLU 
Page 18



HSP 7 II GRANDE RLU
DE LUXE 
Page 19



HSP VIANO 
Page 20



HSP 4 PARMA

Highlights



Fast heating of air in the room



Colour touch screen and integrated WLAN module



WLAN
optional feature WLAN Local & Global



AIR
Double-Air function - can heat 2 rooms at the same time

Capacity	2.5-8.5 kW	
Efficiency	90%	A++
Heating ability	max. 153 m ³	
Dimensions h / w / d	1,208 / 563 / 578 mm	
Weight	207 kg	
Fuel consumption / h	1.9 kg	
Volume of pellet container	32 kg	
Chimney draught	12 Pa	
Fuel		
	Ø 60 mm	
		Ø 80 mm


Accessories you'll find on the end of the catalogue.



HSP 4 PARMA
white
0545508540000



HSP 4 PARMA
glossy black
0545508510000

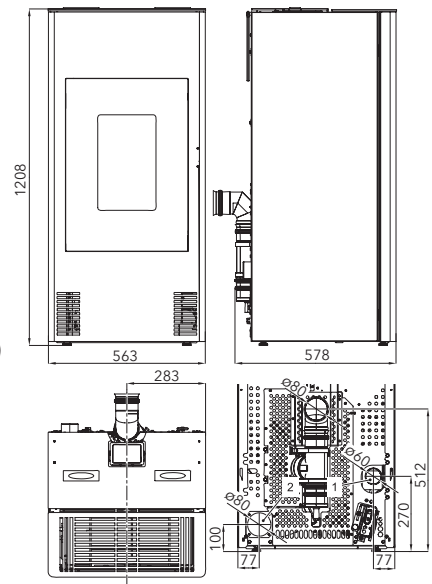



HSP 4 PRATO

Highlights



Fast heating of air in the room



Colour touch screen and integrated WLAN module



Simple operation using a mobile app



Double-Air function - can heat 2 rooms at the same time



HSP 4 PRATO
glossy black
0545908510000



HSP 4 PRATO
white
0545908540000




ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

Capacity	2.4-8.5 kW	
Efficiency	92%	A++
Heating ability	max. 153 m ³	
Dimensions h / w / d	1,210 / 540 / 556 mm	
Weight	184 kg	
Fuel consumption / h	1.9 kg	
Volume of pellet container	17 kg	
Chimney draught	12 Pa	
Fuel		
	Ø 60 mm	
		Ø 80 mm

Accessories you'll find on the end of the catalogue

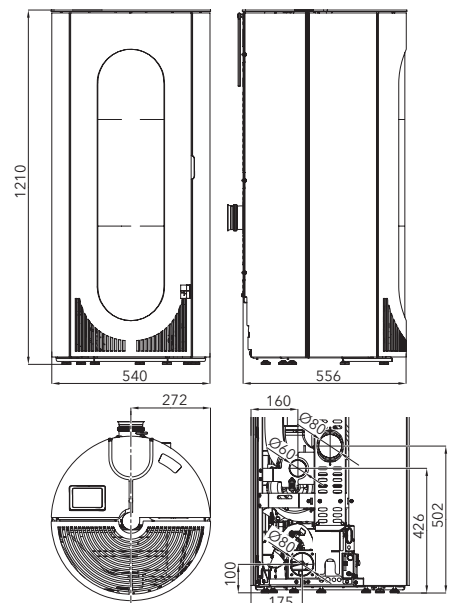

PELLET STOVES



HSP 6 RUEDA RLU

Highlights



WLAN
optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control
the optimum room temperature exactly when you need it



Gas tightness certified
does not require air from the room for combustion



Large glazed area

Capacity	2.4–8.3 kW	
Efficiency	90%	A+
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,201 / 550 / 500 mm	
Weight	122 kg	
Fuel consumption / h	1.94 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel	✂️	
↕	Ø 60 mm	↻ Ø 80 mm

Accessories you'll find on the end of the catalogue.



HSP 6 RUEDA RLU
anthracite, black ledges
0546532810000





HSP 6 RUEDA RLU
anthracite, white ledges
0546532830000



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

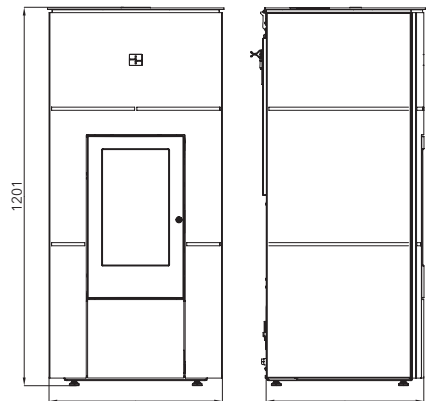



HSP 6 RUEDA C RLU

Highlights



WLAN
optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control
the optimum room temperature exactly when you need it



Gas tightness certified
does not require air from the room for combustion



Large glazed area

Capacity	2.4-8.3 kW
Efficiency	90% A+
Heating ability	max. 149 m ³
Dimensions h / w / d	1,201 / 560 / 513 mm
Weight	163 kg
Fuel consumption / h	1.94 kg
Volume of pellet container	32 kg
Chimney draught	11 Pa
Fuel	
Ø 60 mm	Ø 80 mm

Accessories you'll find on the end of the catalogue.



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove





HSP 6 RUEDA C RLU
anthracite, metallic tiles
0546532750000



HSP 6 RUEDA C RLU
anthracite, white tiles
0546532760000



HSP 6 RUEDA C RLU
anthracite, red patina tile*
0546532770000

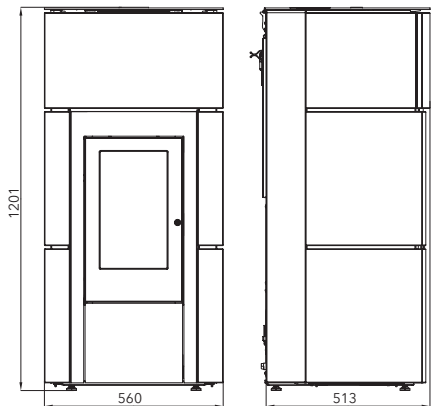

Tile - the colour may differ, or may contain hair cracks.

PELLET STOVES

*Offer valid until stocks last.



HSP 6 TOLEDO IV 32

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Friendly for allergic persons



Large glazed area



HSP 6 TOLEDO IV 32
anthracite, grey
0543408670000





ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

Capacity	2,4-8,3 kW	
Efficiency	90%	A+
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,201 / 544 / 499 mm	
Weight	118 kg	
Fuel consumption / h	1.9 kg	
Volume of pellet container	32 kg	
Chimney draught	11 Pa	
Fuel		
	Ø 60 mm	
		Ø 80 mm

Accessories you'll find on the end of the catalogue

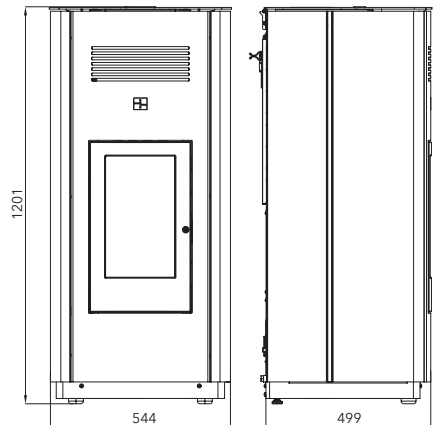



HSP 7 II

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Large glazed area



Friendly for allergic persons

Capacity	2.4–8.2 kW
Efficiency	90% A+
Heating ability	max. 148 m ³
Dimensions h / w / d	1,053 / 494 / 494 mm
Weight	126 kg
Fuel consumption / h	1.87 kg
Volume of pellet container	12 kg
Chimney draught	12 Pa
Fuel	
	Ø 60 mm
	Ø 80 mm

Accessories you'll find on the end of the catalogue.




HSP 7 II
black
0545008580000



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

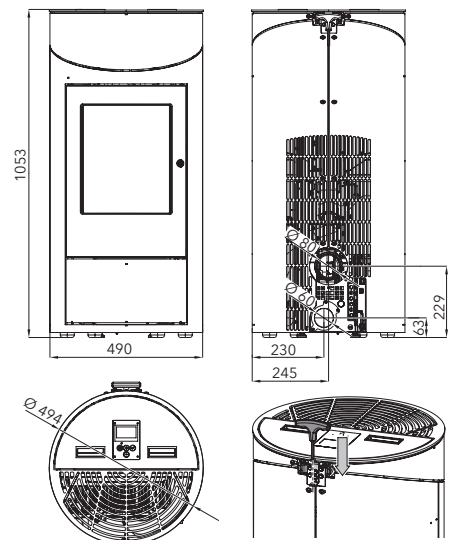

PELLET STOVES



HSP 7 II GRANDE RLU

Highlights



WLAN
optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control
the optimum room temperature exactly when you need it



Gas tightness certified
does not require air from the room for combustion



Large glazed area



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

Capacity	2.4-8.2 kW	
Efficiency	90%	A+
Heating ability	max. 148 m ³	
Dimensions h / w / d	1,173 / 494 / 494 mm	
Weight	132 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	17 kg	
Chimney draught	12 Pa	
Fuel		
	Ø 60 mm	
		Ø 80 mm

Accessories you'll find on the end of the catalogue.




HSP 7 II GRANDE RLU
black
0545108510000



HSP 7 II GRANDE RLU
white komaxit
0545108520000



HSP 7 II GRANDE RLU
grey
0545108500000

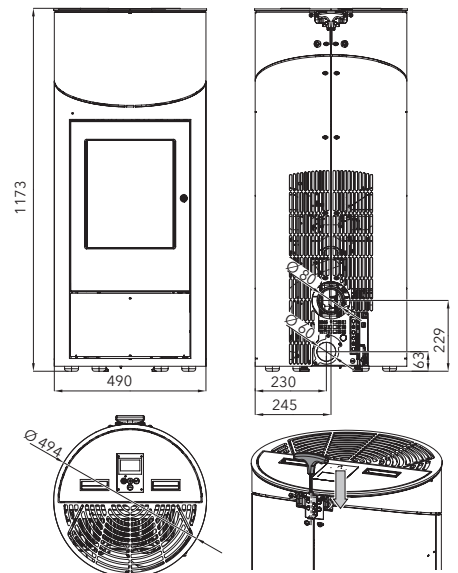



HSP 7 II GRANDE RLU DE LUXE

Highlights



WLAN
optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control
the optimum room temperature exactly when you need it



Gas tightness certified
does not require air from the room for combustion



Large glazed area

Capacity	2.4–8.2 kW	
Efficiency	90%	A+
Heating ability	max. 148 m ³	
Dimensions h / w / d	1,173 / 494 / 494 mm	
Weight	132 kg	
Fuel consumption / h	1.87 kg	
Volume of pellet container	17 kg	
Chimney draught	12 Pa	
Fuel		
	Ø 60 mm	
		Ø 80 mm

Accessories you'll find on the end of the catalogue.



HSP 7 II GRANDE RLU DE LUXE
red
0545108570000




HSP 7 II GRANDE RLU DE LUXE
glossy grey
0545108600000



ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



WLAN MODUL
is part of the stove

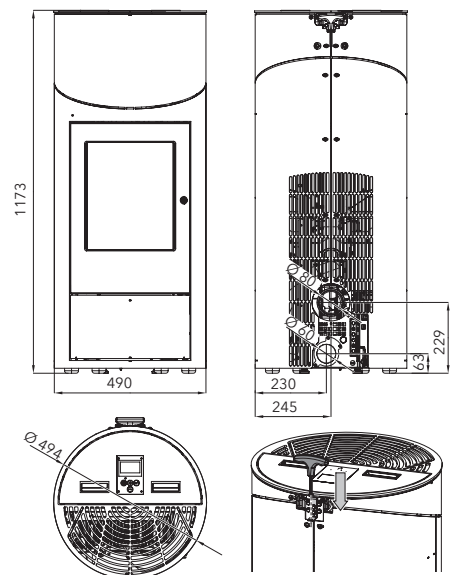

PELLET STOVES



HSP VIANO

Highlights



WLAN
optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control
the optimum room temperature exactly when you need it



Friendly for allergic persons



Large glazed area



HSP VIANO
anthracite, black
0571307520000





ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000




WLAN MODUL
is part of the stove

Capacity	2.4–8.6 kW	
Efficiency	90%	A+
Heating ability	max. 155 m ³	
Dimensions h / w / d	963 / 522 / 524 mm	
Weight	99 kg	
Fuel consumption / h	1.99 kg	
Volume of pellet container	17 kg	
Chimney draught	11 Pa	
Fuel		
	Ø 40 mm	Ø 80 mm

Accessories you'll find on the end of the catalogue.

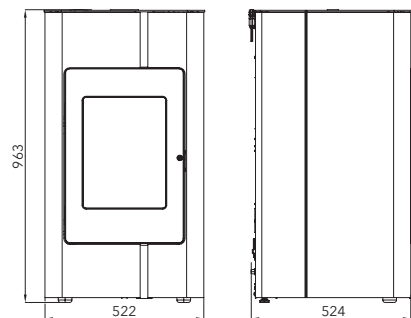



HSP 6 
with heat exchanger
Page 23



PELLET STOVES WITH HEAT EXCHANGER

smart heating



Smart heating with HAAS+SOHN

Enjoy heat from pellets throughout your house. The pellet stove with exchanger is connected to your central heating system and heats up the water in the radiators. You can use the control panel to simply adjust how much heat the stove transfers to the central heating system and how much heat is to be transferred directly to the air in your room. The stove monitors the pre-set temperature automatically and you can control it remotely using your mobile application. You do not need to chop wood for this pellet stove with exchanger. Just refill with pellets once every three days. The stove can be used as the main source of heat and it is great for transition periods (autumn, spring). Using pellets for your heating system will save you money in comparison with systems using direct heaters or electric boilers.

- ✦ direct room heating
- ✦ indirect heating of other rooms
- ✦ an economical and additional source of heat, great for transition periods
- ✦ 50% lower costs when compared with electric heating systems
- ✦ can be controlled from anywhere thanks to the mobile application

Exchanger

Transfers heat from the stove to your heating system. Up to 79% of the heat produced by the stove can be used to heat up the water in your system while the rest heats the air in the room. A pellet stove with a heat exchanger will heat your house or it can be used to heat up water for showering. It can be combined with solar panels, gas boilers or solid fuel boilers.

Notice: Pellet stoves with a heat exchanger cannot be used without being connected to your heating system (central heating system) The connection must be done by a professional company.

Patented heat exchanger cleaning technology

You can even clean the exchanger with the door closed. Clean the dirt from pipes by simply moving the wiping blade.


Hydraulic module

All you need to connect your stove to your central heating system is available and ready in a single module inside your stove. It will save you space and money.

It consists of:

- ✦ circulation pump,
- ✦ safety valve,
- ✦ three-way valve,
- ✦ aerating valve.

Supplied with a rear or lower outlet (floor connection).

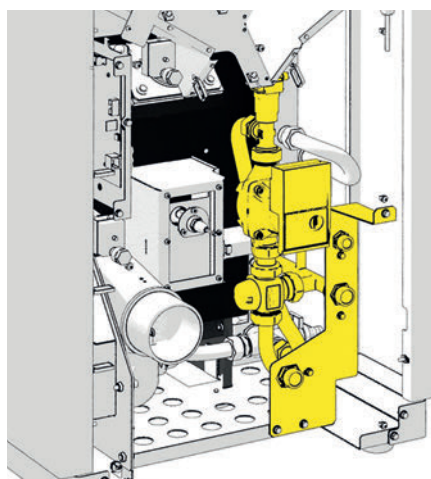



HSP 6 with heat exchanger

Highlights



WLAN

optional feature WLAN 🏠 Local & 🌐 Global



Fully automatic temperature control

the optimum room temperature exactly when you need it



Heat exchanger cleaning

simple and clean



Friendly for allergic persons



HSP 6
anthracite, black
0553808500000



HSP 6
anthracite, white
0553808510000



WLAN MODUL
is part of the stove





ROOM TEMPERATURE SENSOR
cable 8 m (not included)
0532007010000



HYDRAULIC MODULE
(not included)
0553808214000

Capacity (in heaters)	3.2-10.9 kW (6.8 kW)
Efficiency	93% A++
Heating ability	max. 196 m ³
Dimensions h / w / d	1,200 / 545 / 498 mm
Weight	178 kg
Fuel consumption / h	2.41 kg
Volume of pellet container	32 kg
Chimney draught	12 Pa
Fuel	
	Ø 60 mm
	Ø 80 mm

Accessories you'll find on the end of the catalogue.



PELLET STOVES WITH HEAT EXCHANGER

FIREPLACE STOVES

economical + efficient

YOUR BENEFITS

- + simple and safe operation
- + low amount of soot thanks to new combustion technologies, low cleaning effort
- + lower contamination by particles
- + maximum heating cost saving
- + increased efficiency - more heat with less wood
- + unobstructed view of the fire thanks to continuous front glass clearing

WOOD BURNING STOVES WITH MODERN TECHNOLOGY

Easy Control Air regulation

Easy Control will help you heat properly. You can control the air supply (primary, secondary, tertiary) into the hearth with a single controller.



1. Start

Press "Start" for sufficient air supply to make a fire until it starts burning evenly.



2. Heating

After starting the fire, turn the controller to the top "Burning" position for clean and efficient combustion.



3. Closing

When you decide to stop heating and the fire goes out, you can switch the controller to the "0" position to keep the heat inside the room. Thanks to the closable air supply, the heat from the fireplace stove remains inside the room and you can enjoy it longer.

**EASY
CONTROL**



Heat accumulation


For long-term radiation of heat.

After 2 hours of operation the stove radiates heat for 10 more hours.



Optional accessory for the ANTIC, AXON, FARO, LAROS, MOLDE, OVALIS and PISA RLU fireplace stove.

New HAAS+SOHN accumulation set made of magnesite has double accumulation capacity than steatite. You can add the accumulation set anytime later. The installation is very simple.

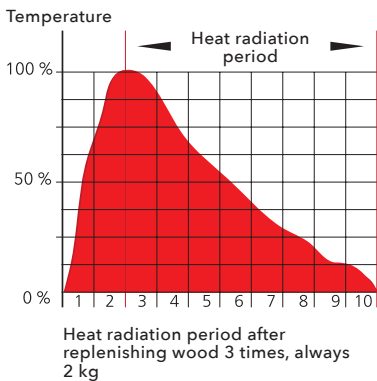


Heat accumulation graph:

After 2 hours of operation the stove radiates heat for 10 more hours.

Replaceable exchanger

You can add the exchanger to the stove anytime, or remove it and replace it with a blind flange. This allows additional connection to a heating system (central heating) or refitting to hot-air operation.

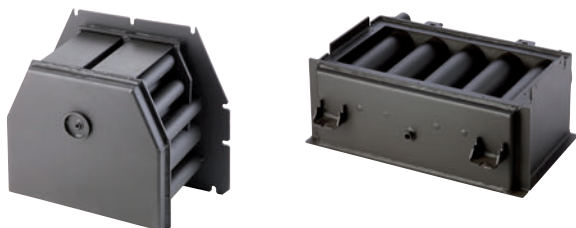

Closable Air Supply

If you don't use the stove for heating, you can close the air supply. This will prevent the escape of the warm air through the stove.

Tertiary combustion

Combustion releases flammable gases from the fuel. Thanks to tertiary combustion, the gases will not escape through the chimney but they will burn and transform into heat. Each log or briquette will be utilised completely. It means greater efficiency and lower fuel consumption.

External air supply (CPV)

Optional supply of air from outside. Inside you can breathe better because the stove doesn't burn air that has already been heated once. Ideal for houses with thermal insulation, necessary for passive and low-energy buildings.

Reflective glass

For greater efficiency of a heat exchanger. The reflective glass reflects heat back into the hearth. Therefore, more heat flows into the water in the exchanger and less into the room.

Enamel technology

Long-term resistance to scratches, easy to clean.

External air supply (CPV)

Optional supply of air from outside. Inside you can breathe better because the stove doesn't burn air that has already been heated once. Ideal for houses with thermal insulation, necessary for passive and low-energy buildings.

Gas tightness certified

A stove with a gas tightness certificate (issued by DIBt). An ideal choice for low-energy, passive and thermally insulated houses. Blower-door test compliant. The stove draws 100% of the air needed for combustion from outside (external CPV intake). Thanks to this feature, the combustion process is fully independent of the air in the room and the fire does not use the oxygen in the house. If you are not using the stove, the heat is not drawn out of the room via the stove. Therefore, the stove does not cause any heat loss.

Automatic door closing

Just release the door and it closes on its own.

Automatic secondary air control

The stove automatically controls the secondary air intake. Simply open the primary air intake before you start a fire. Once the fire starts burning you can close the primary air intake. The rest of the combustion process is controlled by the stove. Based on the available firewood, the stove adjusts the secondary air intake automatically to make sure that the combustion process is most efficient. This allows you to utilise the maximum amount of heat produced by each log while keeping emissions low.



ANTIC 
Page 28



ARKTIC
Page 29



ARKTIC 12 with hotplate
Page 30



AXON 
Page 31




ČIČMANY
Page 33



DALE 
Page 34



DALE with an oven 
Page 35



EBOLI
Page 36




EMPOLI
Page 37



FARO 
Page 38



FIREPOT 
Page 39




FORESTA
Page 40



JONSBO 
Page 41



JONSBO with an oven 
Page 42



LAROS 
Page 43




LEVANGER 
Page 44



LIRA 
Page 45



MADEIRA 
Page 46




MANTA 
Page 47




MOLDE 
Page 48



NORDBY 
Page 49




OVALIS Grande 
Page 50



OVALIS Piccolo 
Page 50



PINEROLO 
Page 51



PISA RLU
Page 52



SALERNO II 
Page 54



SARA
Page 55



SKARNES 
Page 56



SKIVE II 
Page 57



TREVISO MINI
Page 58



UKA 
Page 59



ANTIC

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

air supply directly to the flame saves fuel



External combustion air supply

ideal for low-energy houses



Heat accumulation

for long-term radiation of heat

Capacity	2.9-6.5 kW
Efficiency	80% A
Heating ability	max. 117 m ³
Dimensions h / w / d	1,171 / 540 / 579 mm
Weight	145 kg
Fuel consumption / h	1.9 kg
Chimney draught	12 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.




ANTIC
anthracite, white sides
0420915620000



ANTIC
anthracite, black
0420915610000



ACCUMULATION SET
53 kg (not included)
0420915500000

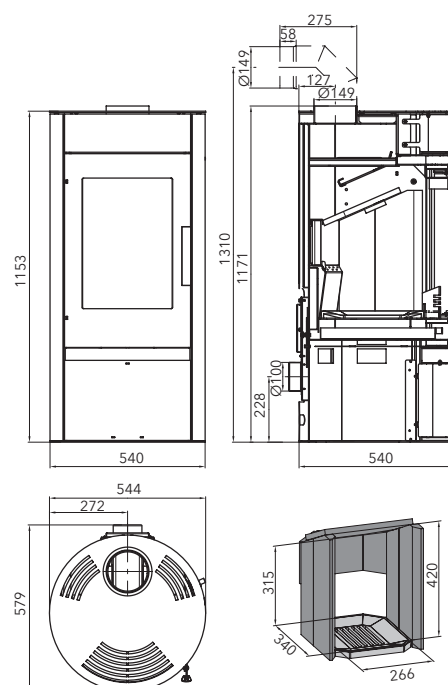

Available for purchase from our dealers.



ARKTIC

Highlights




Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3.3-12.1 kW
Efficiency	80% A
Heating ability	max. 218 m ³
Dimensions h / w / d	806 / 670 / 409 mm
Weight	92 kg
Fuel consumption / h	3.5 kg
Chimney draught	12 Pa
Fuel	50 cm
	Ø 150 mm Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.



ARKTIC
black
047031500000

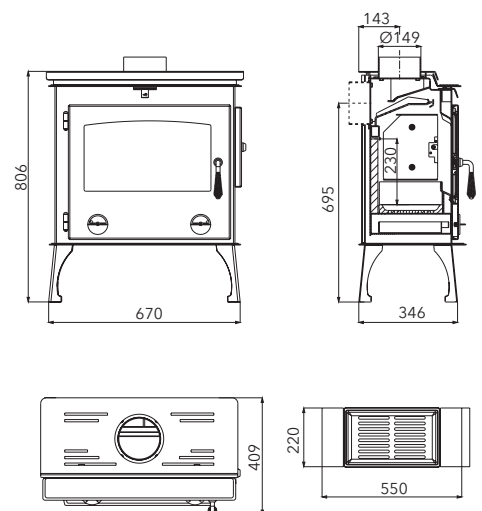

FIREPLACE STOVES



ARKTIC 12 with hotplate

Highlights



Tertiary combustion
air supply directly to the flame saves fuel




Replaceable exchanger
option of replacing the exchanger with a dummy plug

Capacity	4-12.3 kW
Efficiency	76% A
Heating ability	max. 218 m ³
Dimensions h / w / d	827 / 649 / 574 mm
Weight	132 kg
Fuel consumption / h	0.8-3.7 kg
Chimney draught	12 Pa
Fuel	50 cm
	Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.



ARKTIC 12 with hotplate
black
047061510000

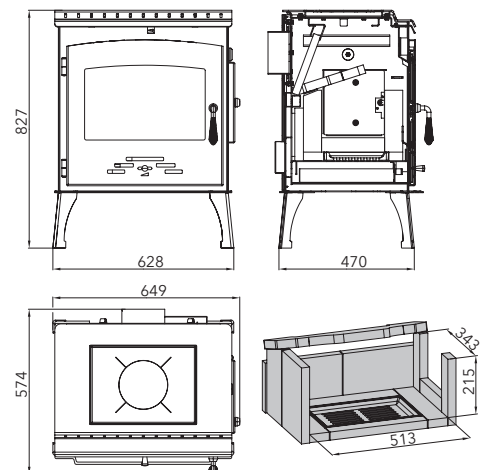



AXON

Highlights



Tertiary combustion
air supply directly to the flame
saves fuel




External combustion air supply
ideal for low-energy houses



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



Closable external air intake
central air intake closing system – no heat loss



ACCUMULATION SET FOR AXON
92 kg
(not included)
043312000099



SEAT
black
(not included)
0433120001135



AXON
black, right with lattice
043312000000

AXON
black, right without lattice
0433120010000







AXON
black, left without lattice
0433120100000

AXON
black, left with lattice
0433120110000

Capacity	3–7 kW		
Efficiency	82 %	A⁺	
Heating ability	max. 126 m ³		
Dimensions h / w / d	1254 / 858 / 379 mm		
Weight	165 kg		
Fuel consumption / h	2 kg		
Chimney draught	11 Pa		
Fuel	50 cm		
	Ø 100 mm		Ø 150 mm
	Ø 100 mm		

Accessories for stoves you'll find at the end of the catalogue.

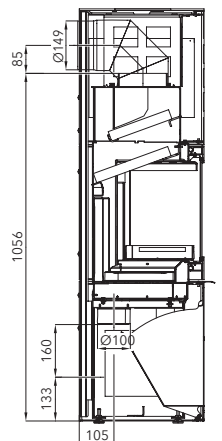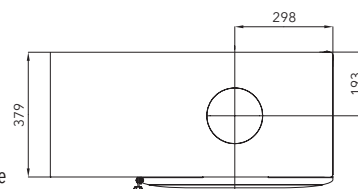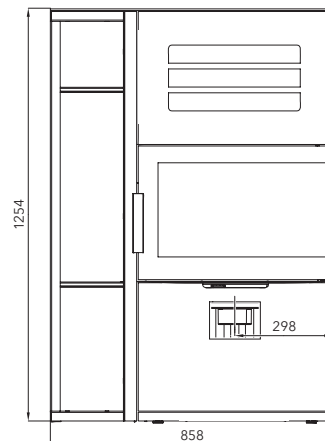

FIREPLACE STOVES

THE CHOICE IS UP TO YOU

Traditional or contemporary? It is up to you

We all like different things - different colours, different ornamentations, and we have different tastes. As like our fireplace stove offer. With us, everybody has a choice - rigorous minimalism, rustic style or traditional classic tiles. All stoves are certified by an independent authority and meet the requirements of the ECODESIGN 2022 related EU directives. But remember that in order for the stove to serve you well, it must first and foremost have the right capacity.

QUALITY TIMES

with our stove








ČIČMANY

DID YOU KNOW THAT ...?

Stove tiles are not the privilege of just fireplace stoves? You can also find them on pellet stoves. Moreover, they can have a modern and metallic design; you can choose more than the classic style.

Capacity	2-6.3 kW
Efficiency	80% A
Heating ability	max. 114 m ³
Dimensions h / w / d	956 / 669 / 356 mm
Weight	117 kg
Fuel consumption / h	1.83 kg
Chimney draught	12 Pa
Fuel	 33 cm 
	 Ø 130 mm


Accessories for stoves you'll find at the end of the catalogue.



ČIČMANY
black, ivory, olive
043432500000



ČIČMANY
black, ivory, brown
0434325010000

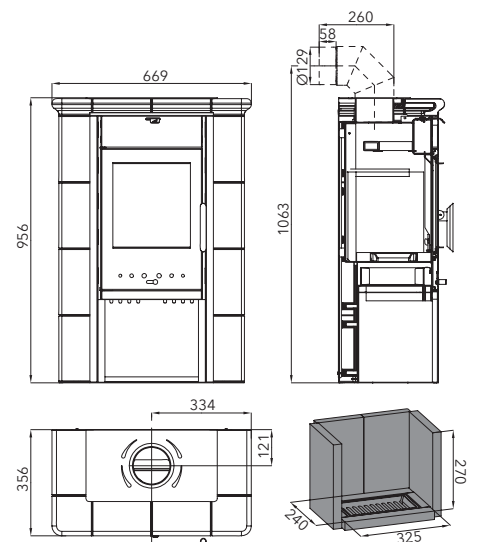

Tile - the colour may differ, or may contain hair cracks.



DALE

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses



Closable external air intake
central air intake closing system – no heat loss

Capacity	4.1–8.2 kW
Efficiency	80% A⁺
Heating ability	max. 147 m ³
Dimensions h / w / d	872 / 777 / 452 mm
Weight	153 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm
Ø 100 mm	Ø 150 mm

Accessories you'll find on the end of the catalogue.




DALE

black, stove tiles anthracite metallic
043471700000



DALE

black, red patina tile*
0434717010000

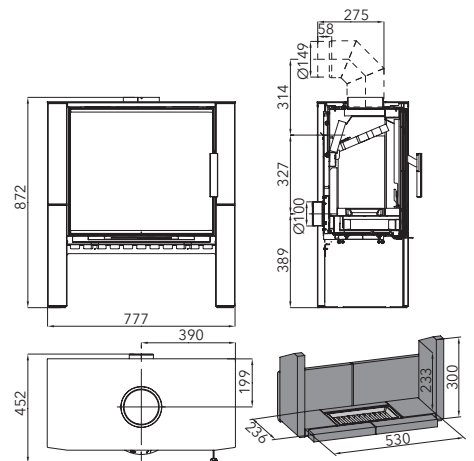

*Offer valid until stocks last.

Tile – the colour may differ, or may contain hair cracks.



DALE WITH AN OVEN

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses




Closable external air intake
central air intake closing system – no heat loss



DALE WITH AN OVEN
anthracite, tiles metallic
0434715360000

Capacity	4–8.1 kW
Efficiency	88% A
Heating ability	max. 146 m ³
Dimensions h / w / d	1,296 / 780 / 443 mm
Weight	231 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.

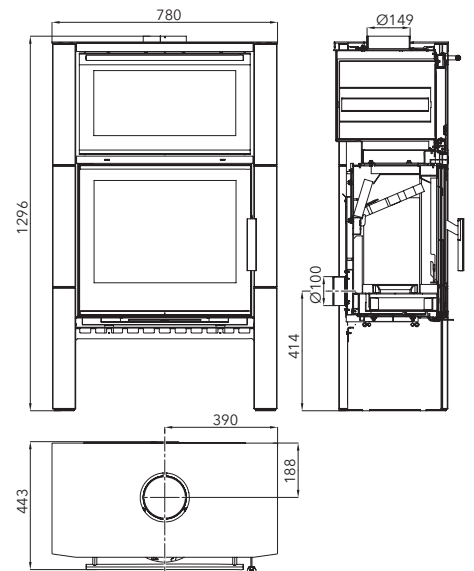

Oven dimensions
468 / 271 / 327 mm

Tile – the colour may differ, or may contain hair cracks.

FIREPLACE STOVES



EBOLI

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



EBOLI
black, tabak tile
0332215760000



EBOLI
black, caramel tile
0332215740000




EBOLI
black, green tile
0332215710000



EBOLI
black, brown tile
0332215700000

Capacity	2.6-8.4 kW
Efficiency	76% A
Heating ability	max. 144 m ³
Dimensions h / w / d	992 / 695 / 504 mm
Weight	156 kg
Fuel consumption / h	0.7-2.4 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 150 mm Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

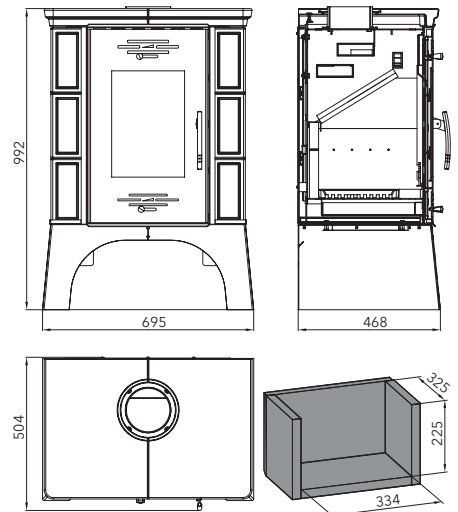

COVER CAP when using rear flue

- Tile colour tabak 0332215066103
- Tile colour caramel 0332215046103
- Tile colour green 0332215016103
- Tile colour brown 0332215006103

Tile - the colour may differ, or may contain hair cracks.



EMPOLI

Highlights



Tertiary combustion
air supply directly to the flame
saves fuel



EMPOLI
black, caramel tile
0332215640000



EMPOLI
black, brown tile
0332215600000




EMPOLI
black, bordeaux tile
0332215620000



EMPOLI
black, green tile
0332215610000

Capacity	2.6-8.4 kW
Efficiency	76 % A
Heating ability	max. 144 m ³
Dimensions h / w / d	992 / 695 / 504 mm
Weight	156 kg
Fuel consumption / h	0.7-2.4 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 150 mm Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

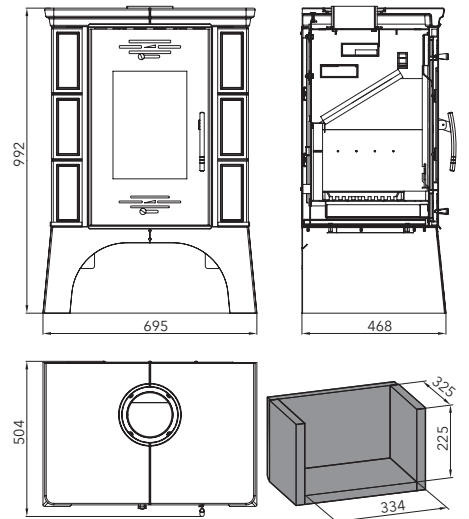

COVER CAP when using rear flue

- Tile colour caramel 0332215046103
- Tile colour brown 0332215006103
- Tile colour bordeaux 0332215026103
- Tile colour green 0332215016103

Tile - the colour may differ, or may contain hair cracks.

FIREPLACE STOVES



FARO

Highlights



Heat accumulation
for long-term radiation of heat



External combustion air supply
ideal for low-energy houses



Easy control
Easy control air inlet regulation
– easy air supply regulation
control with just one regulator



Closable external air intake
central air intake closing system – no heat
loss



FARO
black, honey cake
042463700000




FARO
black, green tile
042463701000



FARO
black, ivory
042463702000




FARO
black, brown tile
042463703000



ACCUMULATION SET
65 kg
(not included)
0424637001800

Capacity	3–6.3 kW		
Efficiency	80%	A⁺	
Heating ability	max. 113 m ³		
Dimensions h / w / d	1,100 / 745 / 451 mm		
Weight	169 kg		
Fuel consumption / h	1.9 kg		
Chimney draught	12 Pa		
Fuel	33 cm		
	∅ 100 mm		∅ 150 mm
	∅ 100 mm		∅ 150 mm

Accessories for stoves you'll find at the end of the catalogue.

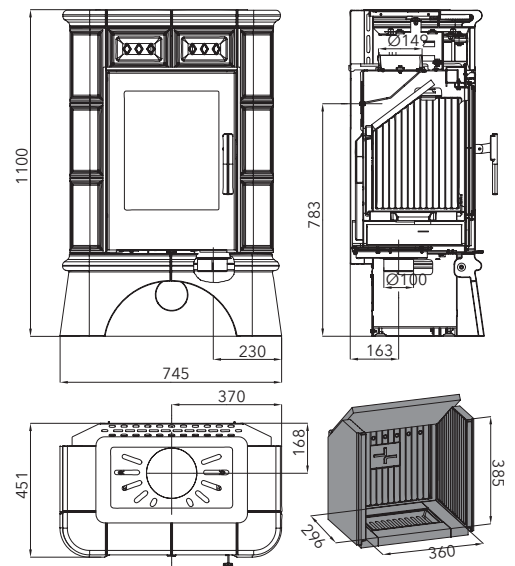

Tile – the colour may differ, or may contain hair cracks.



FIREPOT hob with glass-ceramic plate

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator







External combustion air supply

ideal for low-energy houses

DID YOU KNOW THAT ...?

You can also have a glass-ceramic plate on your wood-burning stove? With the FIREPOT wood-burning stove you have double the QUALITY TIMES, that is warmth with a view of the fire and a hob on which you can prepare your favourite food.

Capacity	3-6.4 kW	
Efficiency	81 %	A
Heating ability	max. 115 m ³	
Dimensions h / w / d	912 / 540 / 489 mm	
Weight	134 kg white, black 130 kg stainless	
Fuel consumption / h	1.9 kg	
Chimney draught	11 Pa	
Fuel	 33 cm	
 Ø 100 mm	 Ø 150 mm	
 Ø 100 mm		

Accessories for stoves you'll find at the end of the catalogue.




FIREPOT
black, white
glass-ceramic hob
0424618020000



FIREPOT
black
glass-ceramic hob
0424618010000



FIREPOT
black, stainless
glass-ceramic hob
0424618030000

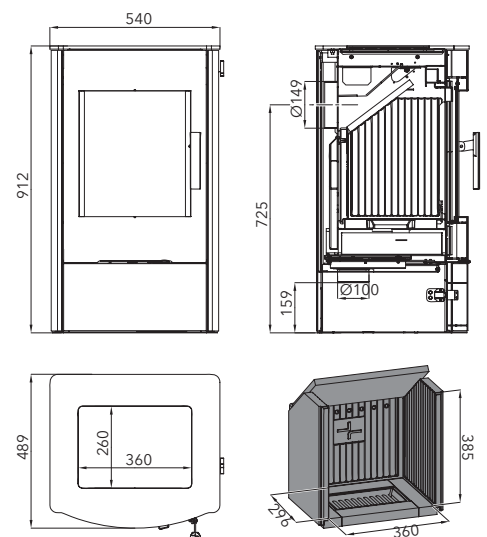

FIREPLACE STOVES



FORESTA

Highlights





Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion


air supply directly to the flame saves fuel

Capacity	2.7–8.1 kW
Efficiency	76% A
Heating ability	max. 146 m ³
Dimensions h / w / d	692 / 610 / 321 mm
Weight	72 kg
Fuel consumption / h	2.5 kg
Chimney draught	11 Pa
Fuel	 50 cm
	 Ø 120 mm

Accessories for stoves you'll find at the end of the catalogue.



FORESTA
black, wood décor tile
047081510000

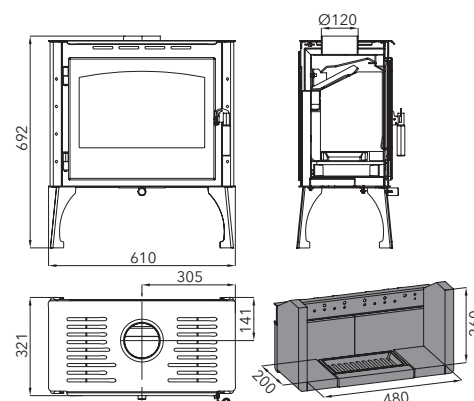

Floor tiles – colour may vary.



JONSBO

Highlights



Tertiary combustion
air supply directly to the flame
saves fuel



Easy control
Easy control air inlet regulation
- easy air supply regulation
control with just one regulator



External combustion air supply
ideal for low-energy houses



Closable external air intake
central air intake closing system
- no heat loss



JONSBO
black, Speckstein
0434716110000



JONSBO
black, ivory
0434716000000




JONSBO
black, grey
0434716010000



JONSBO
black,
Woodstone Prestige
0434716100000

Capacity	4.1-8.2 kW
Efficiency	80% A+
Heating ability	max. 147 m ³
Dimensions h / w / d (tile)	837 / 697 / 453 mm
Dimensions h / w / d (stone)	849 / 688 / 453 mm
Weight (tile / stone)	148 / 181 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm Ø 150 mm
Ø 100 mm	

Accessories for stoves you'll find at the end of the catalogue.

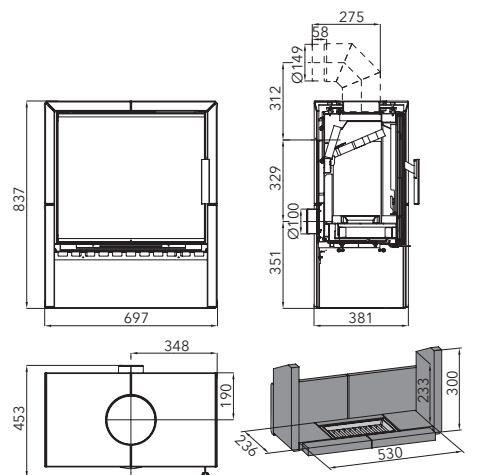

COVER CAP when using rear flue

- Tile colour grey 0434716005009
- Tile colour ivory 0434715035009
- Stone colour Speckstein 0434716111110
- Stone colour Woodstone 0434716101110

Tile - the colour may differ, or may contain hair cracks.
Natural stone - the colour/structure may differ.

FIREPLACE STOVES



JONSBO with an oven

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses




Closable external air intake
central air intake closing system – no heat loss

Capacity	4–8.1 kW	
Efficiency	88%	A⁺
Heating ability	max. 146 m ³	
Dimensions h / w / d	1,229 / 690 / 460 mm	
Weight	195 kg	
Fuel consumption / h	2.2 kg	
Chimney draught	12 Pa	
Fuel	50 cm	
Ø 100 mm		Ø 150 mm
Ø 100 mm		

Accessories for stoves you'll find at the end of the catalogue.



JONSBO
anthracite
0434715350000

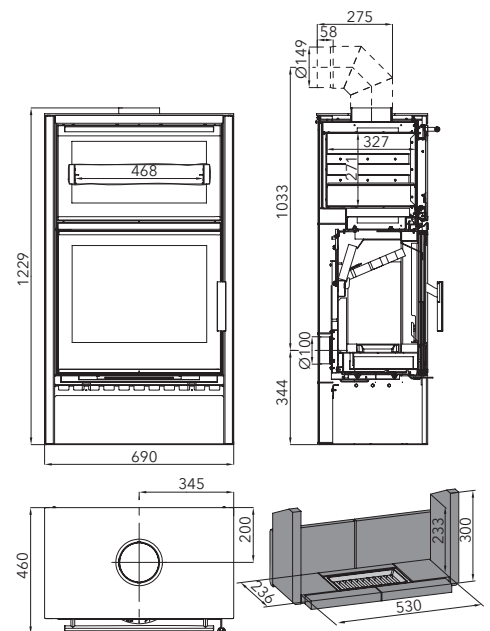

Oven dimensions
468 / 271 / 327 mm



LAROS

Highlights



Closable external air intake
central air intake closing system - no heat loss



Easy control
Easy control air inlet regulation - easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3-6.4 kW
Efficiency	81% A⁺
Heating ability	max. 115 m ³
Dimensions h / w / d (Piccolo)	964 / 589 / 482 mm
Dimensions h / w / d (Grande)	1,177 / 589 / 482 mm
Weight (Piccolo / Grande)	126 kg / 141 kg
Fuel consumption / h	1.9 kg
Chimney draught	11 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 150 mm
	Ø 150 mm
	Ø 100 mm

Accessories for stoves you'll find at the end of the catalogue.



LAROS PICCOLO
black, side sheet metal lining
042461750000



LAROS GRANDE
black, side sheet metal lining
042461740000




ACCUMULATION SET FOR LAROS GRANDE
57 kg
(not included)
0424617401000



BOTTOM DOOR LAROS PICCOLO
(not included)
0424617401330

LAROS GRANDE

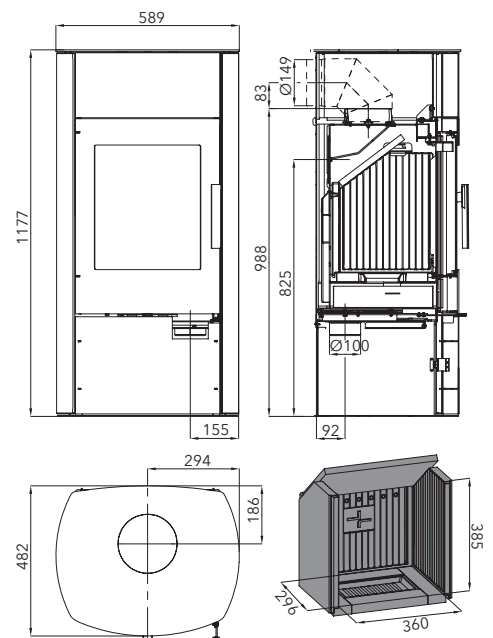

FIREPLACE STOVES



LEVANGER

Highlights



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses

Capacity	2-6.2 kW
Efficiency	77% A
Heating ability	max. 111 m ³
Dimensions h / w / d	900 / 490 / 401 mm
Weight	108 kg
Fuel consumption / h	1.8 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 130 mm
	Ø 130 mm

Accessories for stoves you'll find at the end of the catalogue.




LEVANGER
black
043481760000



EXTERNAL AIR INTAKE
(not included)
0434817001320



ADAPTOR 130/150
(not included)
0434815005450

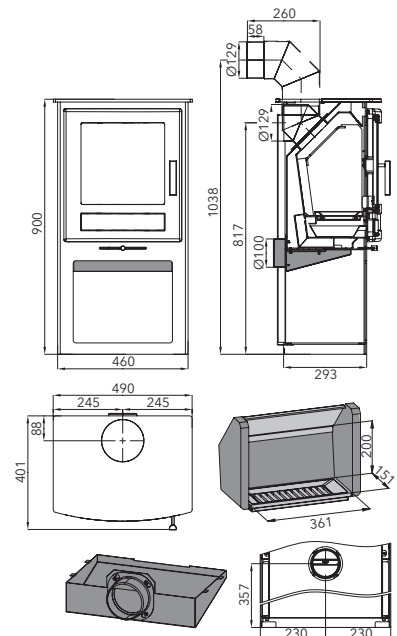



LIRA

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses

Capacity	2-6.2 kW
Efficiency	77 % A
Heating ability	max. 111 m ³
Dimensions h / w / d	575 / 460 / 350 mm
Weight	75 kg
Fuel consumption / h	1.8 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 130 mm
	Ø 130 mm

Accessories for stoves you'll find at the end of the catalogue.




LIRA
black
043481570000



EXTERNAL AIR INTAKE
(not included)
0434815701320



ADAPTOR 130/150
(not included)
0434815005450

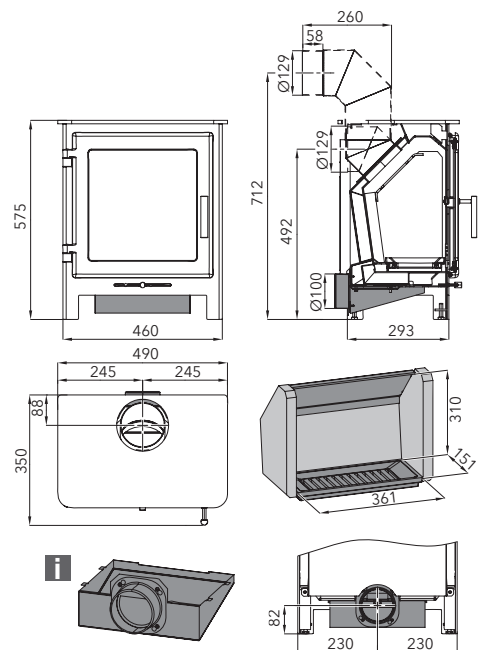

FIREPLACE STOVES



MADEIRA

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses







Closable external air intake

central air intake closing system – no heat loss



Tertiary combustion

air supply directly to the flame saves fuel

Capacity	3-6.4 kW
Efficiency	82% A+
Heating ability	max. 115 m ³
Dimensions h / w / d	996 / 606 / 530 mm
Weight (Speckstein / Woodstone)	136 kg / 130 kg
Fuel consumption / h	1.6 kg
Chimney draught	12 Pa
Fuel	 33 cm
 Ø 100 mm	 Ø 150 mm
	 Ø 150 mm


Accessories for stoves you'll find at the end of the catalogue.



MADEIRA
black, Speckstein antic
0429617520000



MADEIRA
black, Woodstone Prestige
0429617500000

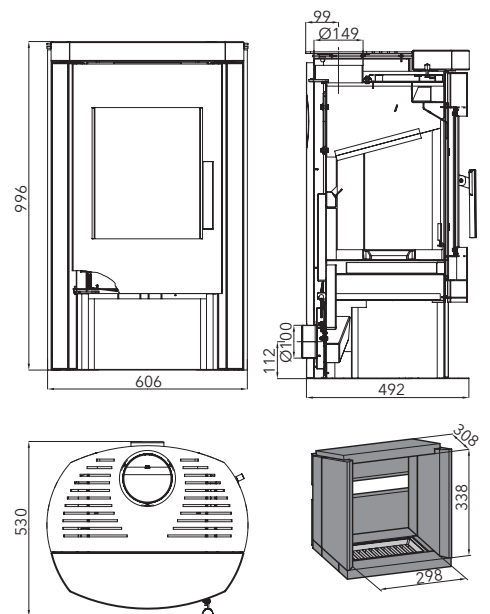

Natural stone – the colour/structure may differ.



MANTA tiled top plate + pedestal

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



External combustion air supply
ideal for low-energy houses

Capacity	2.3-7.2 kW
Efficiency	81% A⁺
Heating ability	max. 126 m ³
Dimensions h / w / d	856 / 740 / 547 mm
Weight	131 kg
Fuel consumption / h	2.2 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 150 mm
	Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

COVER CAP when using rear flue

- Tile colour green tile 0434215026111
- Tile colour brown tile 0434215006111
- Tile colour honey cake 0434215016111




MANTA
black, green tile
0434215020000



MANTA
black, brown tile
0434215000000



MANTA
black, honey cake
0434215010000

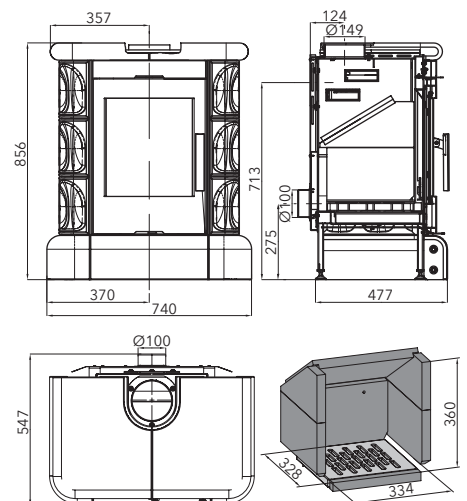

Tile - the colour may differ, or may contain hair cracks.

FIREPLACE STOVES



MOLDE

Highlights



Closable external air intake
central air intake closing system – no heat loss



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3-6.4 kW
Efficiency	81% A+
Heating ability	max. 115 m ³
Dimensions h / w / d	1,177 / 589 / 482 mm
Weight	233 kg
Fuel consumption / h	1.9 kg
Chimney draught	11 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm
Ø 100 mm	Ø 150 mm


Accessories you'll find on the end of the catalogue.




MOLDE
black, Denim blue
0424617430000



MOLDE
black, Kunststein Grau (poured concrete)
0424617420000



ACCUMULATION SET FOR MOLDE
57 kg (not included)
0424617401000

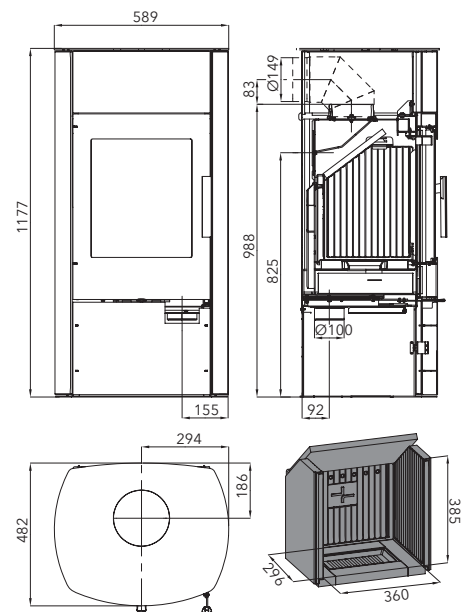

Natural stone – the colour/structure may differ.



NORDBY

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion

air supply directly to the flame saves fuel



External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss



WOOD BOX
black (not included)
042201760000








NORDBY
black, Denim blue
042201756000




NORDBY
black, Woodstone Prestige
042201750000



NORDBY
black, Speckstein antic*
042201751000

Capacity	2-6.4 kW
Efficiency	80% A
Heating ability	max. 113 m ³
Dimensions h / w / d	1,025 / 701 / 367 mm
Weight (Woodstone / Speckstein)	174 / 186 kg
Fuel consumption / h	1.8 kg
Chimney draught	11 Pa
Fuel	 33 cm 
 Ø 100 mm	 Ø 150 mm
	 Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

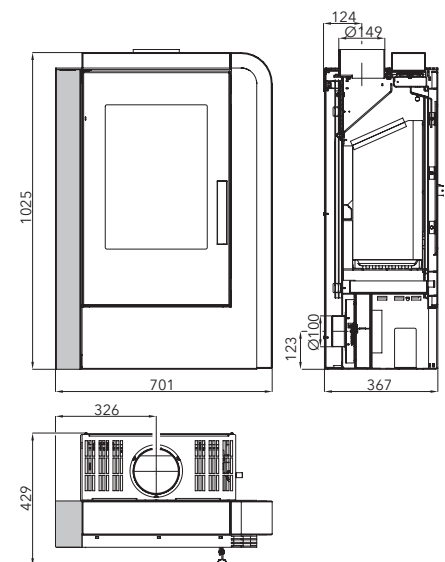

Natural stone – the colour/structure may differ.
*Offer valid until stocks last.

FIREPLACE STOVES



OVALIS

Highlights



Automatic secondary air control
easy and convenient control



Automatic door closing
just release the door and it closes on its own



External combustion air supply
ideal for low-energy houses



Heat accumulation
for long-term radiation of heat

Capacity	2.5-5.3 kW
Efficiency	81% A⁺
Heating ability	max. 95 m ³
Dimensions h / w / d Grande	1,552 / 464 / 487 mm
Dimensions h / w / d Piccolo	1,171 / 464 / 487 mm
Weight Grande	127 kg
Weight Piccolo	117 kg
Fuel consumption / h	1.5 kg
Chimney draught	12 Pa
Fuel	30 cm
	Ø 100 mm
	Ø 150 mm
	Ø 150 mm

Accessories you'll find on the end of the catalogue.



OVALIS GRANDE*
black
0428612620000



OVALIS PICCOLO*
black
0428612610000






ACCUMULATION SET FOR OVALIS GRANDE
70 kg (not included)
0428650500000

ACCUMULATION SET FOR OVALIS PICCOLO
46 kg (not included)
0428650600000



KNIE
for rear flue
Ø 150 mm, 90° (not included)
0332015007065

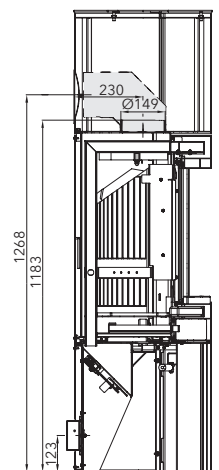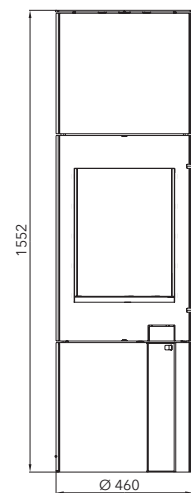

Available for purchase from our dealers.



PINEROLO

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss



Tertiary combustion

air supply directly to the flame saves fuel

Capacity	3-6.4 kW
Efficiency	82% A+
Heating ability	max. 115 m ³
Dimensions h / w / d	1,004 / 540 / 524 mm
Weight Speckstein	208 kg
Weight Woodstone	179 kg
Fuel consumption / h	1.5 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 150 mm
	Ø 150 mm


Accessories you'll find on the end of the catalogue.



PINEROLO
black, Woodstone Prestige
042941560000



PINEROLO
black, Speckstein
042941563000

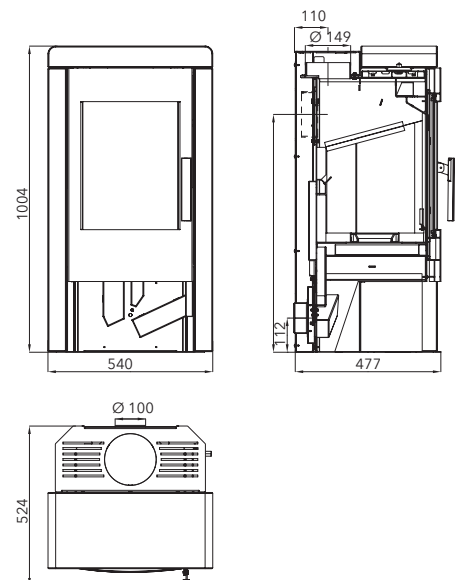

Natural stone – the colour/structure may differ.

FIREPLACE STOVES



PISA RLU

Highlights

RLU

Gas tightness certified
does not require air from the room for combustion

AUTO AIR

Automatic secondary air control
easy and convenient control

[]

Heat accumulation
for long-term radiation of heat

AUTO DOOR

Automatic door closing
just release the door and it closes on its own

Capacity	2.6–5.4 kW
Efficiency	87% A+
Heating ability	max. 97 m ³
Dimensions h / w / d	1,441 / 460 / 488 mm
Weight	122 kg
Fuel consumption / h	1.25 kg
Chimney draught	12 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm
Ø 150 mm	

Accessories you'll find on the end of the catalogue.




PISA RLU
black
0429112710000



ACCUMULATION SET FOR PISA RLU
70 kg (not included)
0428650500000



KNIE
for rear flue
Ø 150 mm (not included)
0332015007065

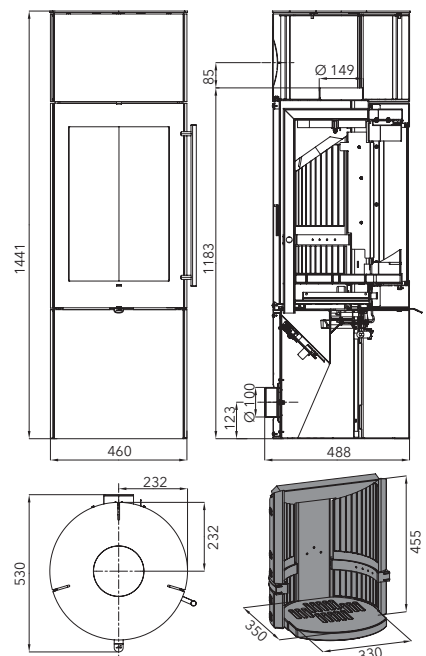





SALERNO II

Highlights



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion
air supply directly to the flame saves fuel



External combustion air supply
ideal for low-energy houses



Closable external air intake
central air intake closing system – no heat loss

Capacity	2.1–4.4 kW
Efficiency	84% A⁺
Heating ability	max. 79 m ³
Dimensions h / w / d (anthracite)	993 / 506 / 427 mm
Dimensions h / w / d (black)	984 / 512 / 427 mm
Weight	92 kg
Fuel consumption / h	1.1 kg
Chimney draught	12 Pa
Fuel	29 cm
	Ø 100 mm
	Ø 120 mm
	Ø 120 mm


Accessories for stoves you'll find at the end of the catalogue.



SALERNO II
anthracite, cast grey
0420414500000



SALERNO II
black, glass top plate
0420414580000

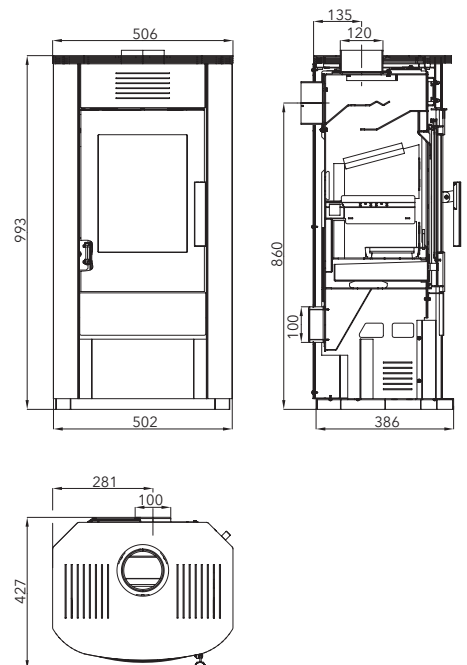





SARA

DID YOU KNOW THAT ...?

We're not only here for you before the selection and purchase of the fireplace, but also after. Our customer service team is ready to help you, whether your questions are about maintenance, prevention or ordering spare parts. Just write to poradna@haassohn.com.

Capacity	2-6.3 kW
Efficiency	80 % A
Heating ability	max. 114 m ³
Dimensions h / w / d	782 / 489 / 344 mm
Weight	91 kg
Fuel consumption / h	1.8 kg
Chimney draught	12 Pa
Fuel	 30 cm
	 Ø 130 mm


Accessories for stoves you'll find at the end of the catalogue.



SARA
black, honey cake
0434315010000



SARA
black, capuccino
0434315020000

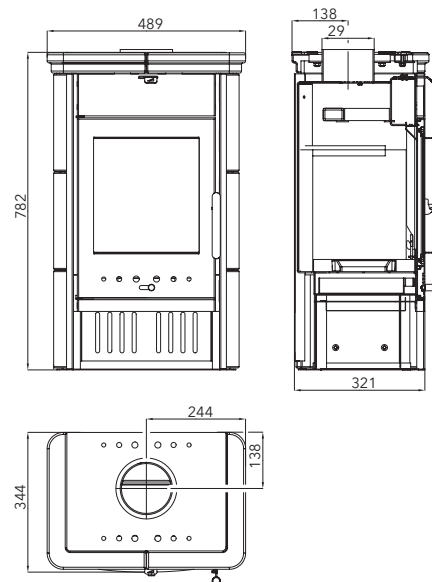

Tile - the colour may differ, or may contain hair cracks.



SKARNES

Highlights



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses

Capacity	2.7–8.3 kW	
Efficiency	75%	A
Heating ability	max. 149 m ³	
Dimensions h / w / d	900 / 595 / 412 mm	
Weight	126 kg	
Fuel consumption / h	2.5 kg	
Chimney draught	12 Pa	
Fuel	50 cm	
	\varnothing 100 mm	
	\varnothing 150 mm	
	\varnothing 150 mm	


Accessories for stoves you'll find at the end of the catalogue.



SKARNES
black
0434818600000



EXTERNAL AIR INTAKE
(not included)
0434818001320

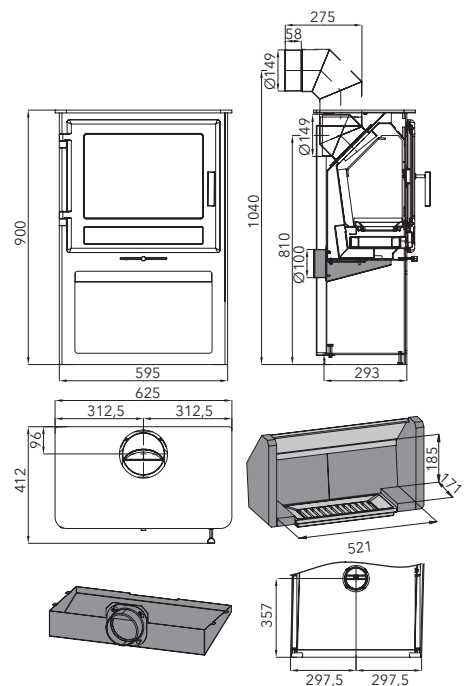



SKIVE II

Highlights



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



Tertiary combustion
air supply directly to the flame saves fuel



External combustion air supply
ideal for low-energy houses




Closable external air intake
central air intake closing system – no heat loss

Capacity	4–12.3 kW	
Efficiency	77%	A
Heating ability	max. 221 m ³	
Dimensions h / w / d	810 / 632 / 455 mm	
Weight	125 kg	
Fuel consumption / h	3.1 kg	
Chimney draught	12 Pa	
Fuel	50 cm	
	∅ 100 mm	
		∅ 150 mm
		∅ 150 mm
	∅ 100 mm	

Accessories for stoves you'll find at the end of the catalogue.



SKIVE II
black
0434715650000

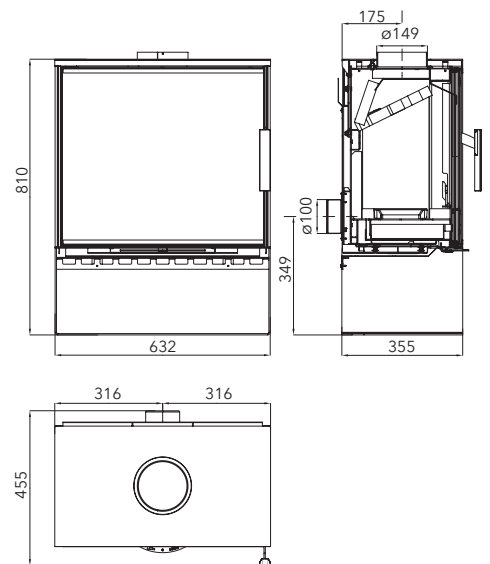

FIREPLACE STOVES



TREVISO MINI

DID YOU KNOW THAT ...?

Some components such as the gasket, fire-clay lining and grate wear over time and may deteriorate. They can still even be ordered as spare parts for models that are no longer in the current offer.

Capacity	2-6.3 kW
Efficiency	80% A
Heating ability	max. 114 m ³
Dimensions h / w / d	823 / 693 / 366 mm
Weight	115 kg
Fuel consumption / h	1.8 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 130 mm


Accessories for stoves you'll find at the end of the catalogue.



TREVISO MINI
black, green tile
043432000000



TREVISO MINI
black, ivory
043432001000

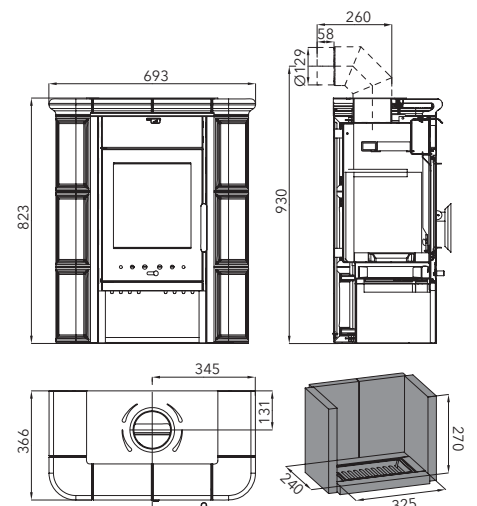

Tile - the colour may differ, or may contain hair cracks.



UKA

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses

Capacity	2-6.2 kW
Efficiency	77% A
Heating ability	max. 111 m ³
Dimensions h / w / d	625 / 460 / 401 mm
Weight	86 kg
Fuel consumption / h	1.8 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 130 mm
	Ø 130 mm

Accessories for stoves you'll find at the end of the catalogue.




UKA
black
043481510000



EXTERNAL AIR INTAKE
(not included)
0434817001320



ADAPTOR 130/150
(not included)
0434815005450

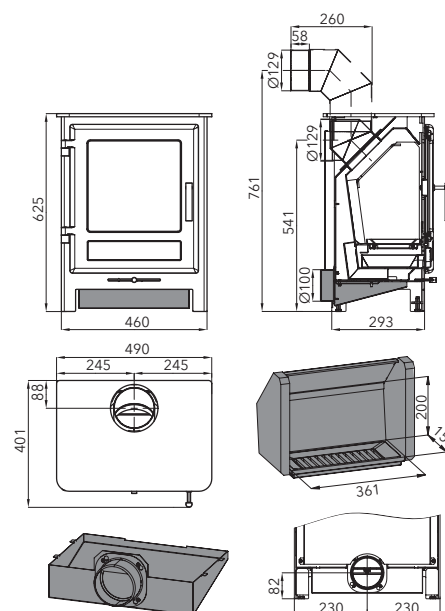

FIREPLACE STOVES

FOR COMFORTABLE HEATING OF THE ENTIRE HOUSE

Heat that you can see

There is nothing like having the entire house warm. And it is easy with a fireplace stove with a heat exchanger. As much as 70% of the capacity can be used to heat water circulating in heaters or stored in an accumulation tank. And you can read a book or watch the soothing play of the flames.



QUALITY TIMES
with our stove





ADRIA II
with heat exchanger
Page 64



ANDRUS
with heat exchanger
Page 65



AVESTA II
with heat exchanger
Page 66



EBOLI AL II
with heat exchanger
Page 67



EMPOLI AL II
with heat exchanger
Page 69



FARUM
with heat exchanger
Page 70



MANTOVA AL II
with heat exchanger
Page 71



NIVALA
with heat exchanger
Page 72




TREVISO II
with heat exchanger
Page 73



WERFEN 9
with heat exchanger
Page 74

FIREPLACE STOVES WITH HEAT EXCH.

smart heating

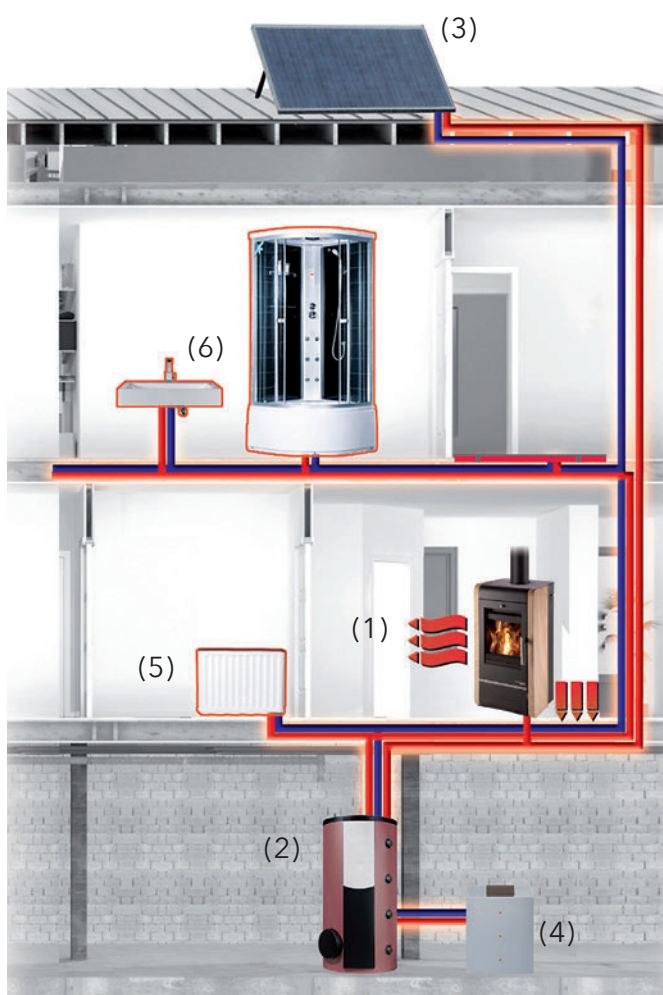

Part of the heat is used to heat the space in which the stove is installed (1). The rest is stored in the accumulation tank (2), which can also be supplied from other heat sources, e.g., boilers (4), solar panels (3). When needed, the heat from the tank can be supplied to the heating system (radiators) (5) or it can be used to heat water (6).

Warning:

The exchanger cannot be used without a connection to a heating system. Only a specialised company can make the connection.

Smart heating with HAAS+SOHN

A stove can be more than just an interior accessory, it can heat the entire house. Fireplace stoves with a heat exchanger can be connected to the central heating and heat the water in radiators. A quality warm-water heat exchanger can transfer 70% of the heat to water. Our stoves with exchangers have enough power to heat service water as well. A few logs can not only make you warm, but also prepare hot water for you.

Patented exchanger cleaning

Cleaning the exchanger is even easy with the door closed. You can remove the debris from the tubes simply by moving the wiper blade.

Replaceable heat exchanger


You can add the exchanger to the stove at any time, or remove it and replace it with a plug. This allows additional connection to a heating system (central heating) or refitting to hot-air operation.

Automatic controller of primary combustion air

Prevention of the stove from overheating after a power failure. After a power failure the circulating pump, which pumps water into the radiators, stops working. The heat accumulates in the exchanger and there's a risk of it overheating (the water temperature in the system is near boiling point). When the water in the exchanger reaches 95 °C, the thermostatic valve shuts off the primary air supply. This will reduce the combustion and prevent the temperature from increasing.

CONNECTION DIAGRAM WHEN USING UPS

**Informative diagram of the heating system.
Overheating protection during electrical power failure
by using an uninterrupter power supply (UPS).**

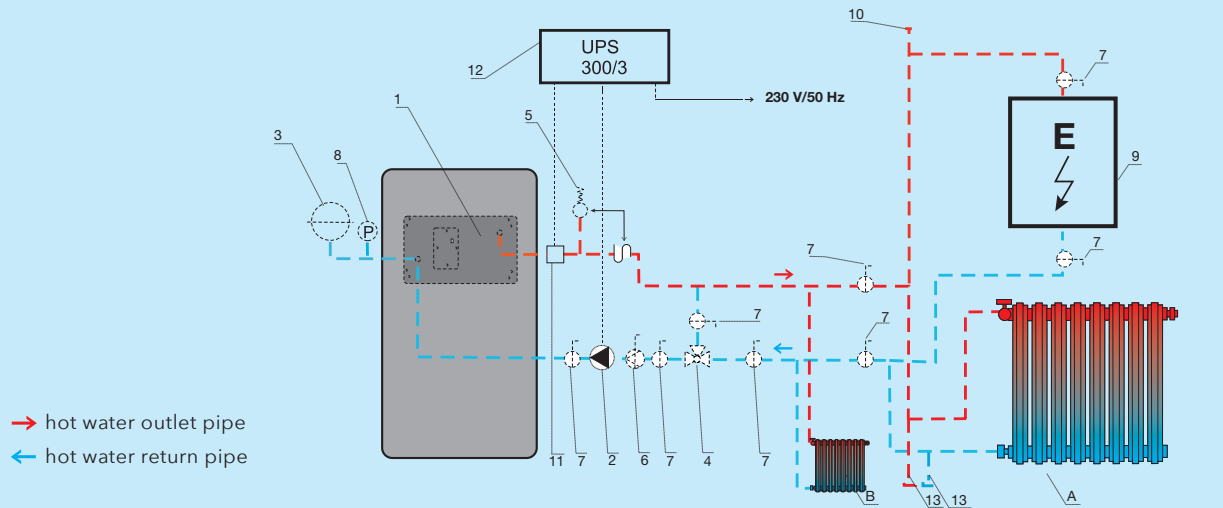


LEGEND:

- | | | |
|--|--------------------------|---|
| 1. fireplace stoves with exchanger | 5. pressure relief valve | 10. ventilation valve |
| 2. circulation pump | 6. closing filter | 11. attached thermostat |
| 3. expansion tank | 7. ball shut-off valve | 12. UPS ("backup power supply") |
| 4. thermo-regulation valve, e.g. ESBE TV 25 (60-75 °C) | 8. pressure gauge | 13. release vent |
| | 9. electric boiler | A. connection to the entire heating system |
| | | B. connection to part of the heating system |

DIAGRAM OF CONNECTION WITH COOLING LOOP

**Informative diagram of connection of the exchanger with the cooling loop
to the hot-water exchanger, against overheating in the event of an electrical power outage.**

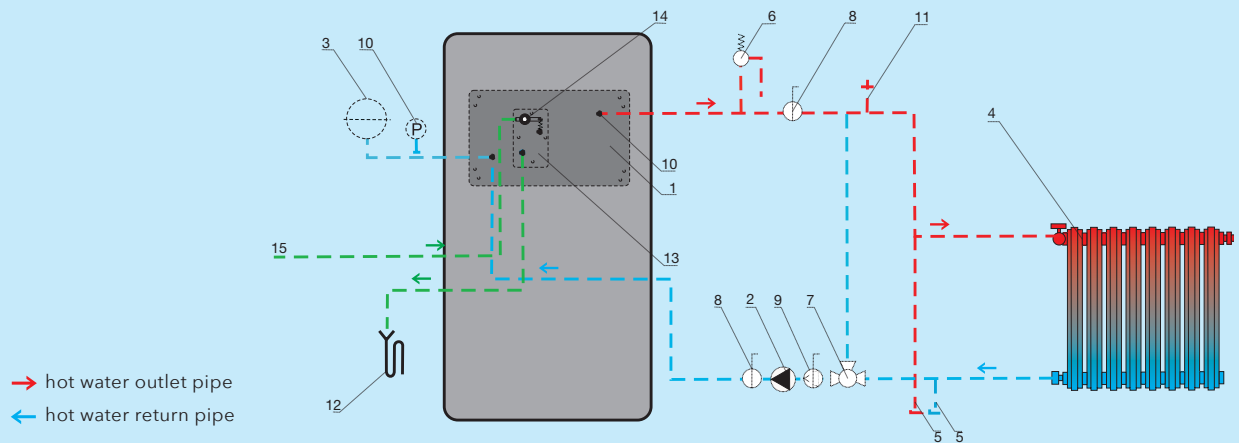

LEGEND:

- | | | |
|---------------------|--|----------------------------------|
| 1. exchanger | 6. pressure relief valve | 11. ventilation valve |
| 2. circulation pump | 7. thermo-regulation valve, e.g. ESBE TV 25 (60-75 °C) | 12. waste |
| 3. expansion tank | 8. ball shut-off valve | 13. cooling exchanger (loop) |
| 4. radiator | 9. BALL closing filter | 14. relief heat valve |
| 5. release vent | 10. pressure gauge | 15. connected to cold water line |



ADRIA II with heat exchanger

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



Replaceable exchanger
option of replacing the exchanger with a dummy plug



Cooling loop
protection from exchanger overheating
Not included (can be optionally added)

Capacity (in heaters)	3.4–10.5 kW (5 kW)
Efficiency	81% A⁺
Heating ability	max. 181 m ³
Dimensions h / w / d	1,050 / 560 / 442 mm
Weight	136 kg
Fuel consumption / h	2.9 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 150 mm


Accessories for stoves you'll find at the end of the catalogue.



ADRIA II
black, beige ceramics
043101500000



COOLING LOOP
(not included)
0436819005019

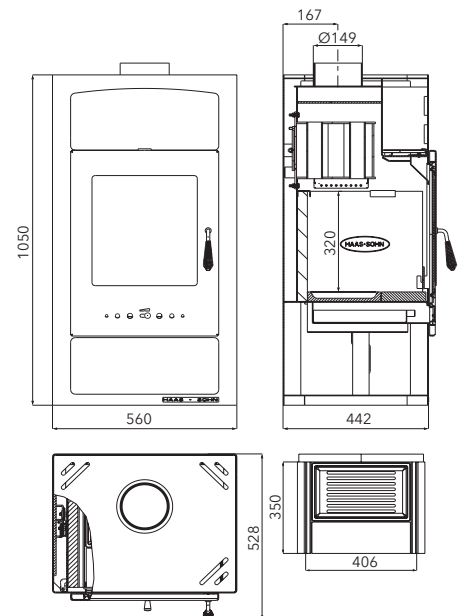

Floor tiles – colour may vary.



ANDRUS with heat exchanger

Highlights



Cooling loop

protection from exchanger overheating
Not included (can be optionally added)



Replaceable exchanger

option of replacing the exchanger with a dummy plug



External combustion air supply

ideal for low-energy houses



Automatic primary combustion air regulator

prevents problems during power outages

Capacity (in heaters)	5-14.9 kW (10.1 kW)
Efficiency	85% A+
Heating ability	max. 268 m ³
Dimensions h / w / d	1,202 / 620 / 632 mm
Weight	246 kg
Fuel consumption / h	4.1 kg
Chimney draught	12 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm


Accessories for stoves you'll find at the end of the catalogue.



ANDRUS
black, beige ceramics
043333700000



COOLING LOOP
(not included)
0432317006108

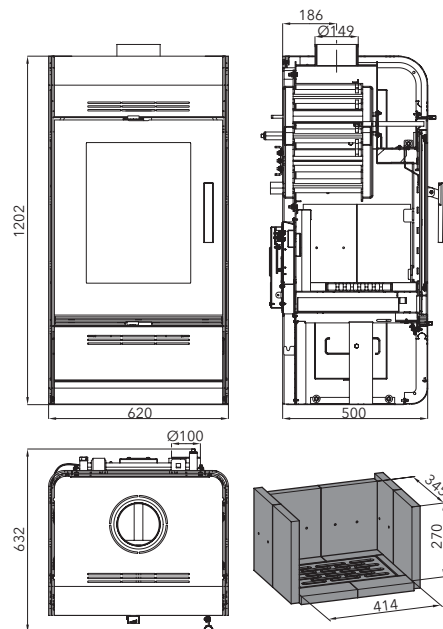

Floor tiles - colour may vary.

FIREPLACE STOVES WITH HEAT EXCHANGER



AVESTA II with heat exchanger

Highlights



Cooling loop

protection from exchanger overheating
Not included (can be optionally added)



Tertiary combustion

air supply directly to the flame saves fuel






Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

Capacity (in heaters)	3.3-10.2 kW (7.8 kW)
Efficiency	79% A
Heating ability	max. 184 m ³
Dimensions h / w / d	983 / 525 / 509 mm
Weight	196 kg
Fuel consumption / h	3.1 kg
Chimney draught	11 Pa
Fuel	 33 cm
 Ø 100 mm	 Ø 150 mm


Accessories for stoves you'll find at the end of the catalogue.



AVESTA II
black, Woodstone Prestige
043461760000



COOLING LOOP
(not included)
0434515006108

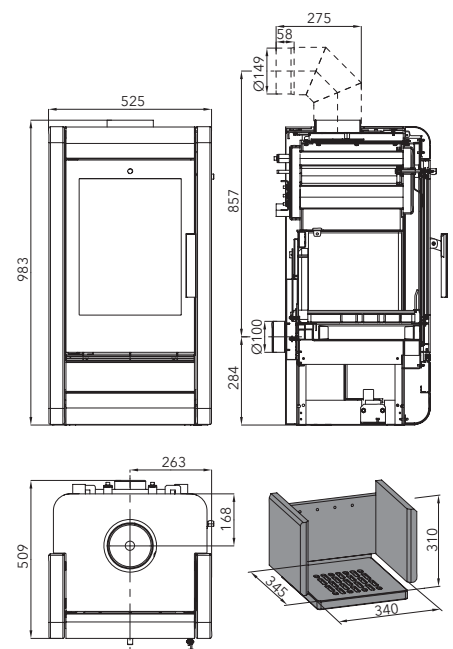

Natural stone – the colour/structure may differ.



EBOLI AL II with heat exchanger / cool. loop

Highlights



EXTRA AIR
Tertiary combustion air supply directly to the flame saves fuel



External combustion air supply
ideal for low-energy houses



STOP AIR PRIMARY
Automatic primary combustion air regulator prevents problems during power outages



Heat exchanger cleaning
simple and clean



EBOLI AL II
black, tobacco tile
0332315960000



EBOLI AL II
black, caramel tile
0332315940000




EBOLI AL II
black, green tile
0332315910000



EBOLI AL II
black, brown tile
0332315900000

Capacity (in heaters)	4-12.2 kW (8.5 kW)
Efficiency	82% A+
Heating ability	max. 218 m ³
Dimensions h / w / d	992 / 695 / 595 mm
Weight	166 kg
Fuel consumption / h	3.5 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 100 mm
	Ø 150 mm
	Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

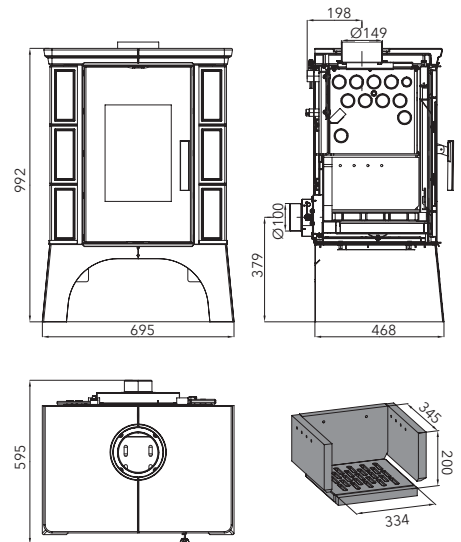

COVER CAP when using rear flue

- Tile colour tabak 0332215066103
- Tile colour caramel 0332215046103
- Tile colour green 0332215016103
- Tile colour brown 0332215006103

Tile - the colour may differ, or may contain hair cracks.

FIREPLACE STOVES WITH HEAT EXCHANGER

HEAT IN THE ENTIRE HOUSE

Practical self-sufficiency

Being the master of your own time is not always possible, but controlling the heat in your home is another matter. Stoves with an exchanger heat the entire space where the stove stands and other rooms through the heating system. You can heat water in the storage tank or conduct heat to the underfloor heating. It's completely up to you how you further use 'stored' heat.

QUALITY TIMES

with our stove





EMPOLI AL II with heat exchanger / cool. loop

Highlights



Tertiary combustion
air supply directly to the flame
saves fuel



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages



Heat exchanger cleaning
simple and clean



EMPOLI AL II
black, caramel tile
0332315840000



EMPOLI AL II
black, brown tile
0332315800000




EMPOLI AL II
black, bordeaux tile
0332315820000



EMPOLI AL II
black, green tile
0332315810000

Capacity (in heaters)	4-12.2 kW (8.5 kW)
Efficiency	82 % A⁺
Heating ability	max. 218 m ³
Dimensions h / w / d	992 / 695 / 595 mm
Weight	166 kg
Fuel consumption / h	3.5 kg
Chimney draught	12 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

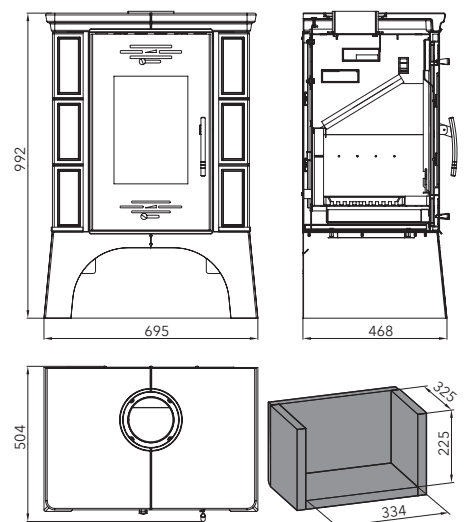

COVER CAP when using rear flue

- Tile colour caramel 0332215046103
- Tile colour brown 0332215006103
- Tile colour bordeaux 0332215026103
- Tile colour green 0332215016103

Tile - the colour may differ, or may contain hair cracks.

FIREPLACE STOVES WITH HEAT EXCHANGER



FARUM

Highlights



Automatic primary combustion air regulator
prevents problems during power outages



Replaceable exchanger
option of replacing the exchanger with a dummy plug



Cooling loop
protection from exchanger overheating



External combustion air supply
ideal for low-energy houses



COOLING LOOP
(not included)
0432317006108

Capacity (in heaters)	5-14.9 kW (10.1 kW)
Efficiency	85% A+
Heating ability	max. 268 m ³
Dimensions h / w / d	1,217 / 624 / 632 mm
Weight	264 kg
Fuel consumption / h	4.1 kg
Chimney draught	12 Pa
Fuel	33 cm
Ø 100 mm	Ø 150 mm


Accessories you'll find on the end of the catalogue.



FARUM
black, Woodstone Prestige
043343700000



FARUM
black, Speckstein
0433437100000

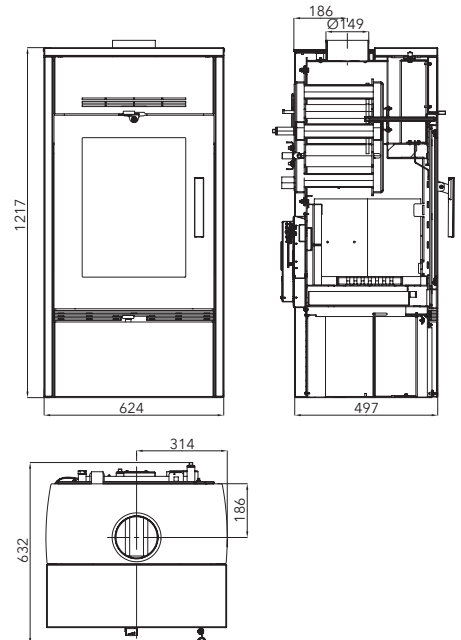

Natural stone - the colour/structure may differ.



MANTOVA AL II with heat exchanger

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



External combustion air supply
ideal for low-energy houses



Heat exchanger cleaning
simple and clean

Capacity (in heaters)	3.3-10 kW (7.4 kW)
Efficiency	80% A
Heating ability	max. 181 m ³
Dimensions h / w / d	962 / 506 / 595 mm
Weight (tile / sheet)	134 / 128 kg
Fuel consumption / h	2.7 kg
Chimney draught	12 Pa
Fuel	
	Ø 100 mm
	Ø 150 mm
	Ø 150 mm


Accessories for stoves you'll find at the end of the catalogue.



MANTOVA AL II
anthracite, silver door
043371510000



MANTOVA AL II
black, beige ceramics
043371515000

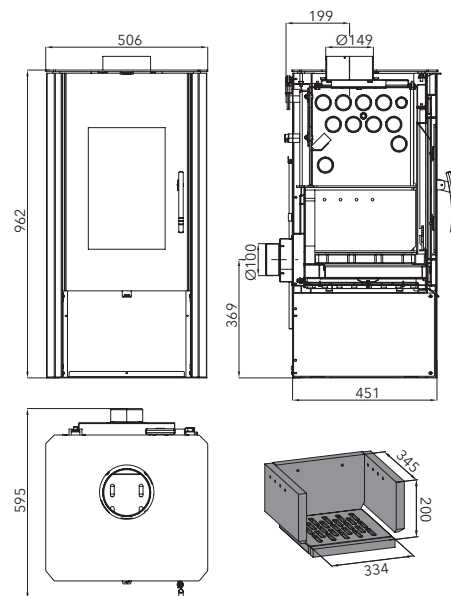

Floor tiles - colour may vary.

FIREPLACE STOVES WITH HEAT EXCHANGER



NIVALA with heat exchanger

Highlights



Cooling loop

protection from exchanger overheating
Not included (can be optionally added)



Replaceable exchanger

option of replacing the exchanger with a dummy plug







External combustion air supply

ideal for low-energy houses



Automatic primary combustion air regulator

prevents problems during power outages

Capacity (in heaters)	5-15.3 kW (10.1 kW)
Efficiency	85% A⁺
Heating ability	max. 268 m ³
Dimensions h / w / d	1,231 / 621 / 629 mm
Weight	221 kg
Fuel consumption / h	4.1 kg
Chimney draught	12 Pa
Fuel	 33 cm 
 Ø 100 mm	 Ø 150 mm


Accessories for stoves you'll find at the end of the catalogue.



NIVALA
anthracite, grey ceramics
0432337010000



NIVALA
black, beige ceramics
0432337000000

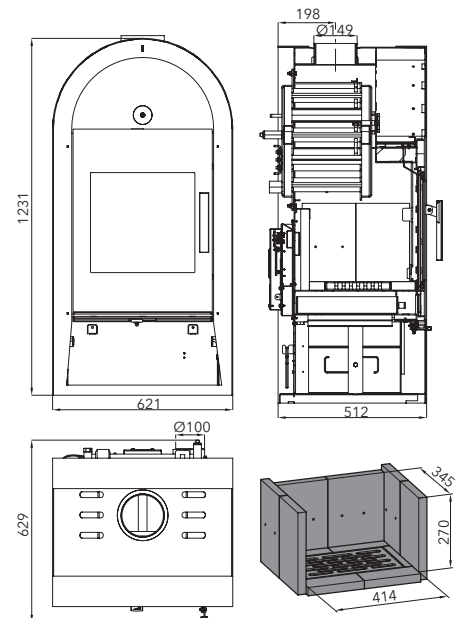

COOLING LOOP
(not included)

0432317006108

Floor tiles - colour may vary.



TREVISO II with heat exchanger / tiled pedestal

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



Cooling loop
protection from exchanger overheating
Not included (can be optionally added)



Replaceable exchanger
option of replacing the exchanger with a dummy plug



TREVISO II
black, honey cake
0433930020000



TREVISO II
black, green tile
0433930000000




TREVISO II
black, brown tile
0433930010000



TREVISO II
black, ivory
0433930030000

Capacity (in heaters)	2.7-8.2 kW (5 kW)
Efficiency	80% A
Heating ability	max. 143 m ³
Dimensions h / w / d	1,100 / 746 / 483 mm
Weight	203 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 150 mm

Accessories for stoves you'll find at the end of the catalogue.

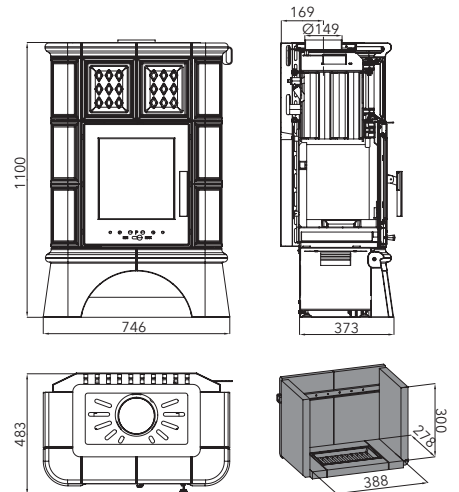

COOLING LOOP
(not included)
0332015005029

Tile - the colour may differ, or may contain hair cracks.

FIREPLACE STOVES WITH HEAT EXCHANGER



WERFEN 9 with heat exchanger

Highlights



Cooling loop

protection from exchanger overheating
Not included (can be optionally added)



Replaceable exchanger

option of replacing the exchanger with a dummy plug



Heat exchanger cleaning

simple and clean



External combustion air supply

ideal for low-energy houses

Capacity (in heaters)	4-12.2 kW (8.4 kW)
Efficiency	80% A
Heating ability	max. 220 m ³
Dimensions h / w / d	1,022 / 661 / 656 mm
Weight	221 kg
Fuel consumption / h	3.6 kg
Chimney draught	11 Pa
Fuel	50 cm
Ø 100 mm	Ø 160 mm


Accessories for stoves you'll find at the end of the catalogue.



WERFEN 9
black, cast iron door
0419018150000



COOLING LOOP
(not included)
0419018155018

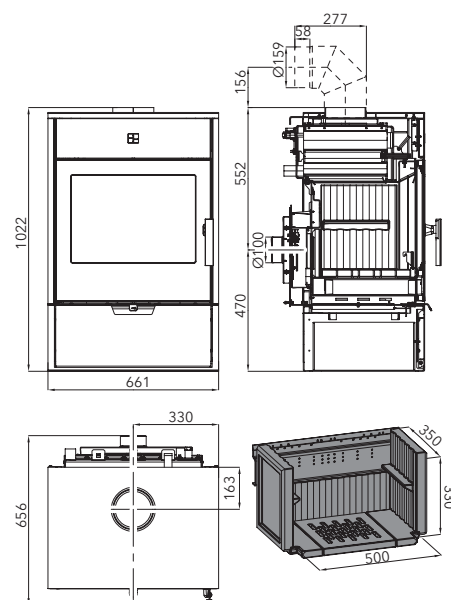






HEAT EXCHANGERS, CAPS, COOLING LOOPS

HEAT EXCHANGERS			
	ANDRUS FARUM	NIVALA	NOVARA
Order nr.	0432317006101	0432317001105	0618018073200

HEAT EXCHANGERS						
	TREVISO	VESTRE MARMA ADRIA II	VESUVIO II 10 kW/1S, 12 kW/2S	VESUVIO II 13 kW/1S, 15 kW/2S	WERFEN 9	MATERA
Order nr.	0332015006100	0426837117000	0619018156050	0619018206050	0419018205050	0435215005050

CAPS						
	ANDRUS FARUM	NIVALA	TREVISO II	VESTRE MARMA ADRIA II	VESUVIO II	WERFEN 9 MATERA
Order nr.	0432317005700	0432317006700	0433900005000	0426817106011	0619018155150	0435215005060

COOLING LOOP						
	ANDRUS FARUM NIVALA	ADRIA II MARMA VESTRE BERGAMO	TREVISO TREVISO II	ALMO ALYTUS AVESTA BRYNE SAVONA VISBY	VESUVIO II WERFEN 9 MATERA	
Order nr.	0432317006108	0436819005019	0332015005029	0434515006108	0619018156017	0419018155018

FIREPLACE STOVES WITH HEAT EXCHANGER



FIREPLACES

real heat

YOUR BENEFITS

- + The thermal radiation will last longer thanks to heat accumulation
- + The fireplace kit can be painted individually
- + Optional fire protection kit Fireplaces - real heat

DESIGN YOUR OWN FIREPLACE!

A crackling, cosy open fire and pleasant heat in the room - enjoy the "luxury" of your own fireplace. You can adapt our fireplace set so that the colour will match your living area.

EXAMPLE OF AN ASCIM CASING



Determine the fireplace location and mark its outline. (1)



Fit the fire protection on the fireplace insert (special accessory). (2)



Position the fireplace insert with a spirit level. (3)



Just follow the supplied guide and assemble all the parts. Fix them in place with the acrylic glue. (4 + 5)




We supply the enclosure in a raw state. You can coat it with any interior paint. (6)

Step by step (follow us on YouTube) [YouTube @haassohnrukov.s.r.o.](https://www.youtube.com/@haassohnrukov.s.r.o.)



ADONIS II 
Page 78



ALBERG 
Page 79



ASCIM II 
Page 80



DACHSTEIN 
Page 81



LEVI 
Page 82



JONAVA IV 
Page 83



LEVI 
Page 84




MALVIK IV 
Page 85




SKARA 
Page 86



SOHO 
Page 88



NOVARA 17 
with heat exchanger
Page 89





ADONIS II insert: Jonava IV

Highlights



External combustion air supply
ideal for low-energy houses



Enamel technology

Capacity	3.9–8.3 kW	
Efficiency	80%	A
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,510 / 1,452 / 750 mm	
Weight	448 kg	
Fuel consumption / h	2.3 kg	
Chimney draught	12 Pa	
Fuel	50 cm	
	Ø 180 mm	Ø 180 mm
Ø 100 mm		

Accessories you'll find on the end of the catalogue.



ADONIS II
0601800620000

FIRE FIGHTING PROTECTION (not included) 0638000500000


Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection: min. 1,210 mm, chimney flue diameter 180 mm

Delivery on 2 pallets
(9 parts + hearth lining).

WOOD BOX (not included) 0658000510000

Option of adding a wood bin.

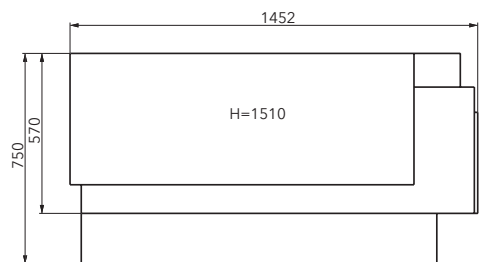

Illustrative photo = Lightweight concrete casing is delivered unpainted. Normally supplied without a wood bin.



ARLBERG insert: Jonava IV

Highlights



External combustion air supply
ideal for low-energy houses



Enamel technology




ARLBERG
0601800850000

Illustrative photo - Lightweight concrete casing is delivered unpainted.

Capacity	3.9-8.3 kW	
Efficiency	80%	A
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,610 / 1434 / 577 mm	
Weight	464 kg	
Fuel consumption / h	2.3 kg	
Chimney draught	12 Pa	
Fuel	45 cm	
	Ø 180 mm	Ø 180 mm
Ø 100 mm		

Accessories for stoves you'll find at the end of the catalogue.

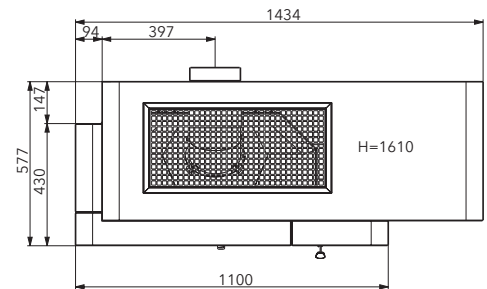

FIRE FIGHTING PROTECTION

(not included)

0638000500000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection:
min. 1,310 mm,
chimney flue diameter
180 mm.

Delivery on 2 pallets
(9 parts + hearth lining).

FIREPLACE SETS AND FIREPLACE INSERTS



ASCIM II insert: Malvik IV

Highlights




External combustion air supply
ideal for low-energy houses

Capacity	3.4–7.5 kW	
Efficiency	80%	A
Heating ability	max. 135 m ³	
Dimensions h / w / d	1,530 / 1,020 / 700 mm	
Weight	425 kg	
Fuel consumption / h	2 kg	
Chimney draught	12 Pa	
Fuel	33 cm	
	Ø 160 mm	Ø 160 mm
Ø 100 mm		

Accessories for stoves you'll find at the end of the catalogue.



ASCIM II
0601851120000




FIRE FIGHTING PROTECTION (not included)

0631851000000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection:
min. 1,230 mm,
chimney flue diameter
160 mm.

Delivery on 2 pallets
(8 parts + hearth lining).

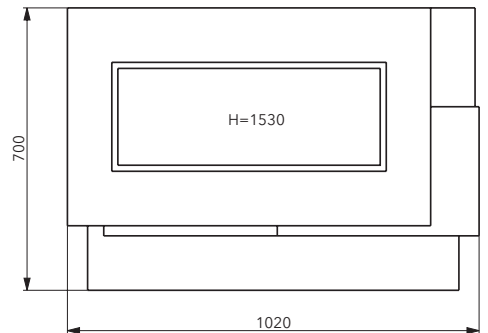

Illustrative photo - Lightweight concrete casing is delivered unpainted.



DACHSTEIN insert: Malvik IV

Highlights




External combustion air supply
ideal for low-energy houses

Capacity	3.4–7.5 kW	
Efficiency	80%	A
Heating ability	max. 135 m ³	
Dimensions h / w / d	1,631 / 620 / 540 mm	
Weight	316 kg	
Fuel consumption / h	2 kg	
Chimney draught	12 Pa	
Fuel	33 cm	
	Ø 160 mm	Ø 160 mm
Ø 100 mm		

Accessories for stoves you'll find at the end of the catalogue.



DACHSTEIN
0601852510000



FIRE FIGHTING PROTECTION (not included)


0631850100000

Fire protection can be ordered additionally necessary when installing against flammable or structurally sensitive walls.

Recommended chimney flue connection:
min. 1,290 mm,
chimney flue diameter
160 mm.

Delivery on 2 pallets
(9 parts + hearth lining).

Option for top or rear flue connection

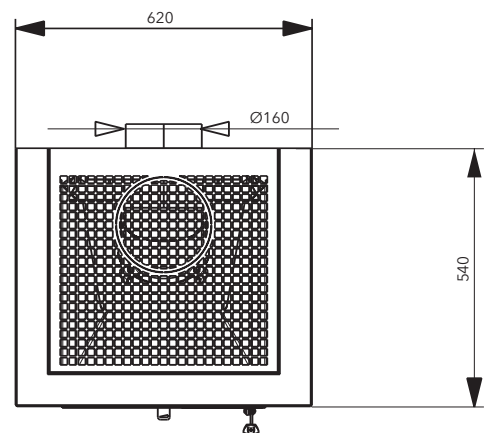

Illustrative photo - Lightweight concrete casing is delivered unpainted.

FIREPLACE SETS AND FIREPLACE INSERTS



LEVI

Highlights



Tertiary combustion
air supply directly to the flame saves fuel



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



LEVI
structured décor, horizontal
0601880610000



LEVI
smooth décor
0601880600000



LEVI
structured décor, vertical
0601880620000


FIRE FIGHTING PROTECTION
(not included)
0631880140000



You can order a practical firewood storage area for the lower section. You may choose a „smooth décor” or clean design for your firewood storage area.

Capacity	4–8.2 kW
Efficiency	80% A+
Heating ability	max. 147 m ³
Dimensions h / w / d	1,811 / 760 / 447 mm
Weight	320 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.

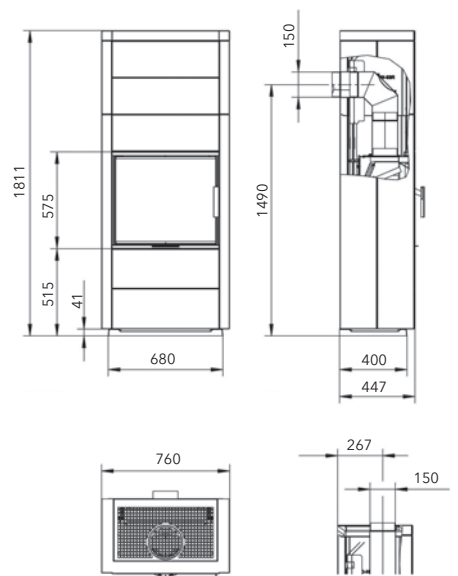



JONAVA IV

Highlights



External combustion air supply
ideal for low-energy houses



Enamel technology

Capacity	3.9-8.3 kW	
Efficiency	80%	A
Heating ability	max. 149 m ³	
Dimensions h / w / d	1,282 / 781 / 455 mm	
Weight	146 kg	
Fuel consumption / h	2.3 kg	
Chimney draught	12 Pa	
Fuel	45 cm	
	Ø 180 mm	Ø 180 mm
Ø 100 mm		


Accessories for stoves you'll find at the end of the catalogue.



JONAVA IV
black, door enamel
0618018500000



WALL FRAME
black gloss
(not included)
0618018120073

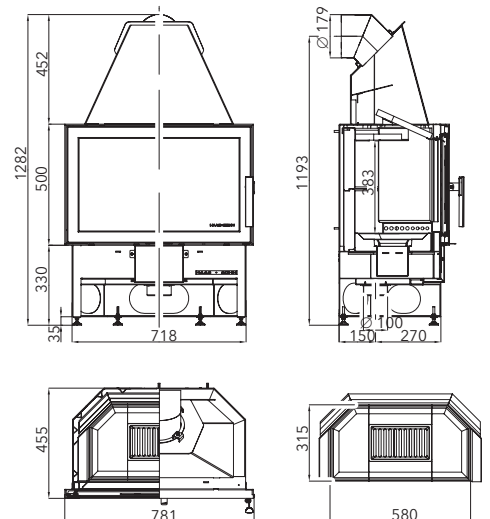

FIREPLACE SETS AND FIREPLACE INSERTS



LEVI

Highlights



Easy control

Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply

ideal for low-energy houses



Closable external air intake

central air intake closing system – no heat loss



Tertiary combustion

air supply directly to the flame saves fuel

Capacity	4–8.2 kW
Efficiency	80% A+
Heating ability	max. 147 m ³
Dimensions h / w / d	641 / 644 / 408 mm
Weight	97 kg
Fuel consumption / h	2.5 kg
Chimney draught	12 Pa
Fuel	50 cm
	Ø 150 mm Ø 150 mm
Ø 100 mm	

Accessories you'll find on the end of the catalogue.




LEVI
black
043471590000



WALL-IN FRAME
(not included)
black
0434715210400



ASSEMBLY PARTS LEVI
(not included)
black
0434715200450

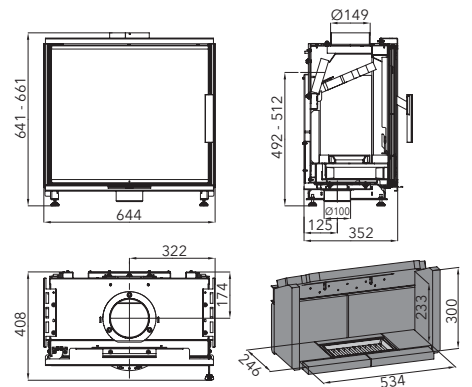



MALVIK IV

Highlights




External combustion air supply
ideal for low-energy houses

Capacity	3.4–7.5 kW
Efficiency	80% A
Heating ability	max. 135 m ³
Dimensions h / w / d	1,389 / 430 / 477 mm
Weight	120 kg
Fuel consumption / h	2 kg
Chimney draught	12 Pa
Fuel	33 cm
	Ø 160 mm Ø 160 mm
Ø 100 mm	

Accessories for stoves you'll find at the end of the catalogue.



MALVIK IV
black
0618516570000

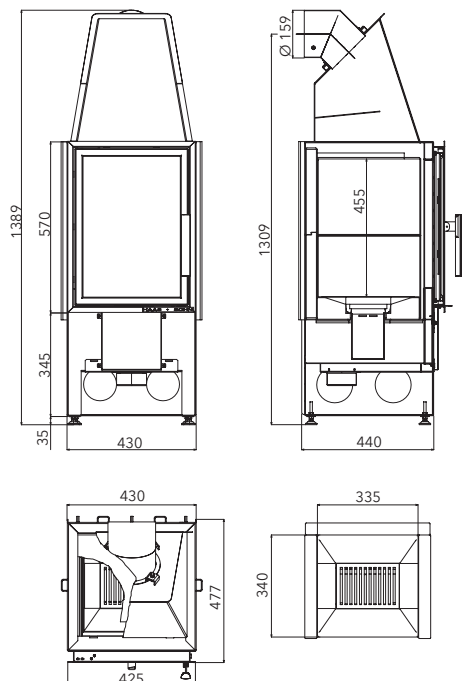

FIREPLACE INSERTS



SKARA

Highlights



Closable external air intake
central air intake closing system – no heat loss



Easy control
Easy control air inlet regulation – easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3–7 kW	
Efficiency	82%	A⁺
Heating ability	max. 126 m ³	
Dimensions h / w / d	890 / 630 / 341 mm	
Weight	88 kg	
Fuel consumption / h	2 kg	
Chimney draught	11 Pa	
Fuel	50 cm	
Ø 100 mm		Ø 150 mm
Ø 100 mm		

Accessories you'll find on the end of the catalogue.



SKARA
black,
left – glass outside, concrete
0633015300000




SKARA
black,
right – glass outside, concrete
0633015200000



LEFT SKARA FRAME
(not included)
0633015101300



RIGHT SKARA FRAME
(not included)
0633015001300

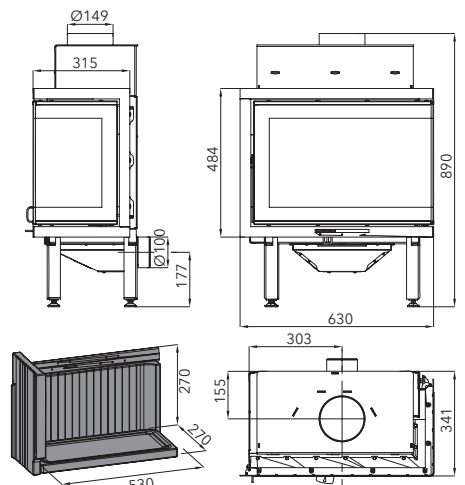

FIREPLACE ACCORDING TO YOUR TASTE

Tailored heart of your home

You already have the basics from us. The HAAS+SOHN fireplace insert can be installed according to your needs and performance in a fireplace, which can be „tailored“ to the size of your home. Whether it's in a minimalist or rustic style, looking into the fire always creates the right atmosphere for you. And you can enjoy WONDERFUL MOMENTS.

QUALITY TIMES
with our stove





SOHO

Highlights



Closable external air intake
central air intake closing system - no heat loss



Easy control
Easy control air inlet regulation - easy air supply regulation control with just one regulator



External combustion air supply
ideal for low-energy houses



Tertiary combustion
air supply directly to the flame saves fuel

Capacity	3-7 kW
Efficiency	82% A⁺
Heating ability	max. 126 m ³
Dimensions h / w / d	890 / 630 / 341 mm
Weight	79 kg
Fuel consumption / h	2 kg
Chimney draught	11 Pa
Fuel	50 cm
Ø 100 mm	Ø 150 mm
Ø 100 mm	


Accessories for stoves you'll find at the end of the catalogue.



SOHO
black, corner lining, left
063301510000



SOHO
black, corner lining, right
063301500000

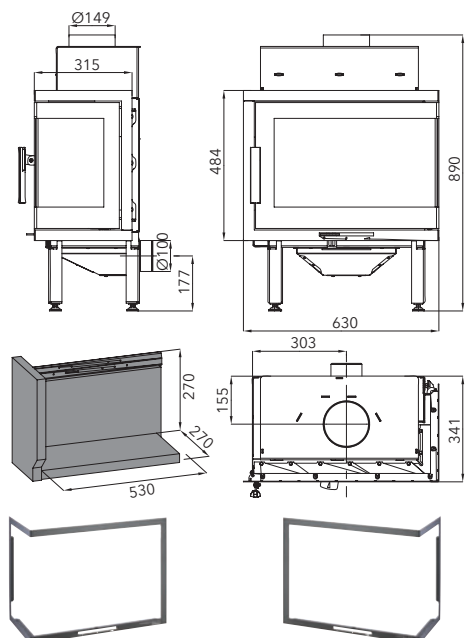

LEFT SOHO FRAME - SET
(not included)
0633015101300

RIGHT SOHO FRAME - SET
(not included)
0633015001300



NOVARA 17 WITH HEAT EXCHANGER

Highlights



External combustion air supply
ideal for low-energy houses



Automatic primary combustion air regulator
prevents problems during power outages



Cooling loop
protection from exchanger overheating




Replaceable exchanger
option of replacing the exchanger with a dummy plug



NOVARA 17*
anthracite
0618018170000

Capacity (in heaters)	5.2-17.4 kW (10.8 kW)
Efficiency	90% A+
Heating ability	max. 314 m ³
Dimensions h / w / d	1,720 / 778 / 566 mm
Weight	283 kg
Fuel consumption / h	4.5 kg
Chimney draught	12 Pa
Fuel	50 cm
	Ø 180 mm Ø 180 mm
Ø 120 mm	

Accessories you'll find on the end of the catalogue.

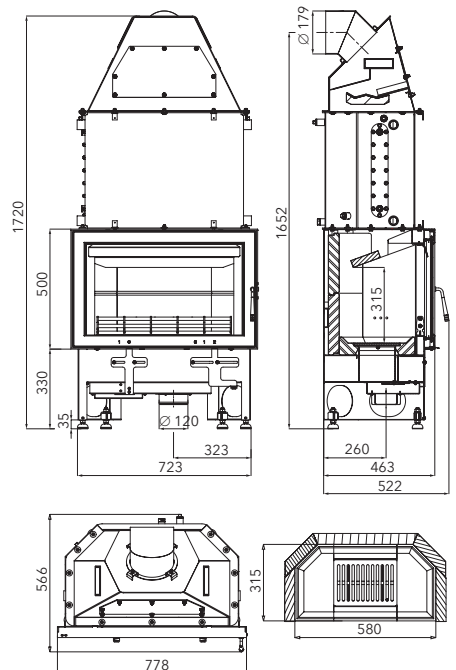

FIREPLACE INSERTS WITH HEAT EXCHANGER

*Offer valid while stocks last.

FLUE PIPES FOR FIREPLACE STOVES – SHEET METAL THICKNESS 1.5 MM

	GAS PIPE	Ø 120 mm	Ø 120 mm	Ø 120 mm		Ø 160 mm	Ø 180 mm
	Lenght	250 mm	500 mm	1000 mm		250 mm	250 mm
	Order nr. anthracite	1101122520000	1101125020000	1101129920000		-	-
	Order nr. black	-	-	-		1101162510000	110118251000
	GAS PIPE	Ø 130 mm	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm	Ø 150 mm
	Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
	Order nr. anthracite	1101132520000	1101135020000	1101139920000	1101152520000	1101155020000	1101159920000
	Order nr. black	1101132510000	1101135010000	1101139910000	1101152510000	1101155010000	1101159910000
	GGAS PIPE WITH BUTTERFLY VALVE	Ø 130 mm	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm	Ø 150 mm
	Lenght	250 mm	500 mm	1000 mm	250 mm	500 mm	1000 mm
	Order nr. anthracite	1101132620000	1101135120000	1101139820000	1101152620000	1101155120000	1101159820000
	Order nr. black	1101132610000	1101135110000	1101139810000	1101152610000	1101155110000	1101159810000
	GAS PIPE WITH CLEANING APERTURE	Ø 130 mm	Ø 130 mm	Ø 150 mm	Ø 150 mm		
	Lenght	500 mm	1000 mm	500 mm	1000 mm		
	Order nr. anthracite	1101135220000	1101139720000	1101155220000	1101159720000		
	Order nr. black	1101135210000	1101139710000	1101155210000	1101159710000		

ELBOWS AND SOCKETS FOR FIREPLACE STOVES – SHEET METAL THICKNESS 1.5 MM

	GAS ELBOW	Ø 120 mm	Ø 130 mm	Ø 150 mm	Ø 160 mm	Ø 180 mm
	Order nr. anthracite	1103129010000	1103139020000	1103159020000	-	-
	Order nr. black	-	1103139010000	1103159010000	1103169010000	1103189010000
	TWO PIECE FLUE COLLAR	Ø 120 mm	Ø 130 mm	Ø 150 mm	Ø 160 mm	Ø 180 mm
	Order nr. anthracite	1105120120000	1105130120000	1105150120000	-	-
	Order nr. black	-	1105130110000	1105150110000	1105160110000	1105180110000
	GAS ELBOW WITH CLEANING APERTURE	Ø 130 mm	Ø 150 mm			
	Order nr. anthracite	1103139120000	1103159120000			
	Order nr. black	1103139110000	1103159110000			
	GAS ELBOW 45°	Ø 130 mm	Ø 150 mm			
	Order nr. anthracite	1103134520000	1103154520000			
	Order nr. black	1103134510000	1103154510000			

ADJUSTABLE ELBOWS – SHEET METAL THICKNESS 1.5 MM

ORDER NR.	Ø 150 mm	Ø 160 mm	Ø 180 mm
UNI adjust. elbow, cleaning hole 180 / 0-180° UNI 5 segments (1.5)			1101191800000
Adjustable elbow 180 / 0-90° (1.5)			1101191810000
Adjustable elbow 180 / 0-45° (1.5)			1101191820000
UNI adjust. elbow, cleaning hole 160 / 0-180° UNI 5 segments (1.5)		1101191600000	
Adjustable elbow 160 / 0-90° (1.5)		1101191610000	
Adjustable elbow 160 / 0-45° (1.5)		1101191620000	
UNI adjust. elbow, cleaning hole 150 / 0-180° UNI 5 segments (1.5)	1101191500000		
Adjustable elbow 150 / 0-90° (1.5)	1101191510000		
Adjustable elbow 150 / 0-45° (1.5)	1101191520000		

FLUE PIPES FOR PELLET STOVES

GAS PIPE	Ø 80 mm
Lenght	250 mm
Order nr. black	1101172500000

GAS PIPE	Ø 80 mm
Lenght	500 mm
Order nr. black	1101175000000

GAS PIPE	Ø 80 mm
Lenght	1000 mm
Order nr. black	1101171000000

SET 1	1000 + 500 mm
Order nr. black	1101172700000

(pipe 1 m; pipe 0.5 m;
pipe 0.25 m; elbow 90°; T-piece;
condensation plug; 2 clamps)



T-PIECE	Ø 80 mm, 90°
Order nr. black	1101172610000



CONDENSATION PLUG	
Order nr. black	1101172620000



SEAL	
Order nr. green	1101172630000



CLAMP	
Order nr. black	1101172640000



ELBOW	Ø 80 mm
Order nr. black	1101172600000

SET 2	1000 mm
Order nr. black	1101172750000

(pipe 1 m; pipe 0.25 m;
elbow 90°; T-piece; condensation
plug; 2 clamps)



LOG BASKETS



LOG BASKETS	ANGULAR LITTER BIN
Dimensions	35 x 46 x 30 cm
Colour	black
Order nr.	1116002700000



MIDDLE BASKET	
Dimensions	40 x 24 x 36 cm
Colour	black, wood
Order nr.	1116002500000



OVAL BASKET	
Dimensions	46 x 22 x 32 cm
Colour	black, wood
Order nr.	1116002400000



BASKET BIG (WITHOUT / WITH INSTRUMENTS)	
Dimensions	68 x 48 x 45 / 70 x 49 x 46 cm
Colour	black, wood
Order nr.	1116002600000 / 1116001600000



BASKET DERBY (WITH INSTRUMENTS)	
Dimensions	68 x 48 x 45 cm
Colour	black, wood
Order nr.	1116003000000

FIREPLACE TOOLS




FIREPLACE TOOLS	BAU IV - THREE-PIECE
Dimensions	58 x 20 x 20 cm
Colour	black, wood
Order nr.	1116002200000



REPAIRING SPRAYS


REPAIRING SPRAY	COLOUR BLACK	COLOUR ANTHRACITE	COLOUR SILVER
Volume	400 ml	400 ml	400 ml
Order nr.	0070200050005	0070200020005	0070200040005

FIREPLACE STOVE GLASS FLOOR PLATES
MADE OF 6 MM THICK HARDENED GLASS

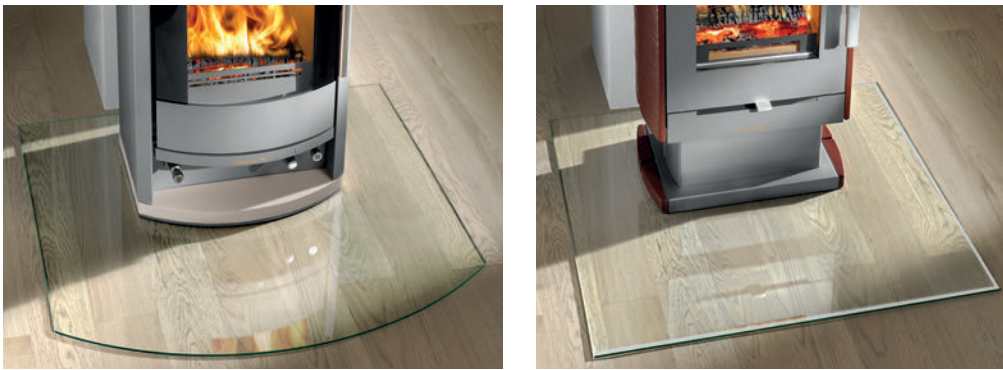


Elegant and safe


- + 6 mm thick hardened glass with polished edge
- + floor protection from scratches
- + fire protection of flammable floors (e.g. wooden floors)




GLASS FLOOR PLATES - FORM "A"




GLASS FLOOR PLATES - FORM "A"



GLASS FLOOR PLATES - FORM "B"



GLASS FLOOR PLATES - FORM "C"



GLASS FLOOR PLATES - FORM "D"

Dimensions 900 x 750 mm

Order nr. 1115409200000

Dimensions 1,000 x 1,000 mm

Order nr. 1115410200000

Dimensions 1,000 x 1,000 mm / 580 mm 45°


Order nr. 1115510200000

Dimensions 1,000 x 1,000 mm / R = 500 mm


Order nr. 1115910200000

Dimensions 1,000 x 1,000 mm

Order nr. 1115610200000



GLASS FLOOR PLATES - FORM "E"



GLASS FLOOR PLATES - FORM "F"

Dimensions 1,000 x 1000 mm / R = 800 mm

Order nr. 1115910300000

Dimensions 1,000 x 1,000 mm / R = 500 mm

Order nr. 1115910400000

FLEXI HOSES FOR CONNECTION OF EXTERNAL AIR SUPPLY

HOSE TYPE	ORDER NR.	HOSE TYPE	ORDER NR.
FLEXI HOSE FOR CPV 80/3 m	1101501000022	FLEXI HOSE FOR CPV 80/3 m black lacquer	1101501000025
FLEXI HOSE FOR CPV 100/3 m	1101501000020	FLEXI HOSE FOR CPV 100/3 m black lacquer	1101501000023
FLEXI HOSE FOR CPV 125/3 m	1101501000021	FLEXI HOSE FOR CPV 125/3 m black lacquer	1101501000024












AL TAPE (120°C) TAD 50/50, BLACK (3128D)
Order nr. 0088500140000












STEEL HOSE CLAMP BLACK
 Ø 80 mm Order nr. 0088500150000
 Ø 100 mm Order nr. 0088500160000
 Ø 125 mm Order nr. 0088500170000
 Ø 150 mm Order nr. 0088500180000

TECHNICAL PARAMETERS






PELLET STOVES

Page	Model									
12	HSP 4 PARMA	2.5-8.5	90	207	80		max. 153	1.9	32	12
13	HSP 4 PRATO	2.4-8.5	92	184	80		max. 153	1.9	17	12
14	HSP 6 RUEDA RLU	2.4-8.3	90	122		80	max. 149	1.9	32	11
15	HSP 6 RUEDA C RLU	2.4-8.3	90	163		80	max. 149	1.9	32	11
16	HSP 6 TOLEDO IV 32	2.4-8.3	90	118		80	max. 149	1.9	32	11
17	HSP 7 II	2.4-8.2	90	126		80	max. 148	1.9	12	12
18	HSP 7 II GRANDE RLU	2.4-8.2	90	132		80	max. 148	1.9	17	12
19	HSP 7 II GRANDE RLU DE LUXE	2.4-8.2	90	132		80	max. 148	1.9	17	12
20	HSP VIANO	2.4-8.6	90	99		80	max. 155	2.0	17	11

FIREPLACE STOVES WITH HEAT EXCHANGER












Page	Model									
23	HSP 6 WITH HEAT EXCHANGER	3.2-10.9 (6.8)	93	178		80	max. 196	2.41	32	12

FIREPLACE STOVES












Page	Model											
28	ANTIC	2.9-6.5	80	145	33 cm	150		max. 117	1.9			12
29	ARKTIC	3.3-12.1	80	92	50 cm	150	150	max.218	3.5			12
30	ARKTIC 12 WITH HOTPLATE	4-12.3	76	132	50 cm		150	max. 218	0.8-3.7	•	•	12
31	AXON	3-7	82	165	50 cm	150	150	max. 126	2			11
32	ČIČMANY	2-6.3	80	117	33 cm	130		max. 114	1.83	•	•	12
34	DALE	4.1-8.2	80	153	50 cm	150	150	max. 147	2.5	•	•	12
35	DALE WITH AN OVEN	4-8.1	88	231	50 cm	150		max. 146	2.2			12
36	EBOLI	2.6-8.4	76	156	33 cm	150	150	max. 144	0.7-2.4		•	12
37	EMPOLI	2.6-8.4	76	156	33 cm	150	150	max. 144	0.7-2.4		•	12
38	FARO	3-6.3	80	169	33 cm	150	150	max. 113	1.9			12
39	FIREPOT	3-6.4	81	134 / 130	33 cm		150	max. 115	1.9			11
40	FORESTA	2.7-8.1	76	72	50 cm	120		max. 146	2.5			11
41	JONSBO (TILE / STONE)	4.1-8.2	80	148 / 181	50 cm	150	150	max. 147	2.5	•	•	12
42	JONSBO WITH AN OVEN	4-8.1	88	195	50 cm	150		max. 146	2.2			12
43	LAROS (PICCOLO / GRANDE)	3-6.4	81	126 / 141	33 cm	150	150	max. 115	1.9			11
44	LEVANGER	2-6.2	77	108	33 cm	130	130	max. 111	1.8			12
45	LIRA	2-6.2	77	75	33 cm	130	130	max. 111	1.8			12
46	MADEIRA (SPECKSTEIN / WOODSTONE)	3-6.4	82	136 / 130	33 cm	150	150	max. 115	1.6			12
47	MANTA - TILED TOP PLATE + PEDESTAL	2.3-7.2	81	131	33 cm	150	150	max. 126	2.2	•	•	12
48	MOLDE	3-6.4	81	233	33 cm	150	150	max. 115	1.9			11
49	NORDBY (WOODSTONE / SPECKSTEIN)	2-6.4	80	174 / 186	33 cm	150	150	max. 113	1.8	•	•	11
50	OVALIS (GRANDE / PICCOLO)	2.5-5.3	81	127 / 117	30 cm	150	150	max. 95	1.5			12
51	PINEROLO (WOODSTONE / SPECKSTEIN)	3-6.4	82	179 / 208	33 cm	150	150	max. 115	1.5			12
52	PISA RLU	2.6-5.4	87	122	33 cm	150	150	max. 97	1.2			12
54	SALERNO II	2.1-4.4	84	92	29 cm	120	120	max. 79	1.1			12
55	SARA	2-6.3	80	91	30 cm	130		max. 114	1.8	•	•	12
56	SKARNES	2.7-8.3	75	126	50 cm	150	150	max. 149	2.5			12
57	SKIVE II	4-12.3	77	125	50 cm	150	150	max. 221	3.1	•	•	12
58	TREVISO MINI	2-6.3	80	115	33 cm	130		max. 114	1.8	•	•	12
59	UKA	2-6.2	77	86	33 cm	130	130	max. 111	1.8			12

TECHNICAL PARAMETERS





FIREPLACE STOVES WITH HEAT EXCHANGER

Page	Model											
64	ADRIA II WITH HEAT EXCHANGER	3.4-10.5 (5)	81	136	33 cm	150		max. 181	2.9	•	•	12
65	ANDRUS WITH HEAT EXCHANGER	5-14.9 (10.1)	85	246	33 cm	150		max. 268	4.1	•	•	12
66	AVESTA II WITH HEAT EXCHANGER	3.3-10.2 (7.8)	79	196	33 cm	150		max. 184	3.1			11
67	EBOLI AL II WITH HEAT EXCHANGER / COOL. LOOP	4-12.2 (8.5)	82	166	33 cm	150	150	max. 218	3.5	•	•	12
68	EMPOLI AL II WITH HEAT EXCHANGER / COOL. LOOP	4-12.2 (8,5)	82	166	33 cm	150	150	max. 218	3.5	•	•	12
70	FARUM WITH HEAT EXCHANGER	5-14.9 (10.1)	85	264	33 cm	150		max. 268	4.1	•	•	12
71	MANTOVA AL II (PAVING / SHEETING) WITH HEAT EXCH.	3.3-10 (7.4)	80	134 / 128		150	150	max. 181	2.7	•		12
72	NIVALA WITH HEAT EXCHANGER	5-15.3 (10.1)	85	221	33 cm	150		max. 268	4.1	•	•	12
73	TREVISO II - TILED PEDESTAL WITH HEAT EXCHANGER	2.7-8.2 (5)	80	203	33 cm	150		max. 143	2.5			12
74	WERFEN 9 WITH HEAT EXCHANGER	4-12.2 (8.4)	80	221	50 cm	160		max. 220	3.6			11


FIREPLACE SETS

Page	Model												
78	ADONIS II	3.9-8.3	80	448	50 cm	180	180	max. 149	2.3	678 × 400			12
79	ARLBERG	3.9-8.3	80	464	45 cm	180	180	max. 149	2.3	678 × 400			12
80	ASCIM II	3.4-7.5	80	425	33 cm	160	160	max. 135	2	325 × 470			12
81	DACHSTEIN	3.4-7.5	80	316	33 cm	160	160	max. 135	2	325 × 470			12
82	LEVI	4-8.2	80	320	50 cm	150	150	max. 147	2.5		•	•	12


FIREPLACE INSERTS

Page	Model												
83	JONAVA IV	3.9-8.3	80	146	45 cm	180	180	max. 149	2.3	678 × 400			12
84	LEVI	4-8.2	80	97	50 cm	150	150	max. 147	2.5		•	•	12
85	MALVIK IV	3.4-7.5	80	120	33 cm	160	160	max. 135	2	325 × 470			12
86	SKARA	3-7	82	88	50 cm	150		max. 126	2.0				11
88	SOHO	3-7	82	79	50 cm	150		max. 126	2				11

FIREPLACE INSERTS WITH HEAT EXCHANGER

Page	Model												
89	NOVARA 17 WITH HEAT EXCHANGER	5.2-17.4 (10.8)	90	283	50 cm	180	180	do 314	4.5	678 × 400			12

EXPLANATORY NOTES

-  Capacity (kW)
  Rear flue-gas outlet (Ø mm)
  Heating ability (m³)
  Dimensions of glass w × d (mm)
-  Efficiency (%)
  Lump wood (max. length in cm)
  Fuel consumption (kg/h)
-  Weight (kg)
  Environment friendly pressed fuel
  Chimney draught (Pa)
-  Top flue-gas outlet (Ø mm)
  Brown-coal briquettes
  Volume of pellet container (kg)

QUALITY TIMES

with our stove

HAAS+SOHN

@haassohnrukov



HAAS+SOHN RUKOV s. r. o.

Nádražní 260
407 56 Jiřetín pod Jedlovou
Czech Republic

Phone: +420 412 510 101

prodej@haassohn.com
www.haassohn-rukov.com

Your HAAS+SOHN dealer: